

FRESH THINKING FOR SALTWATER.

We've got news for you, captain. You may not want to hear it, but saltwater is due for a sea change. There's a shakeup coming. And it won't be led by pleasure boaters, stubborn old sailors or wannabes. It will come from hardcore fishermen. Who aren't beholden to the status quo. Who can see the water with fresh eyes. And admit it's time to find a better route. To dig deeper. To bring it all together. We've arrived, and the water will never be quite the same.

CONTENTS

4 | One-Boat Network

6 | Sonar




10 | APEX Series

14 | SOLIX Series

18 | HELIX Series

24 | Product Specifications

32 | Accessories

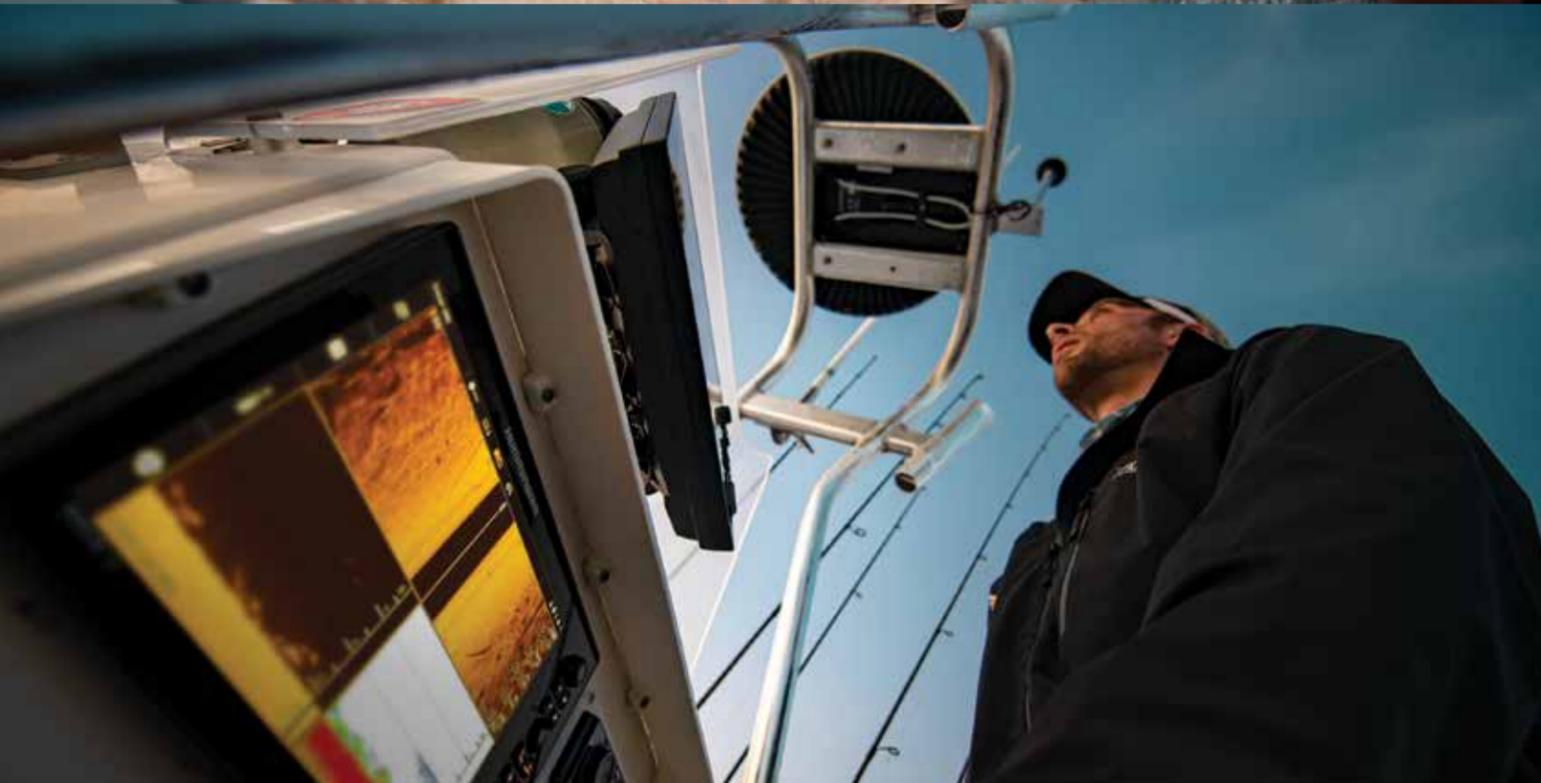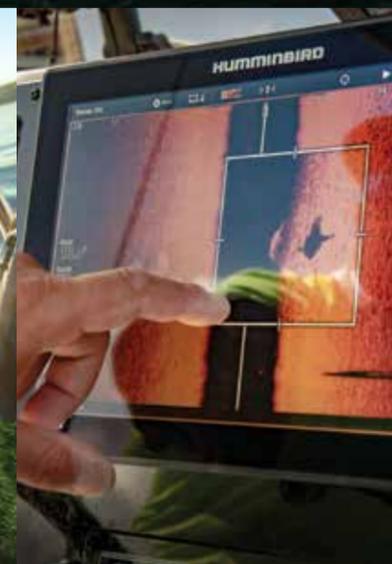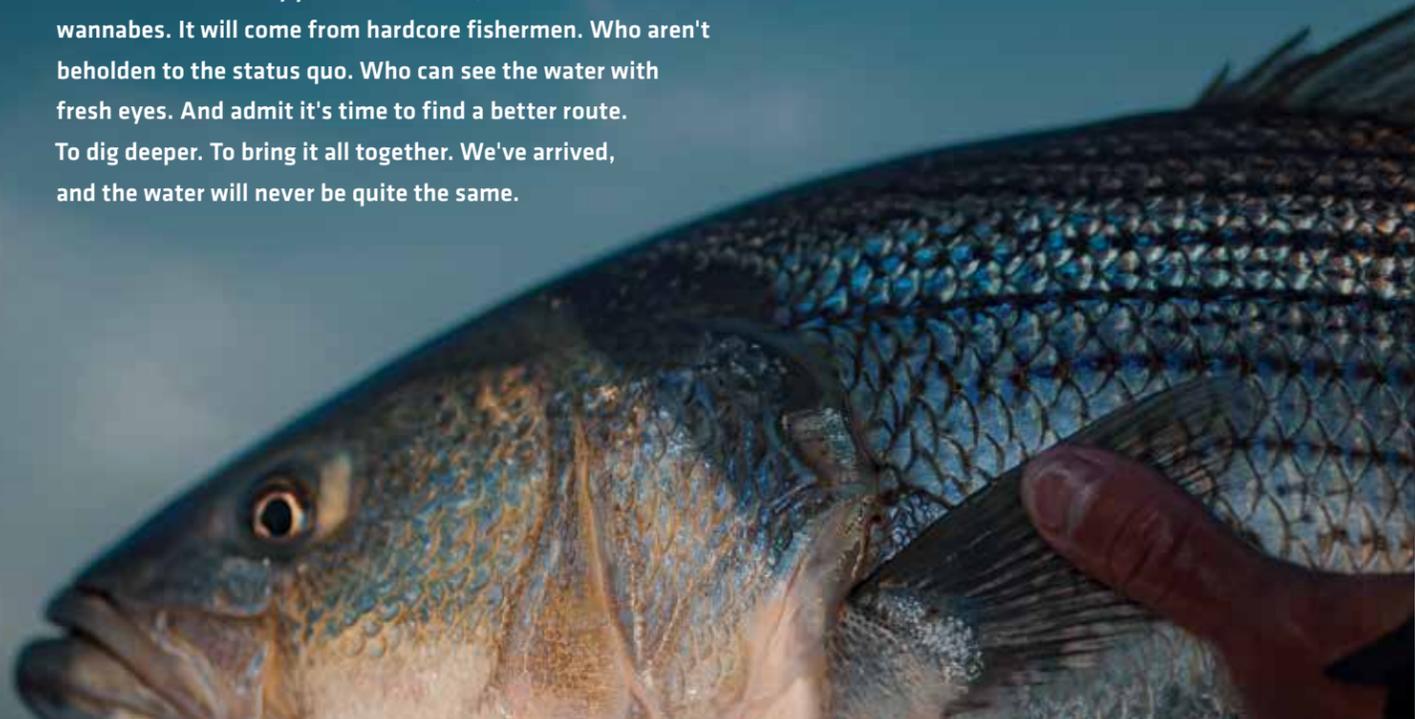

WELCOME TO THE ONE-BOAT NETWORK

Humminbird®, Minn Kota® and Cannon® share more than just a physical address. We share a passion for fishing and a mission to craft gear that lets you enjoy your time on the water even more. That's why we created the One-Boat Network™: a commitment to make the most advanced fishing gear even better, by making it work together. Our engineering teams constantly look for ways our products can seamlessly integrate and communicate, unlocking more features, capabilities and potential for anglers everywhere.



-  HUMMINBIRD MEGA LIVE AND MEGA 360 TRANSDUCERS
-  MINN KOTA TROLLING MOTOR WITH I-PILOT LINK™ GPS SYSTEMS AND BUILT-IN MEGA IMAGING®
-  MINN KOTA TALON FOOT SWITCH
-  HUMMINBIRD MULTI-FUNCTION DISPLAYS
-  HUMMINBIRD COASTMASTER® CHARTS
-  MINN KOTA SHALLOW WATER ANCHORS
-  MINN KOTA REMOTES FOR TROLLING MOTORS AND SHALLOW WATER ANCHORS
-  MINN KOTA MOBILE APPS
-  HUMMINBIRD FISHSMART™ APP
-  CANNON OPTIMUM DOWNRIGGER



AUTOMATIC NAVIGATION

Focus on fishing, and let your Humminbird do the rest. From your fish finder, select a depth contour (or the shoreline) and activate Follow. Your motor will kick in, find the contour and automatically run your boat along it.




TROLLING MOTOR CONTROL

Mind over motor. Direct from your Humminbird unit, take command of your trolling motor to easily steer, engage Spot-Lock™ and, with an Ulterra® motor, stow or deploy.



INSTANT ANCHORING

Hold it right there. Bluetooth®-capable Humminbird models can communicate wirelessly with Minn Kota Talon and Raptor shallow water anchors to deploy, retract and adjust anchor settings.



PRECISION FISHING

Stay on target. Control up to four Cannon Optimum™ downriggers right from your Humminbird. Display and control downrigger operations and settings either together or individually.




ON-THE-GO ACCESS

Take Humminbird with you. The FishSmart app lets you transfer software updates wirelessly to your Humminbird unit, view and manage your network and connect with technical support.




BRING FISH INTO FOCUS.


How well do you know the waters you fish? Not as well as you might think. From coast to coast, more anglers are finding fish they didn't know were there, thanks to the clarity of MEGA Imaging, pioneered by Humminbird and built into APEX™, SOLIX® and select HELIX® Series models. Using this high-frequency sonar, you can easily distinguish baitfish from gamefish, see the direction fish are facing and even target individual species. Choose MEGA Side Imaging® for an incredible view to the left and right of your boat. Opt for MEGA Down Imaging® for a crystal-clear picture below your boat. Put yourself at the center of the underwater scene with MEGA 360 Imaging®, revealing every detail in every direction. Or, for must-watch detail and non-stop action, switch on new MEGA Live Imaging™ and see a real-time view of what's below and around your boat. With MEGA Imaging, the options are endless, and if you're crafty enough, your fishing streak can be, too.

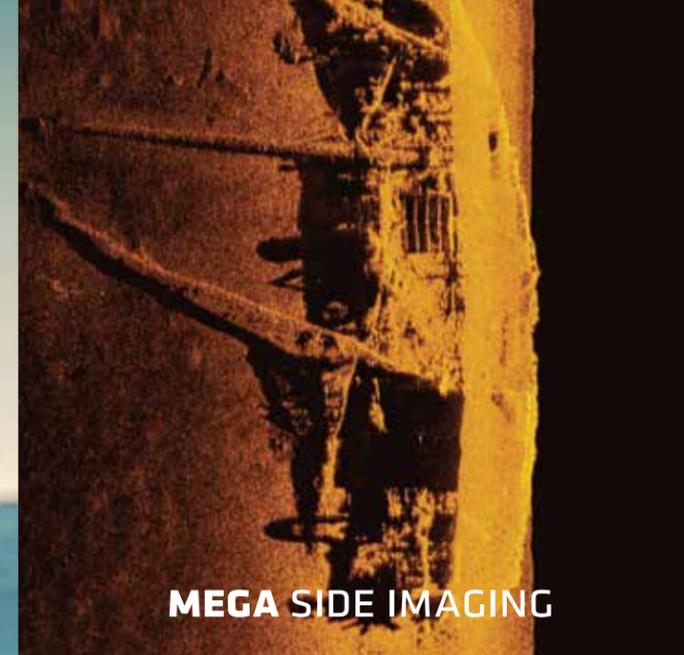

MEGA SIDE IMAGING

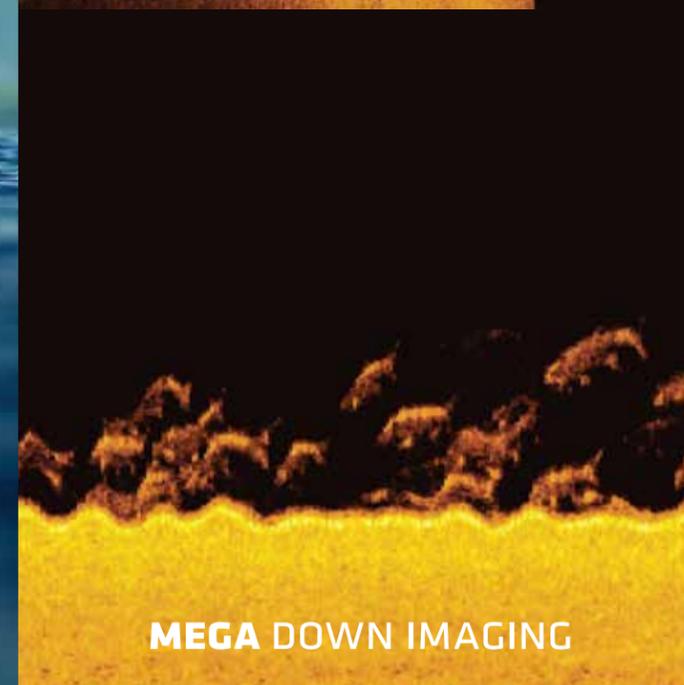

MEGA DOWN IMAGING

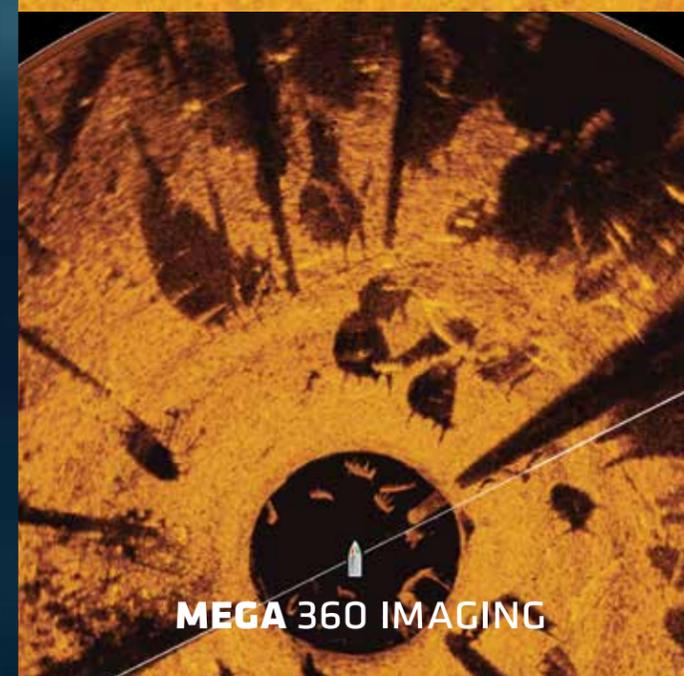


MEGA 360 IMAGING

HUMMINBIRD

DUAL SPECTRUM CHIRP

BEGIN YOUR SEARCH WITH BETTER HARDWARE.

Don't let the pretty pictures fool you. Our proprietary, Low Q CHIRP transducer is the real hero. Using more coverage to detect fish, structure and the bottom, this workhorse makes possible the highly defined fish arches and clear target separation of Dual Spectrum CHIRP Sonar. Ounce for ounce, pulse for pulse, it's the best sonar in its class. No contest. Available on APEX, SOLIX and select HELIX models.

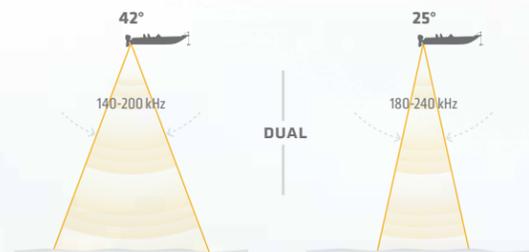

WIDE MODE Maximum Coverage


Search far and wide. Opt for Wide Mode when vertical jigging, in shallow water or when you just want to see a wider view of the world below.

NARROW MODE Maximum Detail

Hone in on the small stuff that makes a big difference. Narrow Mode lets you target individual fish, or separate fish from structure and the bottom with laser precision.


STRONG RETURNS WITHOUT NOISE

Stop seeing things that aren't there. A high signal-to-noise ratio translates to better defined targets, less clutter and greater certainty that what you're looking at on-screen is legit.

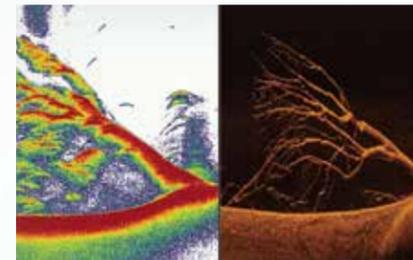



SUPERIOR TARGET SEPARATION

Separating fish from their habitat is the name of the game. And now, you'll be able to more easily tell the difference between bait and game fish, and nearby structure and vegetation.

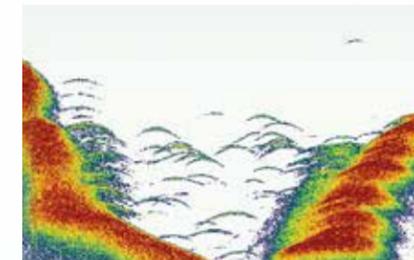

CLEARLY DEFINED FISH ARCHES

We've got bad news for your arch nemesis. Large game fish will show up on your screen as long, well-defined arches, for quick identification and accurate lure presentation.

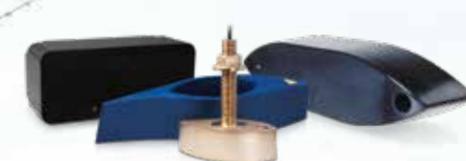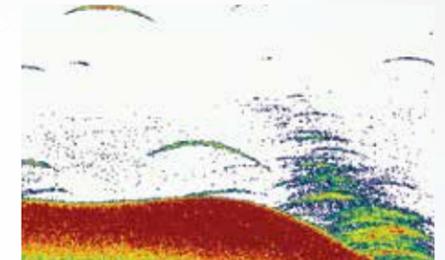

AIRMAR CHIRP TRANSDUCERS

For deepwater applications, easily connect an Airmar transducer to your APEX or SOLIX head unit. The Airmar® transducer ID feature instantly recognizes which transducer you've installed and auto-configures your CHIRP frequency settings to optimize performance. Select HELIX models are also compatible with Airmar transducers. For more information, talk to your dealer or visit AirmarTechnology.com.



NEW APEX SERIES

CLARITY HAS REACHED A NEW PEAK.

Welcome to the top. The new APEX Series delivers the clearest view of sonar and charts to hit saltwater. Know exactly what's under and around your boat, viewing fish, structure, surroundings and points of interest on the crystal-clear full-HD screen. Add the power of advanced networking features like NMEA 2000®, Dual Ethernet ports and the One-Boat Network to unlock even more fish-finding and boat-control capabilities. Built specifically for serious anglers, the APEX Series can help take your fishing success to the next level.



LOOK SHARP

The slim-fit, full-HD Cross Touch® display of the APEX Series offers a crystal-clear view of what's below. And with multiple in-dash mounting options, its sleek design will look just as sharp on your helm. From sonar to navigation to vessel information, the full-HD screen brings every detail to life with eye-popping clarity, so you can find and catch more fish.

SEAMLESS FISHING

Rig your boat to give yourself the ultimate advantage on the water. The APEX Series provides advanced networking options you would expect, plus premium options like dual channel CHIRP sonar, dual Ethernet ports, HDMI video input/outputs and CZONE digital switching support. With the option to customize screen combinations and data readouts, you can take full advantage of your fully connected fishing machine.



APEX SERIES

FULL-HD DISPLAY
1920x1080

CROSS TOUCH
INTERFACE

DUAL CORE
PROCESSOR

CONNECTIVITY

Ethernet (Dual Ports)
Bluetooth
Wi-Fi
NMEA 2000
HDMI Video In/Out
CZONE Digital Switching
CHIRP Radar
AIS
VHF Radio

SONAR

MEGA Imaging+
Dual Spectrum CHIRP
Dual Channel CHIRP Sonar
Airmar xID
MEGA 360 Imaging*
MEGA Live Imaging*

GPS/CHARTS

Built-In GPS
Humminbird BaseMap
AutoChart® Live
LakeMaster®**
CoastMaster*
Navionics*



ONE-BOAT
NETWORK™

*Compatible





APEX SERIES

NETWORKING



APEX Series is part of the One-Boat Network (See page 4).



APEX SERIES | MEGA SI+ CHARTPLOTTER

Feast your eyes. Choose the APEX Series display that best matches your requirements and console dimensions. All APEX models are compatible with the One-Boat Network and offer a full complement of Humminbird sonar and mapping technologies, starting with the incredible clarity of MEGA Side Imaging+™.



APEX 19 MEGA SI+ CHARTPLOTTER
FULL HD 18.5" DISPLAY / 1920H X 1080V
#411240-1
#411240-1CHO (CONTROL HEAD ONLY)

APEX 16 MEGA SI+ CHARTPLOTTER
FULL HD 15.6" DISPLAY / 1920H X 1080V
#411500-1
#411500-1CHO (CONTROL HEAD ONLY)

APEX 13 MEGA SI+ CHARTPLOTTER
FULL HD 13.3" DISPLAY / 1920H X 1080V
#411470-1
#411470-1CHO (CONTROL HEAD ONLY)

CHO MODELS (CONTROL HEAD ONLY)

Want to add a new unit to an existing Humminbird network, or select your own transducer? A CHO model gives you the freedom to choose. View our accessory transducer options, including the MEGA Imaging stainless steel thru-hull, and find the right one for you on pages 38-39.



AIRMAR CHIRP TRANSDUCERS

The APEX Series is compatible with Airmar's CHIRP-ready transducers and includes Airmar xID for simple configuration and the best possible sonar picture. Trusted by commercial fishermen and tournament anglers everywhere, Airmar will help you find fish at depths that were previously unimaginable. Learn more at airmar.com.



- FULL HD 1920x1080 DISPLAY
- CROSS TOUCH INTERFACE
- MEGA SIDE IMAGING+
- MEGA DOWN IMAGING+
- DUAL SPECTRUM CHIRP
- DUAL CHANNEL CHIRP SONAR
- PRECISION GPS
- HUMMINBIRD BASEMAP
- AUTOCHART LIVE
- DUAL PORT ETHERNET
- HDMI IN/OUT
- WI-FI
- NMEA 2000



ADD ONS

- MEGA LIVE IMAGING™
- MEGA 360 IMAGING™
- i-PILOT™ LINK
- CHIRP RADAR

Humminbird LakeMaster | Humminbird LakeMaster PLUS
Humminbird CoastMaster | Humminbird SmartStrike
Humminbird AutoChart Live Zero Line | Navionics | Navionics+
Navionics HotMaps Platinum | Navionics Platinum+ | Minn Kota Talon
Minn Kota Raptor | AIS | AutoPilot | GPS Heading Sensor
5-Port Ethernet Switch | CZONE Contact 6/Contact 6 Plus 6 Digital Switching



FISHSMART APP COMPATIBLE
Update software and access technical support using the FishSmart app. See details at Humminbird.com/Learn/FishSmart-App.

NEW SOLIX SERIES

G3

MORE IS MORE.

Some anglers expect more—from themselves, from their tackle, from their technology. If that's you, look no further. The SOLIX Series gives you everything you need to dominate the water, with an intuitive interface, all the customization options to make it your own and now ultra-responsive performance, thanks to a new dual core processor. You'll also have access to some of the biggest innovations on the water, including MEGA Imaging, Dual Spectrum CHIRP, AutoChart Live, Wi-Fi, Bluetooth and NMEA 2000 connectivity. So stop settling for less, and get ready for more.




ADVANCED NETWORKING

Supports Ethernet and Bluetooth for connection to One-Boat Network and includes compatibility for NMEA 2000®, Wi-Fi, CZONE, Airmar xID, CHIRP Radar, AIS and VHF accessories.



MAKE SOLIX YOUR OWN

Instantly take command of exclusive technologies like MEGA Imaging, Dual Spectrum CHIRP and AutoChart Live, and customize up to four independent viewing panes to your needs and situation. A customized sidebar provides quick access to your favorite views, navigational data, vessel information and accessories like Minn Kota Talon and i-Pilot Link. In addition, make SOLIX your own with the ability to customize your home screen wallpaper.

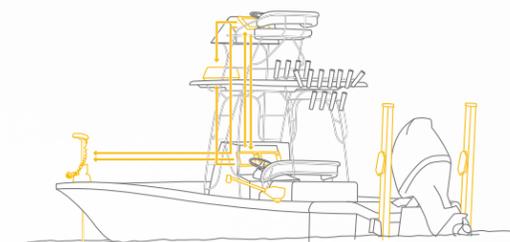

CROSS TOUCH

Take command of the display like never before with Cross Touch. Everything you can do with the touchscreen, you can also do with the keypad—so rough conditions will never compromise your control.

SOLIX SERIES

HD DISPLAY
1280x800

CROSS TOUCH
INTERFACE

DUAL CORE
PROCESSOR

CONNECTIVITY

- Ethernet
- Bluetooth
- Wi-Fi
- NMEA 2000
- CZONE Digital Switching
- CHIRP Radar
- AIS
- VHF Radio

SONAR

- MEGA Imaging+
- Dual Spectrum CHIRP
- Airmar xID
- MEGA 360 Imaging*
- MEGA Live Imaging*

GPS/CHARTS

- Built-In GPS
- Humminbird BaseMap
- AutoChart Live
- LakeMaster*
- CoastMaster*
- Navionics*



ONE-BOAT
NETWORK™

*Compatible





SOLIX SERIES

G3 NETWORKING



SOLIX Series G3 is part of the One-Boat Network (See page 4).



SOLIX SERIES **G3** | MEGA SI+ · MEGA DI+ · CHIRP · GPS

Size matters. Select the SOLIX Series display that best meets your fishing needs and boat. All SOLIX models are compatible with the One-Boat Network and offer a complete arsenal of Humminbird sonar and mapping technologies, starting with the incredible clarity of MEGA Side Imaging+.



SOLIX 15 MEGA SI+ GPS **G3**
 HD 15.4" DISPLAY / 1280H X 800V
 #411570-1
 #411570-1CHO (CONTROL HEAD ONLY)

SOLIX 12 MEGA SI+ GPS **G3**
 HD 12.1" DISPLAY / 1280H X 800V
 #411550-1
 #411550-1CHO (CONTROL HEAD ONLY)

SOLIX 10 MEGA SI+ GPS **G3**
 HD 10.1" DISPLAY / 1280H X 800V
 #411530-1
 #411530-1CHO (CONTROL HEAD ONLY)

CHO MODELS (CONTROL HEAD ONLY)

Want to add a new unit to an existing Humminbird network, or select your own transducer? A CHO model gives you the freedom to choose. View our accessory transducer options, including a built-in MEGA Imaging trolling motor from Minn Kota. Find the right one for you on pages 38-39.



AIRMAR CHIRP TRANSDUCERS

The SOLIX Series is compatible with Airmar's CHIRP-ready transducers and includes Airmar xLD for simple configuration and the best possible sonar picture. Trusted by commercial fishermen and tournament anglers everywhere, Airmar will help you find fish at depths that were previously unimaginable. Learn more at Airmar.com.



- CROSS TOUCH INTERFACE
- MEGA SIDE IMAGING+
- MEGA DOWN IMAGING+
- DUAL SPECTRUM CHIRP
- PRECISION GPS
- HUMMINBIRD BASEMAP
- AUTOCHART LIVE
- ETHERNET NETWORKING
- WI-FI
- NMEA 2000
- Bluetooth

BUILT-IN TECHNOLOGIES VARY BY MODEL - SEE PAGE 25

ADD ONS

- MEGA LIVE IMAGING
- MEGA 360 IMAGING
- i-PILOT LINK
- CHIRP RADAR

Humminbird LakeMaster | Humminbird LakeMaster PLUS | Humminbird CoastMaster
 Humminbird SmartStrike | Humminbird AutoChart Live Zero Line | Navionics | Navionics+
 Navionics HotMaps Platinum | Navionics Platinum+ | Minn Kota Talon | Minn Kota Raptor | AIS | AutoPilot
 GPS Heading Sensor | 5-Port Ethernet Switch | CZONE Contact 6/Contact 6 Plus 6 Digital Switching



FISHSMART APP COMPATIBLE

Update software and access technical support using the FishSmart app. See details at Humminbird.com/Learn/FishSmart-App.

NEW

HELIX SERIES

G4N


FISHING RUNS IN THE FAMILY.

Every moment on the water matters. Don't waste a second messing around with your fish finder. The HELIX Series puts you on fish faster with an easy-to-use interface. You'll have innovative technologies at your command with options including MEGA Imaging+™, Dual Spectrum CHIRP, AutoChart Live, Ethernet, Bluetooth, Wi-Fi and NMEA 2000 connectivity.

Pick your choice of screen size and choose from either the One-Boat Network-compatible HELIX G4N Series, or a standalone HELIX G3/G2 model. All are ready to fish right out of the box, because at Humminbird, simplicity is in our DNA.

QUICK AND INTUITIVE KEYPAD CONTROL

Master HELIX at the touch of a button. Access the preloaded views from the user-friendly menu system. Soft key controls allow you to reliably operate your fish finder in any condition.

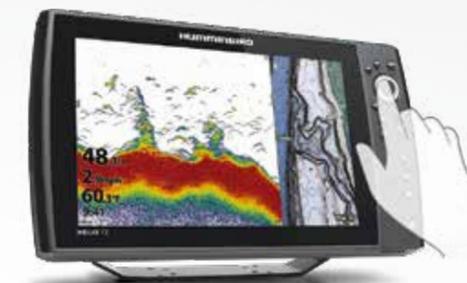

INDUSTRY-LEADING SONAR AND BUILT-IN GPS

See more of what you want with innovative sonar technologies like Dual Spectrum CHIRP (2D) sonar and available MEGA Imaging+. Built-in GPS and Humminbird Basemap will show you the way, with premium chart options from CoastMaster, LakeMaster and Navionics.

NETWORKING COMPATIBLE

HELIX G4N Series comes standard with Ethernet networking and Bluetooth connectivity, allowing connection between other Humminbird fish finders and One-Boat Network products. Additionally, take advantage of built-in Wi-Fi and NMEA 2000 for data from other accessories on your boat.



HELIX SERIES

HD DISPLAY
1280x800
15" | 12" models
1024x600
10" | 9" | 8" models

CONNECTIVITY
Ethernet
Bluetooth
Wi-Fi
NMEA 2000
Humminbird CHIRP Radar

SONAR
MEGA Imaging+
Dual Spectrum CHIRP
MEGA 360 Imaging*
MEGA Live Imaging*

GPS/CHARTS
Built-In GPS
Humminbird BaseMap
AutoChart Live
LakeMaster*
CoastMaster*
Navionics*



ONE-BOAT NETWORK™

*Compatible





HELIX SERIES

G4N + G3N NETWORKING



HELIX Series G4N/G3N is part of the One-Boat Network (See page 4).

HELIX SERIES | MEGA SI · MEGA DI · CHIRP · GPS

Get everything, plus the kitchen sink. These HELIX Series models are One-Boat Network compatible and fully stocked with Humminbird innovations, from incredible MEGA Side Imaging on down the line. Choose from a variety of screen sizes to match your fishing needs and boat.



- HELIX 15 MEGA SI+ GPS** G4N
HD 15.4" DISPLAY / 1280H X 800V
#411320-1 | #411320-1CHO (CONTROL HEAD ONLY)
- HELIX 12 MEGA SI+ GPS** G4N
HD 12.1" DISPLAY / 1280H X 800V
#411450-1 | #411450-1CHO (CONTROL HEAD ONLY)
- HELIX 10 MEGA SI+ GPS** G4N
HD 10.1" DISPLAY / 1024H X 600V
#411420-1 | #411420-1CHO (CONTROL HEAD ONLY)
- HELIX 9 MEGA SI+ GPS** G4N
HD 9" DISPLAY / 1024H X 600V
#411380-1 | #411380-1CHO (CONTROL HEAD ONLY)
- HELIX 8 MEGA SI+ GPS** G4N
HD 8" DISPLAY / 1024H X 600V
#411350-1 | #411350-1CHO (CONTROL HEAD ONLY)
- HELIX 7 MEGA SI GPS** G3N
HD 7" DISPLAY / 800H X 480V
#411080-1

HELIX SERIES | MEGA DI · CHIRP · GPS

Look out below. Starting with MEGA Down Imaging, these HELIX Series models offer a clearer view of what's underneath your boat, plus One-Boat Network compatibility and a strong mix of other sonar and mapping technologies. Select the screen size that best matches your needs.



- HELIX 15 MEGA DI+ GPS** G4N
HD 15.4" DISPLAY / 1280H X 800V
#411310-1CHO (CONTROL HEAD ONLY)
- HELIX 12 MEGA DI+ GPS** G4N
HD 12.1" DISPLAY / 1280H X 800V
#411440-1 | #411440-1CHO (CONTROL HEAD ONLY)
- HELIX 10 MEGA DI+ GPS** G4N
HD 10.1" DISPLAY / 1024H X 600V
#411410-1 | #411410-1CHO (CONTROL HEAD ONLY)
- HELIX 9 MEGA DI+ GPS** G4N
HD 9" DISPLAY / 1024H X 600V
#411370-1 | #411370-1CHO (CONTROL HEAD ONLY)
- HELIX 8 MEGA DI GPS** G4N
HD 8" DISPLAY / 1024H X 600V
#411340-1 | #411340-1CHO (CONTROL HEAD ONLY)
- HELIX 7 MEGA DI GPS** G3N
HD 7" DISPLAY / 800H X 480V
#411070-1 | #411070-1CHO (CONTROL HEAD ONLY)

HELIX SERIES | CHIRP · GPS

If it's a better view you're after, start here. Offering the impressive detail of Dual Spectrum CHIRP Sonar, these HELIX Series models capture a solid mix of features to help you catch more fish. One-Boat Network compatibility and lots of screen sizes give you plenty of options.



- HELIX 12 CHIRP GPS** G4N
HD 12.1" DISPLAY / 1280H X 800V
#411430-1
- HELIX 10 CHIRP GPS** G4N
HD 10.1" DISPLAY / 1024H X 600V
#411400-1
- HELIX 9 CHIRP GPS** G4N
HD 9" DISPLAY / 1024H X 600V
#411360-1
- HELIX 8 CHIRP GPS** G4N
HD 8" DISPLAY / 1024H X 600V
#411330-1
- HELIX 7 CHIRP GPS** G3N
HD 7" DISPLAY / 800H X 480V
#411060-1 | #411210-1 (ALL SEASON)



BUILT-IN TECHNOLOGIES VARY BY MODEL - SEE PAGES 26-30



ADD ONS



Humminbird LakeMaster | Humminbird LakeMaster PLUS
Humminbird CoastMaster | Humminbird SmartStrike
Humminbird AutoChart Live Zero Line | Navionics | Navionics+
Navionics HotMaps Platinum | Navionics Platinum+ | SM3000 Blackbox CHIRP
Minn Kota Talon | Bluetooth Remote | AIS | NMEA 2000 | AutoPilot
GPS Heading Sensor | 5-Port Ethernet Switch



FISHSMART APP COMPATIBLE
Update software and access technical support using the FishSmart app. See details at Humminbird.com/Learn/FishSmart-App.

CHO MODELS (CONTROL HEAD ONLY)
Want to add a new unit to an existing Humminbird network, or select your own transducer? A CHO model gives you the freedom to choose. View our accessory transducer options, including a built-in MEGA Imaging trolling motor from Minn Kota. Find the right one for you on pages 38-39.



HELIX SERIES

G3 + G2 NON-NETWORKING

Sometimes, fishing is a sport best enjoyed solo. These standalone HELIX Series fish finders offer an impressive array of features, from MEGA Imaging to Dual Spectrum CHIRP sonar, to Humminbird LakeMaster compatibility. No matter the size of your crew or your boat, there's something here for everyone.

HELIX 7 SERIES G3 GPS MODELS



HELIX 7 MEGA SI GPS G3
HD 7" DISPLAY / 800H X 480V
#410950-1

HELIX 7 MEGA DI GPS G3
HD 7" DISPLAY / 800H X 480V
#410940-1

HELIX 7 CHIRP GPS G3
HD 7" DISPLAY / 800H X 480V
#410930-1

HELIX 5 SERIES G2 GPS MODELS



HELIX 5 SI GPS G2
HD 5" DISPLAY / 800H X 480V
#410230-1

HELIX 5 DI GPS G2
HD 5" DISPLAY / 800H X 480V
#410220-1

HELIX 5 CHIRP GPS G2
HD 5" DISPLAY / 800H X 480V
#410210-1
#410260-1 (PORTABLE)
#411190-1 (ALL SEASON)

HELIX 5 SERIES G2 NON-GPS MODELS



HELIX 5 DI G2
HD 5" DISPLAY / 800H X 480V
#410200-1

HELIX 5 SONAR G2
HD 5" DISPLAY / 800H X 480V
#410190-1
#410250-1 (PORTABLE)



PORTABLE MODELS
include a soft-sided carrying case with a suction cup transducer, 7Ah battery and charger.



BUILT-IN TECHNOLOGIES VARY BY MODEL - SEE PAGES 30-31

ADD ONS
(GPS MODELS ONLY)
Humminbird LakeMaster | Humminbird LakeMaster PLUS | Humminbird CoastMaster | Humminbird SmartStrike
Humminbird AutoChart Live Zero Line | Navionics | Navionics+ | Navionics HotMaps Platinum | Navionics Platinum+

APEX SERIES

19 / 16 / 13



APEX 19 MEGA SI+ CHARTPLOTTER
#411240-1

Additional Model Options	APEX 19 MEGA SI+ CHO (Control Head Only) #411240-1CHO
Interface	Multi-Gesture Touchscreen + Keypad Control
Display Size & Pixel Matrix	18.5" Diagonal 1920H x 1080V
Bluetooth	Built-In
Wi-Fi	Built-In
Water Surface Temp	Built-In Transducer
Speed	GPS Speed Included
Waterproof Class	IPX7
Mounting Options	Gimbal, Front In-Dash or Optional Rear In-Dash
Transducer Included	XM 14 HW MSI T (Transom Mount)
Power Input	10.8-20 VDC
Power Draw	4.4 Amps



APEX 16 MEGA SI+ CHARTPLOTTER
#411500-1

Additional Model Options	APEX 16 MEGA SI+ CHO (Control Head Only) #411500-1CHO
Interface	Multi-Gesture Touchscreen + Keypad Control
Display Size & Pixel Matrix	15.6" Diagonal 1920H x 1080V
Bluetooth	Built-In
Wi-Fi	Built-In
Water Surface Temp	Built-In Transducer
Speed	GPS Speed Included
Waterproof Class	IPX7
Mounting Options	Gimbal, Front In-Dash or Optional Rear In-Dash
Transducer Included	XM 14 HW MSI T (Transom Mount)
Power Input	10.8-20 VDC
Power Draw	4.3 Amps



APEX 13 MEGA SI+ CHARTPLOTTER
#411470-1

Additional Model Options	APEX 13 MEGA SI+ CHO (Control Head Only) #411470-1CHO
Interface	Multi-Gesture Touchscreen + Keypad Control
Display Size & Pixel Matrix	13.3" Diagonal 1920H x 1080V
Bluetooth	Built-In
Wi-Fi	Built-In
Water Surface Temp	Built-In Transducer
Speed	GPS Speed Included
Waterproof Class	IPX7
Mounting Options	Gimbal, Front In-Dash or Optional Rear In-Dash
Transducer Included	XM 14 HW MSI T (Transom Mount)
Power Input	10.8-20 VDC
Power Draw	3.1 Amps

SONAR CAPABILITIES

Sonar Types - Standard	MEGA Side Imaging+ MEGA Down Imaging+™ Dual Spectrum CHIRP
Sonar - Coverage	20°, 42°, 60°, (2) 86° & (2) 55° @ -10dB (Total of 180°)
Sonar - Frequencies Supported	50/83/200/455/800 kHz & 1.2 MHz
2D CHIRP - Frequencies Supported	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz) Optional Deepwater (28-250 kHz)*
CHIRP Imaging - Frequencies Supported	455 kHz SI (405-505 kHz) 455 kHz DI (435-535 kHz) 800 kHz SI (780-840 kHz) 800 kHz DI (800-860 kHz) MEGA SI+ (1050-1175 kHz) MEGA DI+ (1100-1200 kHz)
Target Separation	2.5" (63.5 mm)
Power Output (Max)	Port 1 (2D CHIRP, MDI, MSI, 360) / 1000 Watts (RMS)* Port 2 (2D CHIRP) / 2000 Watts (RMS)*
Depth - Sonar	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)
Range - Side Imaging (Side-To-Side)	800 ft (244 m) - 455 kHz 250 ft (76 m) - 800 kHz 500 ft (152 m) - MEGA+
Depth - Down Imaging	400 ft (122 m) - 455 kHz 125 ft (38 m) - 800 kHz 250 ft (76 m) - MEGA+

Sonar Types - Standard	MEGA Side Imaging+ MEGA Down Imaging+ Dual Spectrum CHIRP
Sonar - Coverage	20°, 42°, 60°, (2) 86° & (2) 55° @ -10dB (Total of 180°)
Sonar - Frequencies Supported	50/83/200/455/800 kHz & 1.2 MHz
2D CHIRP - Frequencies Supported	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz) Optional Deepwater (28-250 kHz)*
CHIRP Imaging - Frequencies Supported	455 kHz SI (405-505 kHz) 455 kHz DI (435-535 kHz) 800 kHz SI (780-840 kHz) 800 kHz DI (800-860 kHz) MEGA SI+ (1050-1175 kHz) MEGA DI+ (1100-1200 kHz)
Target Separation	2.5" (63.5 mm)
Power Output (Max)	Port 1 (2D CHIRP, MDI, MSI, 360) / 1000 Watts (RMS)* Port 2 (2D CHIRP) / 2000 Watts (RMS)*
Depth - Sonar	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)
Range - Side Imaging (Side-To-Side)	800 ft (244 m) - 455 kHz 250 ft (76 m) - 800 kHz 500 ft (152 m) - MEGA+
Depth - Down Imaging	400 ft (122 m) - 455 kHz 125 ft (38 m) - 800 kHz 250 ft (76 m) - MEGA+

Sonar Types - Standard	MEGA Side Imaging+ MEGA Down Imaging+ Dual Spectrum CHIRP
Sonar - Coverage	20°, 42°, 60°, (2) 86° & (2) 55° @ -10dB (Total of 180°)
Sonar - Frequencies Supported	50/83/200/455/800 kHz & 1.2 MHz
2D CHIRP - Frequencies Supported	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz) Optional Deepwater (28-250 kHz)*
CHIRP Imaging - Frequencies Supported	455 kHz SI (405-505 kHz) 455 kHz DI (435-535 kHz) 800 kHz SI (780-840 kHz) 800 kHz DI (800-860 kHz) MEGA SI+ (1050-1175 kHz) MEGA DI+ (1100-1200 kHz)
Target Separation	2.5" (63.5 mm)
Power Output (Max)	Port 1 (2D CHIRP, MDI, MSI, 360) / 1000 Watts (RMS)* Port 2 (2D CHIRP) / 2000 Watts (RMS)*
Depth - Sonar	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)
Range - Side Imaging (Side-To-Side)	800 ft (244 m) - 455 kHz 250 ft (76 m) - 800 kHz 500 ft (152 m) - MEGA+
Depth - Down Imaging	400 ft (122 m) - 455 kHz 125 ft (38 m) - 800 kHz 250 ft (76 m) - MEGA+

MAPPING AND GPS FEATURES (For available CoastMaster charts see pages 34-35)

GPS Receiver	Internal
Waypoints, Routes, Tracks/Points	10,000, 50, 50/20,000
Humminbird Basemap Built-In	●
Humminbird AutoChart Live	●

GPS Receiver	Internal
Waypoints, Routes, Tracks/Points	10,000, 50, 50/20,000
Humminbird Basemap Built-In	●
Humminbird AutoChart Live	●

GPS Receiver	Internal
Waypoints, Routes, Tracks/Points	10,000, 50, 50/20,000
Humminbird Basemap Built-In	●
Humminbird AutoChart Live	●

ACCESSORY OPTIONS

MEGA Live Imaging	○
MEGA 360 Imaging	○
CHIRP Radar	○
HDMI In/Out	○
Minn Kota Built-In MEGA Imaging	○
Minn Kota i-Pilot Link	○
Minn Kota Talon with Bluetooth	○
Cannon Optimum Downrigger	○

MEGA Live Imaging	○
MEGA 360 Imaging	○
CHIRP Radar	○
HDMI In/Out	○
Minn Kota Built-In MEGA Imaging	○
Minn Kota i-Pilot Link	○
Minn Kota Talon with Bluetooth	○
Cannon Optimum Downrigger	○

MEGA Live Imaging	○
MEGA 360 Imaging	○
CHIRP Radar	○
HDMI In/Out	○
Minn Kota Built-In MEGA Imaging	○
Minn Kota i-Pilot Link	○
Minn Kota Talon with Bluetooth	○
Cannon Optimum Downrigger	○

NETWORK OPTIONS

One-Boat Network Compatible	●
External GPS Receiver	○
AIS	○
VHF Radio	○
AutoPilot	○
5-Port Ethernet Switch	○
NMEA 2000	○

One-Boat Network Compatible	●
External GPS Receiver	○
AIS	○
VHF Radio	○
AutoPilot	○
5-Port Ethernet Switch	○
NMEA 2000	○

One-Boat Network Compatible	●
External GPS Receiver	○
AIS	○
VHF Radio	○
AutoPilot	○
5-Port Ethernet Switch	○
NMEA 2000	○

● Included ○ Optional — Not supported *Optional deepwater transducer required Features and specifications subject to change without notice.

SOLIX SERIES

15 / 12 / 10



SOLIX 15 MEGA SI+ GPS
#411570-1

Additional Model Options	SOLIX 15 MEGA SI+ GPS G3 CHO (Control Head Only) #411570-1CHO
Interface	Multi-Gesture Touchscreen + Keypad Control
Display Size & Pixel Matrix	15.4" Diagonal 1280H x 800V
Bluetooth	Built-In
Wi-Fi	Built-In
Water Surface Temp	Built-In Transducer
Speed	GPS Speed Included
Waterproof Class	IPX7
Mounting Options	Gimbal or Optional Rear In-Dash
Transducer Included	XM 14 HW MSI T (Transom Mount)
Power Input	10.8-20 VDC
Power Draw	2.8 Amps



SOLIX 12 MEGA SI+ GPS
#411550-1

Additional Model Options	SOLIX 12 MEGA SI+ GPS G3 CHO (Control Head Only) #411550-1CHO
Interface	Multi-Gesture Touchscreen + Keypad Control
Display Size & Pixel Matrix	12.1" Diagonal 1280H x 800V
Bluetooth	Built-In
Wi-Fi	Built-In
Water Surface Temp	Built-In Transducer
Speed	GPS Speed Included
Waterproof Class	IPX7
Mounting Options	Gimbal or Optional Rear In-Dash
Transducer Included	XM 14 HW MSI T (Transom Mount)
Power Input	10.8-20 VDC
Power Draw	2.7 Amps



SOLIX 10 MEGA SI+ GPS
#411530-1

Additional Model Options	SOLIX 10 MEGA SI+ GPS G3 CHO (Control Head Only) #411530-1CHO
Interface	Multi-Gesture Touchscreen + Keypad Control
Display Size & Pixel Matrix	10.1" Diagonal 1280H x 800V
Bluetooth	Built-In
Wi-Fi	Built-In
Water Surface Temp	Built-In Transducer
Speed	GPS Speed Included
Waterproof Class	IPX7
Mounting Options	Gimbal or Optional Rear In-Dash
Transducer Included	XM 14 HW MSI T (Transom Mount)
Power Input	10.8-20 VDC
Power Draw	2.5 Amps

SONAR CAPABILITIES

Sonar Types - Standard	MEGA Side Imaging+ MEGA Down Imaging+ Dual Spectrum CHIRP
Sonar - Coverage	20°, 42°, 60°, (2) 86° & (2) 55° @ -10dB (Total of 180°)
Sonar - Frequencies Supported	50/83/200/455/800 kHz & 1.2 MHz
2D CHIRP - Frequencies Supported	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz) Optional Deepwater (28-250 kHz)*
CHIRP Imaging - Frequencies Supported	455 kHz SI (405-505 kHz) 455 kHz DI (435-535 kHz) 800 kHz SI (780-840 kHz) 800 kHz DI (800-860 kHz) MEGA SI+ (1050-1175 kHz) MEGA DI+ (1100-1200 kHz)
Target Separation	2.5" (63.5 mm)
Power Output (Max)	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*
Depth - Sonar	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)
Range - Side Imaging (Side-To-Side)	800 ft (244 m) - 455 kHz 250 ft (76 m) - 800 kHz 500 ft (152 m) - MEGA+
Depth - Down Imaging	400 ft (122 m) - 455 kHz 125 ft (38 m) - 800 kHz 250 ft (76 m) - MEGA+

Sonar Types - Standard	MEGA Side Imaging+ MEGA Down Imaging+ Dual Spectrum CHIRP
Sonar - Coverage	20°, 42°, 60°, (2) 86° & (2) 55° @ -10dB (Total of 180°)
Sonar - Frequencies Supported	50/83/200/455/800 kHz & 1.2 MHz
2D CHIRP - Frequencies Supported	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz) Optional Deepwater (28-250 kHz)*
CHIRP Imaging - Frequencies Supported	455 kHz SI (405-505 kHz) 455 kHz DI (435-535 kHz) 800 kHz SI (780-840 kHz) 800 kHz DI (800-860 kHz) MEGA SI+ (1050-1175 kHz) MEGA DI+ (1100-1200 kHz)
Target Separation	2.5" (63.5 mm)
Power Output (Max)	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*
Depth - Sonar	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)
Range - Side Imaging (Side-To-Side)	800 ft (244 m) - 455 kHz 250 ft (76 m) - 800 kHz 500 ft (152 m) - MEGA+
Depth - Down Imaging	400 ft (122 m) - 455 kHz 125 ft (38 m) - 800 kHz 250 ft (76 m) - MEGA+

Sonar Types - Standard	MEGA Side Imaging+ MEGA Down Imaging+ Dual Spectrum CHIRP
Sonar - Coverage	20°, 42°, 60°, (2) 86° & (2) 55° @ -10dB (Total of 180°)
Sonar - Frequencies Supported	50/83/200/455/800 kHz & 1.2 MHz
2D CHIRP - Frequencies Supported	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz) Optional Deepwater (28-250 kHz)*
CHIRP Imaging - Frequencies Supported	455 kHz SI (405-505 kHz) 455 kHz DI (435-535 kHz) 800 kHz SI (780-840 kHz) 800 kHz DI (800-860 kHz) MEGA SI+ (1050-1175 kHz) MEGA DI+ (1100-1200 kHz)
Target Separation	2.5" (63.5 mm)
Power Output (Max)	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*
Depth - Sonar	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)
Range - Side Imaging (Side-To-Side)	800 ft (244 m) - 455 kHz 250 ft (76 m) - 800 kHz 500 ft (152 m) - MEGA+
Depth - Down Imaging	400 ft (122 m) - 455 kHz 125 ft (38 m) - 800 kHz 250 ft (76 m) - MEGA+

MAPPING AND GPS FEATURES (For available CoastMaster charts see pages 34-35)

GPS Receiver	Internal
Waypoints, Routes, Tracks/Points	10,000, 50, 50/20,000
Humminbird Basemap Built-In	●
Humminbird AutoChart Live	●

GPS Receiver	Internal
Waypoints, Routes, Tracks/Points	10,000, 50, 50/20,000
Humminbird Basemap Built-In	●
Humminbird AutoChart Live	●

GPS Receiver	Internal
Waypoints, Routes, Tracks/Points	10,000, 50, 50/20,000
Humminbird Basemap Built-In	●
Humminbird AutoChart Live	●

ACCESSORY OPTIONS

MEGA Live Imaging	○
MEGA 360 Imaging	○
CHIRP Radar	○
HDMI In/Out	—
Minn Kota Built-In MEGA Imaging	○
Minn Kota i-Pilot Link	○
Minn Kota Talon with Bluetooth	○
Cannon Optimum Downrigger	○

MEGA Live Imaging	○
MEGA 360 Imaging	○
CHIRP Radar	○
HDMI In/Out	—
Minn Kota Built-In MEGA Imaging	○
Minn Kota i-Pilot Link	○
Minn Kota Talon with Bluetooth	○
Cannon Optimum Downrigger	○

MEGA Live Imaging	○
MEGA 360 Imaging	○
CHIRP Radar	○
HDMI In/Out	—
Minn Kota Built-In MEGA Imaging	○
Minn Kota i-Pilot Link	○
Minn Kota Talon with Bluetooth	○
Cannon Optimum Downrigger	○

NETWORK OPTIONS

One-Boat Network Compatible	●
External GPS Receiver	○
AIS	○
VHF Radio	○
AutoPilot	○
5-Port Ethernet Switch	○
NMEA 2000 Direct Connections	○

One-Boat Network Compatible	●
External GPS Receiver	○
AIS	○
VHF Radio	○
AutoPilot	○
5-Port Ethernet Switch	○
NMEA 2000 Direct Connections	○

One-Boat Network Compatible	●
External GPS Receiver	○
AIS	○

HELIX SERIES

15 / 12



HELIX 15 MEGA SI+ GPS
G4N NETWORKING | #411320-1



HELIX 15 MEGA DI+ GPS CHO
G4N NETWORKING | #411310-1



HELIX 12 MEGA SI+ GPS
G4N NETWORKING | #411450-1



HELIX 12 MEGA DI+ GPS
G4N NETWORKING | #411440-1



HELIX 12 CHIRP-GPS
G4N NETWORKING | #411430-1

Additional Model Options	HELIX 15 MEGA SI+ GPS G4N CHO (Control Head Only) #411320-1CHO	—
Interface	Keypad Control (X-Press Menu™ System)	Keypad Control (X-Press Menu System)
Display Size & Pixel Matrix	15.4" Diagonal 1280H x 800V	15.4" Diagonal 1280H x 800V
Bluetooth	Built-In	Built-In
Wi-Fi	Built-In	Built-In
Water Surface Temp	Built-In Transducer	Built-In Transducer
Speed	GPS Speed Included	GPS Speed Included
Waterproof Class	IPX7	IPX7
Mounting Options	Gimbal or Optional Rear In-Dash	Gimbal or Optional Rear In-Dash
Transducer Included	XM 9 HW MSI T (Transom Mount)	Control Head Only – Transducer Not Included
Power Input	10.8-20 VDC	10.8-20 VDC
Power Draw	4.1 Amps	4.1 Amps

Additional Model Options	HELIX 12 MEGA SI+ GPS G4N CHO (Control Head Only) #411450-1CHO	HELIX 12 MEGA DI+ GPS G4N CHO (Control Head Only) #411440-1CHO	—
Interface	Keypad Control (X-Press Menu System)	Keypad Control (X-Press Menu System)	Keypad Control (X-Press Menu System)
Display Size & Pixel Matrix	12.1" Diagonal 1280H x 800V	12.1" Diagonal 1280H x 800V	12.1" Diagonal 1280H x 800V
Bluetooth	Built-In	Built-In	Built-In
Wi-Fi	Built-In	Built-In	Built-In
Water Surface Temp	Built-In Transducer	Built-In Transducer	Built-In Transducer
Speed	GPS Speed Included	GPS Speed Included	GPS Speed Included
Waterproof Class	IPX7	IPX7	IPX7
Mounting Options	Gimbal or Optional Rear In-Dash	Gimbal or Optional Rear In-Dash	Gimbal or Optional Rear In-Dash
Transducer Included	XM 9 HW MSI T (Transom Mount)	XM 9 HW MDI T (Transom Mount)	XNT 9 HW T (Transom Mount)
Power Input	10.8-20 VDC	10.8-20 VDC	10.8-20 VDC
Power Draw	3.2 Amps	3.2 Amps	3.2 Amps

SONAR CAPABILITIES

Sonar Types - Standard	MEGA Side Imaging+ MEGA Down Imaging+ Dual Spectrum CHIRP	MEGA Down Imaging+ Dual Spectrum CHIRP
Sonar - Coverage	20°, 42°, 60°, (2) 86° & (2) 55° @ -10dB (Total of 180°)	25°, 42°, 45°, 75° @ -10dB
Sonar - Frequencies Supported	50/83/200/455/800 kHz & 1.2 MHz	50/83/200/455/800 kHz & 1.2 MHz
2D CHIRP - Frequencies Supported	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz)	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz)
CHIRP Imaging - Frequencies Supported	455 kHz SI (405-505 kHz) 455 kHz DI (435-535 kHz) 800 kHz SI (780-840 kHz) 800 kHz DI (800-860 kHz) MEGA SI+ (1050-1175 kHz) MEGA DI+ (1100-1200 kHz)	455 kHz DI (435-535 kHz) 800 kHz DI (800-860 kHz) MEGA DI+ (1100-1200 kHz)
Target Separation	2.5" (63.5 mm)	2.5" (63.5 mm)
Power Output (Max)	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*
Depth - Sonar	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)
Range - Side Imaging (Side-To-Side)	800 ft (244 m) – 455 kHz 250 ft (76 m) – 800 kHz 400 ft (122 m) – MEGA+	—
Depth - Down Imaging	400 ft (122 m) – 455 kHz 125 ft (38 m) – 800 kHz 200 ft (61 m) – MEGA+	400 ft (122 m) – 455 kHz 125 ft (38 m) – 800 kHz 200 ft (61 m) – MEGA+

Sonar Types - Standard	MEGA Side Imaging+ MEGA Down Imaging+ Dual Spectrum CHIRP	MEGA Down Imaging+ Dual Spectrum CHIRP	Dual Spectrum CHIRP
Sonar - Coverage	20°, 42°, 60°, (2) 86° & (2) 55° @ -10dB (Total of 180°)	25°, 42°, 45°, 75° @ -10dB	20°, 42° & 60° @ -10dB
Sonar - Frequencies Supported	50/83/200/455/800 kHz & 1.2 MHz	50/83/200/455/800 kHz & 1.2 MHz	50/80/200 kHz
2D CHIRP - Frequencies Supported	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz)	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz)	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz)
CHIRP Imaging - Frequencies Supported	455 kHz SI (405-505 kHz) 455 kHz DI (435-535 kHz) 800 kHz SI (780-840 kHz) 800 kHz DI (800-860 kHz) MEGA SI+ (1050-1175 kHz) MEGA DI+ (1100-1200 kHz)	455 kHz DI (435-535 kHz) 800 kHz DI (800-860 kHz) MEGA DI+ (1100-1200 kHz)	—
Target Separation	2.5" (63.5 mm)	2.5" (63.5 mm)	2.5" (63.5 mm)
Power Output (Max)	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*
Depth - Sonar	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)
Range - Side Imaging (Side-To-Side)	800 ft (244 m) – 455 kHz 250 ft (76 m) – 800 kHz 400 ft (122 m) – MEGA+	—	—
Depth - Down Imaging	400 ft (122 m) – 455 kHz 125 ft (38 m) – 800 kHz 200 ft (61 m) – MEGA+	400 ft (122 m) – 455 kHz 125 ft (38 m) – 800 kHz 200 ft (61 m) – MEGA+	—

MAPPING AND GPS FEATURES (For available CoastMaster charts see pages 34-35)

GPS Receiver	Internal	Internal
Waypoints, Routes, Tracks/Points	2,500, 47, 50/20,000	2,500, 47, 50/20,000
Humminbird Basemap Built-In	●	●
Humminbird AutoChart Live (In Open Water Mode)	●	●
Humminbird AutoChart Live Ice (In Ice Fishing Mode)	—	—

GPS Receiver	Internal	Internal	Internal
Waypoints, Routes, Tracks/Points	2,500, 47, 50/20,000	2,500, 47, 50/20,000	2,500, 47, 50/20,000
Humminbird Basemap Built-In	●	●	●
Humminbird AutoChart Live (In Open Water Mode)	●	●	●
Humminbird AutoChart Live Ice (In Ice Fishing Mode)	—	—	—

ACCESSORY OPTIONS

MEGA Live Imaging	○	○
MEGA 360 Imaging	○	○
CHIRP Radar	○	○
HDMI In/Out	—	—
Minn Kota Built-In MEGA Imaging	○	○
Minn Kota i-Pilot Link	○	○
Minn Kota Talon with Bluetooth	○	○
Cannon Optimum Downrigger	○	○


MEGA Live Imaging	○	○	○
MEGA 360 Imaging	○	○	○
CHIRP Radar	○	○	○
HDMI In/Out	—	—	—
Minn Kota Built-In MEGA Imaging	○	○	○
Minn Kota i-Pilot Link	○	○	○
Minn Kota Talon with Bluetooth	○	○	○
Cannon Optimum Downrigger	○	○	○

NETWORK OPTIONS


One-Boat Network Compatible	●	●
External GPS Receiver	○	○
AIS	○	○
VHF Radio	○	○
AutoPilot	○	○
5-Port Ethernet Switch	○	○
NMEA 2000	○	○

One-Boat Network Compatible	●	●	●
External GPS Receiver	○	○	○
AIS	○	○	○
VHF Radio	○	○	○
AutoPilot	○	○	○
5-Port Ethernet Switch	○	○	○
NMEA 2000	○	○	○


● Included ○ Optional — Not supported *Optional deepwater transducer required Features and specifications subject to change without notice.

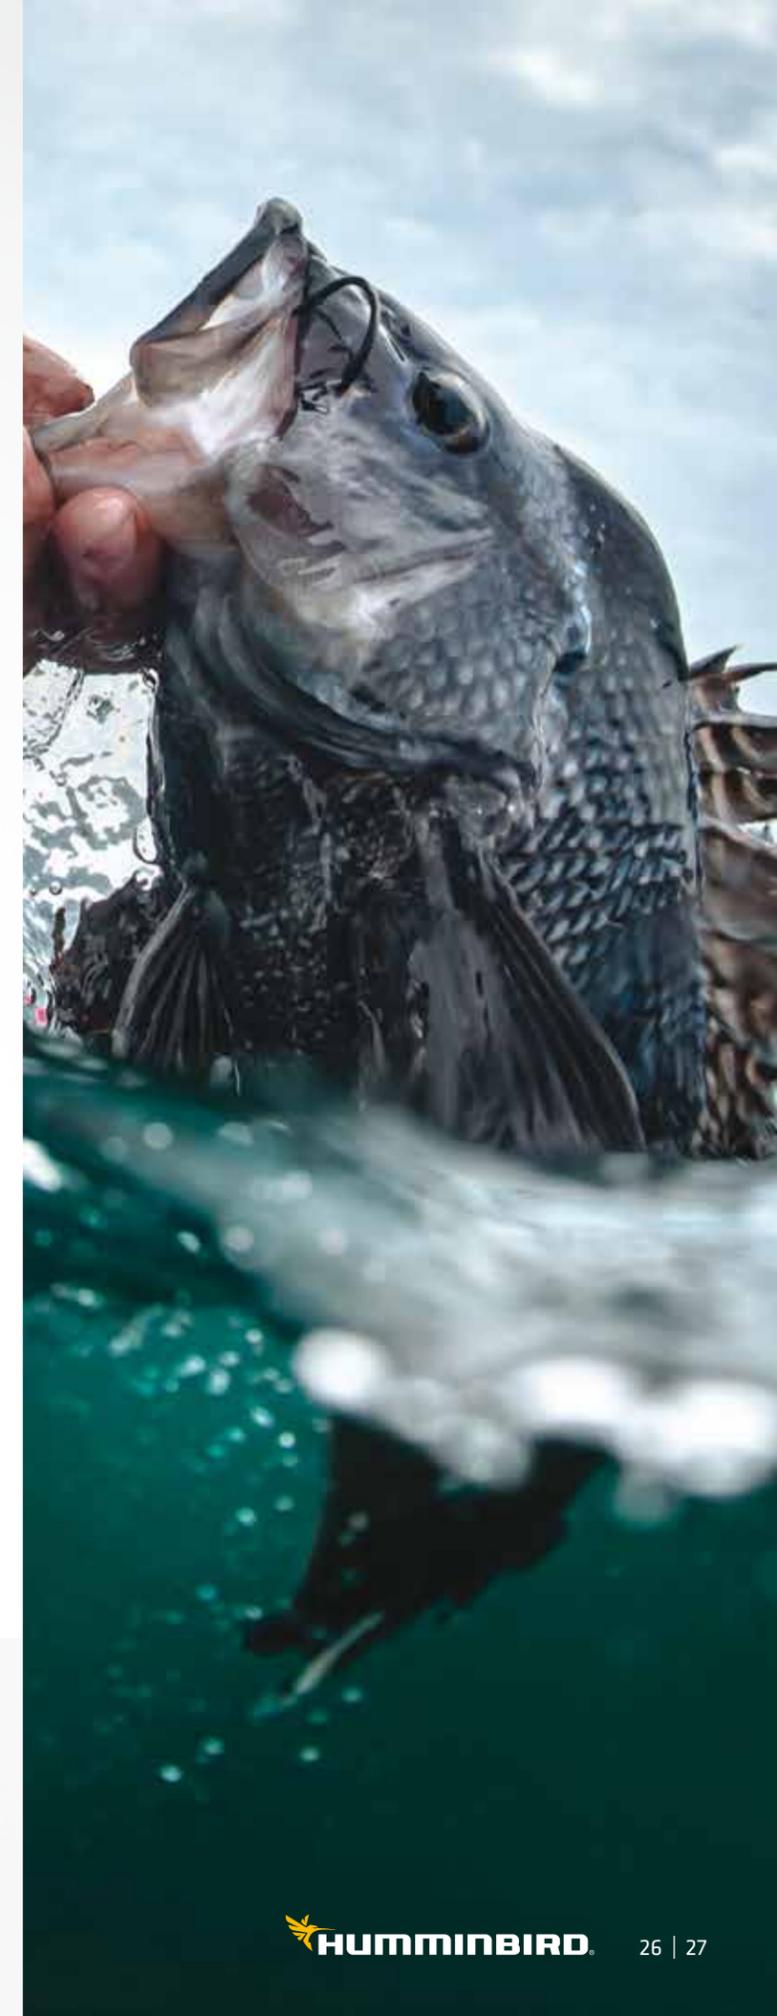

HELIX 15

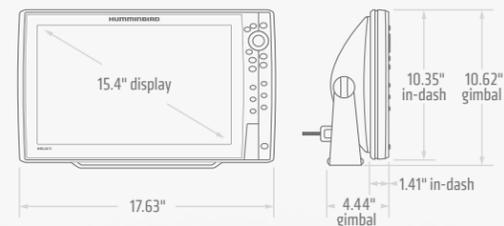

HELIX 12

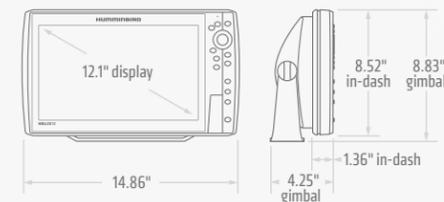

HELIX SERIES

10 / 9 / 8



HELIX 10 MEGA S1+ GPS
G4N NETWORKING | #411420-1



HELIX 10 MEGA DI+ GPS
G4N NETWORKING | #411410-1



HELIX 10 CHIRP-GPS
G4N NETWORKING | #411400-1



HELIX 9 MEGA S1+ GPS
G4N NETWORKING | #411380-1



HELIX 9 MEGA DI+ GPS
G4N NETWORKING | #411370-1



HELIX 9 CHIRP-GPS
G4N NETWORKING | #411360-1



HELIX 8 MEGA S1+ GPS
G4N NETWORKING | #411350-1



HELIX 8 MEGA DI+ GPS
G4N NETWORKING | #411340-1



HELIX 8 CHIRP-GPS
G4N NETWORKING | #411330-1

Additional Model Options	HELIX 10 MEGA S1+ GPS G4N CHO (Control Head Only) #411420-1CHO	HELIX 10 MEGA DI+ GPS G4N CHO (Control Head Only) #411410-1CHO	—
Interface	Keypad Control (X-Press Menu System)	Keypad Control (X-Press Menu System)	Keypad Control (X-Press Menu System)
Display Size & Pixel Matrix	10.1" Diagonal 1024H x 600V	10.1" Diagonal 1024H x 600V	10.1" Diagonal 1024H x 600V
Bluetooth	Built-In	Built-In	Built-In
Wi-Fi	Built-In	Built-In	Built-In
Water Surface Temp	Built-In Transducer	Built-In Transducer	Built-In Transducer
Speed	GPS Speed Included	GPS Speed Included	GPS Speed Included
Waterproof Class	IPX7	IPX7	IPX7
Mounting Options	Gimbal or Optional Rear In-Dash	Gimbal or Optional Rear In-Dash	Gimbal or Optional Rear In-Dash
Transducer Included	XM 9 HW MSI T (Transom Mount)	XM 9 HW MDI T	XNT 9 HW T (Transom Mount)
Power Input	10.8-20 VDC	10.8-20 VDC	10.8-20 VDC
Power Draw	2.7 Amps	2.7 Amps	2.7 Amps

Additional Model Options	HELIX 9 MEGA S1+ GPS G4N CHO (Control Head Only) #411380-1CHO	HELIX 9 MEGA DI+ GPS G4N CHO (Control Head Only) #411370-1CHO	—
Interface	Keypad Control (X-Press Menu System)	Keypad Control (X-Press Menu System)	Keypad Control (X-Press Menu System)
Display Size & Pixel Matrix	9" Diagonal 1024H x 600V	9" Diagonal 1024H x 600V	9" Diagonal 1024H x 600V
Bluetooth	Built-In	Built-In	Built-In
Wi-Fi	Built-In	Built-In	Built-In
Water Surface Temp	Built-In Transducer	Built-In Transducer	Built-In Transducer
Speed	GPS Speed Included	GPS Speed Included	GPS Speed Included
Waterproof Class	IPX7	IPX7	IPX7
Mounting Options	Gimbal or Optional Rear In-Dash	Gimbal or Optional Rear In-Dash	Gimbal or Optional Rear In-Dash
Transducer Included	XM 9 HW MSI T (Transom Mount)	XM 9 HW MDI T	XNT 9 HW T (Transom Mount)
Power Input	10.8-20 VDC	10.8-20 VDC	10.8-20 VDC
Power Draw	2.4 Amps	2.4 Amps	2.4 Amps

Additional Model Options	HELIX 8 MEGA S1+ GPS G4N CHO (Control Head Only) #411350-1CHO	HELIX 8 MEGA DI+ GPS G4N CHO (Control Head Only) #411340-1CHO	—
Interface	Keypad Control (X-Press Menu System)	Keypad Control (X-Press Menu System)	Keypad Control (X-Press Menu System)
Display Size & Pixel Matrix	8" Diagonal 1024H x 600V	8" Diagonal 1024H x 600V	8" Diagonal 1024H x 600V
Bluetooth	Built-In	Built-In	Built-In
Wi-Fi	Built-In	Built-In	Built-In
Water Surface Temp	Built-In Transducer	Built-In Transducer	Built-In Transducer
Speed	GPS Speed Included	GPS Speed Included	GPS Speed Included
Waterproof Class	IPX7	IPX7	IPX7
Mounting Options	Gimbal or Optional Rear In-Dash	Gimbal or Optional Rear In-Dash	Gimbal or Optional Rear In-Dash
Transducer Included	XM 9 HW MSI T (Transom Mount)	XNT 9 HW MDI 75 T (Transom Mount)	XNT 9 HW T (Transom Mount)
Power Input	10.8-20 VDC	10.8-20 VDC	10.8-20 VDC
Power Draw	2.4 Amps	2.4 Amps	2.4 Amps

SONAR CAPABILITIES

Sonar Types - Standard	MEGA Side Imaging+ MEGA Down Imaging+ Dual Spectrum CHIRP	MEGA Down Imaging+ Dual Spectrum CHIRP	Dual Spectrum CHIRP
Sonar - Coverage	20°, 42°, 60°, (2) 86° & (2) 55° @ -10dB (Total of 180°)	25°, 42°, 45°, 75° @ -10dB	20°, 42° & 60° @ -10dB
Sonar - Frequencies Supported	50/83/200/455/800 kHz & 1.2 MHz	50/83/200/455/800 kHz & 1.2 MHz	50/80/200 kHz
2D CHIRP - Frequencies Supported	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz)	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz)	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz)
CHIRP Imaging - Frequencies Supported	455 kHz SI (405-505 kHz) 455 kHz DI (435-535 kHz) 800 kHz SI (780-840 kHz) 800 kHz DI (800-860 kHz) MEGA S1+ (1050-1175 kHz) MEGA DI+ (1100-1200 kHz)	455 kHz DI (435-535 kHz) 800 kHz DI (800-860 kHz) MEGA DI+ (1100-1200 kHz)	—
Target Separation	2.5" (63.5 mm)	2.5" (63.5 mm)	2.5" (63.5 mm)
Power Output (Max)	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*
Depth - Sonar	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)
Range - Side Imaging (Side-to-Side)	800 ft (244 m) - 455 kHz 250 ft (76 m) - 800 kHz 400 ft (122 m) - MEGA+	—	—
Depth - Down Imaging	400 ft (122 m) - 455 kHz 125 ft (38 m) - 800 kHz 200 ft (61 m) - MEGA+	400 ft (122 m) - 455 kHz 125 ft (38 m) - 800 kHz 200 ft (61 m) - MEGA+	—

Sonar Types - Standard	MEGA Side Imaging+ MEGA Down Imaging+ Dual Spectrum CHIRP	MEGA Down Imaging+ Dual Spectrum CHIRP	Dual Spectrum CHIRP
Sonar - Coverage	20°, 42°, 60°, (2) 86° & (2) 55° @ -10dB (Total of 180°)	25°, 42°, 45°, 75° @ -10dB	20°, 42° & 60° @ -10dB
Sonar - Frequencies Supported	50/83/200/455/800 kHz & 1.2 MHz	50/83/200/455/800 kHz & 1.2 MHz	50/80/200 kHz
2D CHIRP - Frequencies Supported	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz)	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz)	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz)
CHIRP Imaging - Frequencies Supported	455 kHz SI (405-505 kHz) 455 kHz DI (435-535 kHz) 800 kHz SI (780-840 kHz) 800 kHz DI (800-860 kHz) MEGA S1+ (1050-1175 kHz) MEGA DI+ (1100-1200 kHz)	455 kHz DI (435-535 kHz) 800 kHz DI (800-860 kHz) MEGA DI+ (1100-1200 kHz)	—
Target Separation	2.5" (63.5 mm)	2.5" (63.5 mm)	2.5" (63.5 mm)
Power Output (Max)	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*
Depth - Sonar	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)
Range - Side Imaging (Side-to-Side)	800 ft (244 m) - 455 kHz 250 ft (76 m) - 800 kHz 400 ft (122 m) - MEGA+	—	—
Depth - Down Imaging	400 ft (122 m) - 455 kHz 125 ft (38 m) - 800 kHz 200 ft (61 m) - MEGA+	400 ft (122 m) - 455 kHz 125 ft (38 m) - 800 kHz 200 ft (61 m) - MEGA+	—

Sonar Types - Standard	MEGA Side Imaging+ MEGA Down Imaging+ Dual Spectrum CHIRP	MEGA Down Imaging+ Dual Spectrum CHIRP	Dual Spectrum CHIRP
Sonar - Coverage	20°, 42°, 60°, (2) 86° & (2) 55° @ -10dB (Total of 180°)	25°, 42°, 45°, 75° @ -10dB	20°, 42° & 60° @ -10dB
Sonar - Frequencies Supported	50/83/200/455/800 kHz & 1.2 MHz	50/83/200/455/800 kHz & 1.2 MHz	50/80/200 kHz
2D CHIRP - Frequencies Supported	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz)	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz)	Full Mode (150-200 kHz) Narrow Mode (140-200 kHz) Wide Mode (180-240 kHz)
CHIRP Imaging - Frequencies Supported	455 kHz SI (405-505 kHz) 455 kHz DI (435-535 kHz) 800 kHz SI (780-840 kHz) 800 kHz DI (800-860 kHz) MEGA S1+ (1050-1175 kHz) MEGA DI+ (1100-1200 kHz)	455 kHz (440-500 kHz) 800 kHz (800-860 kHz) MEGA DI (1075-1150 kHz)	—
Target Separation	2.5" (63.5 mm)	2.5" (63.5 mm)	2.5" (63.5 mm)
Power Output (Max)	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*	1000 Watts (RMS)*; 8000 Watts (Peak-to-Peak)*
Depth - Sonar	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)
Range - Side Imaging (Side-to-Side)	800 ft (244 m) - 455 kHz 250 ft (76 m) - 800 kHz 400 ft (122 m) - MEGA+	—	800 ft (244 m) - 455 kHz 250 ft (76 m) - 800 kHz 400 ft (122 m) - MEGA+
Depth - Down Imaging	400 ft (122 m) - 455 kHz 125 ft (38 m) - 800 kHz 200 ft (61 m) - MEGA+	400 ft (122 m) - 455 kHz 125 ft (38 m) - 800 kHz 200 ft (61 m) - MEGA+	400 ft (122 m) - 455 kHz 125 ft (38 m) - 800 kHz 200 ft (61 m) - MEGA+

MAPPING AND GPS FEATURES (For available CoastMaster charts see pages 34-35)

GPS Receiver	Internal	Internal	Internal
Waypoints, Routes, Tracks/Points	2,500, 47, 50/20,000	2,500, 47, 50/20,000	2,500, 47, 50/20,000
Humminbird Basemap Built-In	●	●	●
Humminbird AutoChart Live (In Open Water Mode)	●	●	●
Humminbird AutoChart Live Ice (In Ice Fishing Mode)	●	●	●

GPS Receiver	Internal	Internal	Internal
Waypoints, Routes, Tracks/Points	2,500, 47, 50/20,000	2,500, 47, 50/20,000	2,500, 47, 50/20,000
Humminbird Basemap Built-In	●	●	●
Humminbird AutoChart Live (In Open Water Mode)	●	●	●
Humminbird AutoChart Live Ice (In Ice Fishing Mode)	●	●	●

GPS Receiver	Internal	Internal	Internal
Waypoints, Routes, Tracks/Points	2,500, 47, 50/20,000	2,500, 47, 50/20,000	2,500, 47, 50/20,000
Humminbird Basemap Built-In	●	●	●
Humminbird AutoChart Live (In Open Water Mode)	●	●	●
Humminbird AutoChart Live Ice (In Ice Fishing Mode)	●	●	●

ACCESSORY OPTIONS

MEGA Live Imaging	○	○	○
MEGA 360 Imaging	○	○	○
CHIRP Radar	○	○	○
HDMI In/Out	—	—	—
Minn Kota Built-In MEGA Imaging	○	○	○
Minn Kota i-Pilot Link	○	○	○
Minn Kota Talon with Bluetooth	○	○	○
Cannon Optimum Downrigger	○	○	○

MEGA Live Imaging	○	○	—
MEGA 360 Imaging	○	○	—
CHIRP Radar	○	○	○
HDMI In/Out	—	—	—
Minn Kota Built-In MEGA Imaging	○	○	○
Minn Kota i-Pilot Link	○	○	○
Minn Kota Talon with Bluetooth	○	○	○
Cannon Optimum Downrigger	○	○	○

MEGA Live Imaging	○	○	—
MEGA 360 Imaging	○	○	—
CHIRP Radar	○	○	○
HDMI In/Out	—	—	—
Minn Kota Built-In MEGA Imaging	○	○	○
Minn Kota i-Pilot Link	○	○	○
Minn Kota Talon with Bluetooth	○	○	○
Cannon Optimum Downrigger	○	○	○

NETWORK OPTIONS


One-Boat Network Compatible	●	●	●
External GPS Receiver	○	○	○
AIS	○	○	○
VHF Radio	○	○	○
AutoPilot	○	○	○
5-Port Ethernet Switch	○	○	○
NMEA 2000	○	○	○

One-Boat Network Compatible	●	●	●
External GPS Receiver	○	○	○
AIS	○	○	○
VHF Radio	○	○	○
AutoPilot	○	○	○
5-Port Ethernet Switch	○	○	○
NMEA 2000	○	○	○


One-Boat Network Compatible	●	●	●
External GPS Receiver	○	○	○
AIS	○	○	○
VHF Radio	○	○	○
AutoPilot	○	○	○
5-Port Ethernet Switch	○	○	○
NMEA 2000	○	○	○

● Included ○ Optional — Not supported *Optional deepwater transducer required Features and specifications subject to change without notice.


HELIX 10

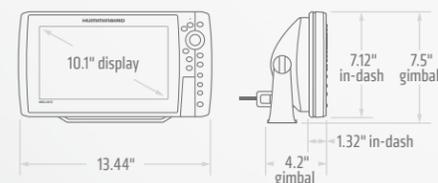

HELIX 9

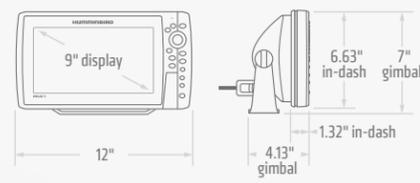


HELIX 8

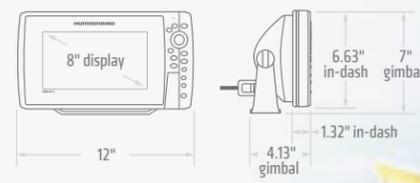

HELIX SERIES

7 / 5



Additional Model Options	—	HELIX 7 MEGA DI-GPS G3N CHO (Control Head Only) #411070-1CHO	HELIX 7 CHIRP-GPS G3N AS (All Season) #411210-1	—	—	—
Interface	Keypad Control (X-Press Menu System)	Keypad Control (X-Press Menu System)	Keypad Control (X-Press Menu System)	Keypad Control (X-Press Menu System)	Keypad Control (X-Press Menu System)	Keypad Control (X-Press Menu System)
Display Size & Pixel Matrix	7" Diagonal 800H x 480V	7" Diagonal 800H x 480V	7" Diagonal 800H x 480V	7" Diagonal 800H x 480V	7" Diagonal 800H x 480V	7" Diagonal 800H x 480V
Bluetooth	Built-In	Built-In	Built-In	Built-In	Built-In	Built-In
Wi-Fi	—	—	—	—	—	—
Water Surface Temp	Built-In Transducer	Built-In Transducer	Built-In Transducer	Built-In Transducer	Built-In Transducer	Built-In Transducer
Speed	GPS Speed Included	GPS Speed Included	GPS Speed Included	GPS Speed Included	GPS Speed Included	GPS Speed Included
Waterproof Class	IPX7	IPX7	IPX7	IPX7	IPX7	IPX7
Mounting Options	Gimbal or Optional Rear In-Dash	Gimbal or Optional Rear In-Dash	Gimbal or Optional Rear In-Dash	Gimbal or Optional Rear In-Dash	Gimbal or Optional Rear In-Dash	Gimbal or Optional Rear In-Dash
Transducer Included	XNT 9 HW MSI 150 T (Transom Mount)	XNT 9 HW MDI 75 T (Transom Mount)	XNT 9 HW T (Transom Mount)	XNT 9 HW MSI 150 T (Transom Mount)	XNT 9 HW MDI 75 T (Transom Mount)	XNT 9 HW T (Transom Mount)
Power Input	10.8-20 VDC	10.8-20 VDC	10.8-20 VDC	10.8-20 VDC	10.8-20 VDC	10.8-20 VDC
Power Draw	800 mA	800 mA	800 mA	800 mA	800 mA	800 mA

SONAR CAPABILITIES

Sonar Types - Standard	MEGA Side Imaging MEGA Down Imaging Dual Spectrum CHIRP	MEGA Down Imaging Dual Spectrum CHIRP	Dual Spectrum CHIRP	MEGA Side Imaging MEGA Down Imaging Dual Spectrum CHIRP	MEGA Down Imaging Dual Spectrum CHIRP	Dual Spectrum CHIRP
Sonar - Coverage	20°, 42°, 60° & (2) 86° @ -10dB (Total of 180°)	16°, 42°, 28°, 45° & 75° @ -10dB	20°, 42° & 60° @ -10dB	20°, 42°, 60° & (2) 86° @ -10dB (Total of 180°)	16°, 28°, 42°, 45° & 75° @ -10dB	20°, 42° & 60° @ -10dB
Sonar - Frequencies Supported	50/83/200/455 kHz	50/83/200/455 kHz	50/83/200 kHz	50/83/200/455 kHz	50/83/200/455 kHz	50/83/200 kHz
2D CHIRP - Frequencies Supported	Full Mode (150-220 kHz) Narrow Mode (180-240 kHz) Wide Mode (140-200 kHz)	Full Mode (150-220 kHz) Narrow Mode (180-240 kHz) Wide Mode (140-200 kHz)	Full Mode (150-220 kHz) Narrow Mode (180-240 kHz) Wide Mode (140-200 kHz)	Full Mode (150-220 kHz) Narrow Mode (180-240 kHz) Wide Mode (140-200 kHz)	Full Mode (150-220 kHz) Narrow Mode (180-240 kHz) Wide Mode (140-200 kHz)	Full Mode (150-220 kHz) Narrow Mode (180-240 kHz) Wide Mode (140-200 kHz)
CHIRP Imaging - Frequencies Supported	455 kHz (440-500 kHz) MEGA SI (1075-1150 kHz) MEGA DI (1075-1150 kHz)	455 kHz (440-500 kHz) MEGA DI (1075-1150 kHz)	—	455 kHz (440-500 kHz) MEGA SI (1075-1150 kHz) MEGA DI (1075-1150 kHz)	455 kHz (440-500 kHz) MEGA DI (1075-1150 kHz)	—
Target Separation	2.5" (63.5 mm)					
Power Output (Max)	500 Watts (RMS); 4000 Watts (Peak-to-Peak)					
Depth - Sonar	1200 ft (Standard Transducer) 3500 ft (Optional Transducer)					
Range - Side Imaging (Side-to-Side)	480 ft (146 m) - 455 kHz 150 ft (46 m) - MEGA	—	—	480 ft (146 m) - 455 kHz 150 ft (46 m) - MEGA	—	—
Depth - Down Imaging	480 ft (146 m) - 455 kHz 75 ft (23 m) - MEGA	350 ft (107 m) - 455 kHz 125 ft (38 m) - MEGA	—	480 ft (146 m) - 455 kHz 150 ft (46 m) - MEGA	350 ft (107 m) - 455 kHz 125 ft (38 m) - MEGA	—

MAPPING AND GPS FEATURES (For available CoastMaster charts see pages 34-35)

GPS Receiver	Internal	Internal	Internal	Internal	Internal	Internal
Waypoints, Routes, Tracks/Points	2,750, 45, 50/20,000	2,750, 45, 50/20,000	2,750, 45, 50/20,000	2,750, 45, 50/20,000	2,750, 45, 50/20,000	2,750, 45, 50/20,000
Humminbird Basemap Built-In	●	●	●	●	●	●
Humminbird AutoChart Live (In Open Water Mode)	●	●	●	●	●	●
Humminbird AutoChart Live Ice (In Ice Fishing Mode)	●	●	●	●	●	●

ACCESSORY OPTIONS

MEGA Live Imaging	—	—	—	—	—	—
MEGA 360 Imaging	—	—	—	—	—	—
CHIRP Radar	○	○	○	—	—	—
HDMI In/Out	—	—	—	—	—	—
Minn Kota Built-In MEGA Imaging	○	○	—	○	○	—
Minn Kota i-Pilot Link	○	○	○	—	—	—
Minn Kota Talon with Bluetooth	○	○	○	—	—	—
Cannon Optimum Downrigger	—	—	—	—	—	—

NETWORK OPTIONS

One-Boat Network Compatible	●	●	●	—	—	—
External GPS Receiver	○	○	○	○	○	○
AIS	○	○	○	○	○	○
VHF Radio	○	○	○	—	—	—
AutoPilot	○	○	○	○	○	○
5-Port Ethernet Switch	○	○	○	—	—	—
NMEA 2000	○	○	○	—	—	—

● Included ○ Optional — Not supported Features and specifications subject to change without notice.



Keypad Control (X-Press Menu System)				
5" Diagonal 800H x 480V				
Built-In Transducer				
GPS Speed Included	GPS Speed Included	GPS Speed Included	Optional	Optional
IPX7	IPX7	IPX7	IPX7	IPX7
Gimbal or Optional Rear In-Dash				
XNT 9 SI 180 T (Transom Mount)	XNT 9 DI T (Transom Mount)	XNT 9 20 T (Transom Mount)	XNT 9 DI T (Transom Mount)	XNT 9 20 T (Transom Mount)
10.82 VDC	10.82 VDC	10.8-20 VDC	10.8-20 VDC	10.8-20 VDC
615 mA	615 mA	615 mA	650 mA	650 mA

CHIRP Side Imaging CHIRP Down Imaging CHIRP Digital Sonar DualBeam PLUS	CHIRP Down Imaging CHIRP Digital Sonar DualBeam PLUS	CHIRP Digital Sonar DualBeam PLUS	Down Imaging Sonar DualBeam PLUS	DualBeam PLUS
20°, 60° & (2) 86° @ -10dB (Total of 180°)	16°, 28°, 45° & 75° @ -10dB	20° & 60° @ -10dB	16°, 28°, 45° & 75° @ -10dB	20° & 60° @ -10dB
50/83/200/455 kHz	50/83/200/455/800 kHz	50/83/200 kHz	200/455/800 kHz	83/200 kHz
83/200 (75-155/130-250 kHz) 50/200 (28-75/130-250 kHz) Low (28-75 kHz) Med (75-155 kHz) High (130-250 kHz)	83/200 (75-155/130-250 kHz) 50/200 (28-75/130-250 kHz) Low (28-75 kHz) Med (75-155 kHz) High (130-250 kHz)	83/200 (75-155/130-250 kHz) 50/200 (28-75/130-250 kHz) Low (28-75 kHz) Med (75-155 kHz) High (130-250 kHz)	—	—
455 kHz (420-520 kHz)	455 kHz (420-520 kHz) 800 kHz (790-850 kHz)	—	—	—
2.5" (63.5 mm)	2.5" (63.5 mm)	2.5" (63.5 mm)	2.5" (63.5 mm)	2.5" (63.5 mm)
500 Watts (RMS); 4000 Watts (Peak-to-Peak)	500 Watts (RMS); 4000 Watts (Peak-to-Peak)	500 Watts (RMS); 4000 Watts (Peak-to-Peak)	500 Watts (RMS); 4000 Watts (Peak-to-Peak)	500 Watts (RMS); 4000 Watts (Peak-to-Peak)
1500 ft (Standard Transducer) 2500 ft (Optional Transducer)	600 ft (Standard Transducer) 2500 ft (Optional Transducer)	1500 ft (Standard Transducer) 2500 ft (Optional Transducer)	600 ft (Standard Transducer)	1500 ft (Standard Transducer)
250 ft (76 m) - 455 kHz	—	—	—	—
350 ft (107 m) - 455 kHz	350 ft (107 m) - 455 kHz 350 ft (107 m) - 800 kHz	—	350 ft (107 m) - 455 kHz 350 ft (107 m) - 800 kHz	—

Internal	Internal	Internal	○	○
2,500, 45, 50/20,000	2,500, 45, 50/20,000	2,500, 45, 50/20,000	—	—
●	●	●	—	—
●	●	●	—	—
●	●	●	—	—

—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—

—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—
—	—	—	—	—

HELIX 7



HELIX 5






ACCESSORIES

- 34 | CoastMaster
- 36 | MEGA Live Imaging
MEGA 360 Imaging Transducers
- 37 | CHIRP Radar
NMEA 2000
- 38 | Transducer Hardware
- 40 | Ethernet Networking
Power Cables
External GPS Modules
- 41 | AutoPilot
Fish Finder Mounting Hardware
Fish Finder Covers/Cases
- 42 | Boat Rigging Guide

NEW

HUMMINBIRD


COASTMASTER

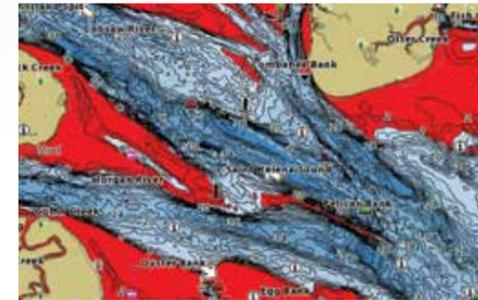

SHALLOW WATER AND DEPTH HIGHLIGHT
Navigate safely and quickly identify spots where fish are hiding with red shading highlights for shallow water areas on an adjustable range from zero to 30 feet. Create up to four user-defined depth highlight ranges, so you can easily target productive water.



WATER LEVEL OFFSET
Synchronize the depth contours and shorelines of your CoastMaster charts with the actual water levels, so your chart will reflect the current water level of your fishing spots.

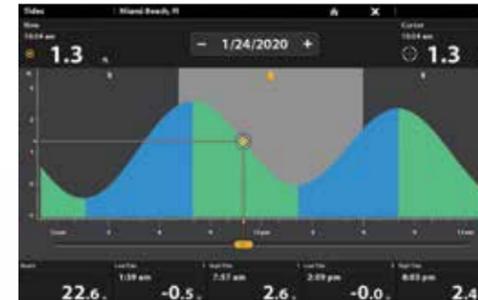

TIDES & CURRENTS
Whichever way the tide rolls, make sure it's in your favor. CoastMaster's predictive software allows you to plan your fishing day with tidal direction and height, as well as the speed and direction of currents and more, so you'll never be caught guessing.



CHART VIEWS
See the water your way with three view presets. Customize each desired preset and easily switch from Fishing, Navigation and User modes to show only the details you want and need on screen for your fishing preferences.



VX TECHNOLOGY
Don't delay. Vector-accelerated technology provides five customizable color palettes and fast map load times, so you can seize every moment on the water.

THE COAST IS NOW ABSOLUTELY CLEAR.

Find the path to your next big catch with the incredible accuracy and detail of Humminbird CoastMaster. With easy-to-read contours and chart customization, you'll be able to identify the spots you know will hold fish and navigate there safely. Building on the latest data available, CoastMaster delivers unrivaled nearshore and offshore angling performance. You'll also have access to more fish-catching features thanks to compatibility with the One-Boat Network from Humminbird and Minn Kota.



COASTMASTER U.S. COASTAL Vx #601015-1



NEW

MEGA LIVE IMAGING

Bring the must-watch detail and non-stop action of MEGA Live Imaging to a fish finder near you. MEGA Live is compatible with all APEX, SOLIX and select HELIX Series models. Upgrading is as simple as connecting the Ethernet cable to your head unit and attaching the three-position MEGA Live transducer to your trolling motor.

Compatible Models

- APEX (all models)
- SOLIX (all models)
- HELIX 8-15 G3N/G4N models with MEGA Imaging



#710304-1

MEGA 360 IMAGING

Upgrading to incredible 360-degree views is as simple as adding the MEGA 360 Imaging transducer to your Minn Kota trolling motor and connecting to your Humminbird fish finder with MEGA Imaging+. The Ultrex™ MEGA 360 Imaging transducer is designed to mount to the Minn Kota Ultrex for uninterrupted use, even when in Spot-Lock mode. The Fortrex® MEGA 360 Imaging transducer is compatible with both Minn Kota Fortrex and Maxxum® trolling motors. Additional models include Universal and No Mount options, meaning that no matter your boat, there is a MEGA 360 Imaging for you to find more fish.

Compatible Models

- APEX (all models)
- SOLIX (all models)
- HELIX 8-15 G3N/G4N models with MEGA Imaging+

Some rigging configurations will require additional accessories, please see page 56 for more details.



ULTREX MEGA 360

#411250-1

FORTREX MEGA 360

#411260-1

MEGA 360 - UNIVERSAL

#411390-1

MEGA 360 - NO MOUNT

#411580-1


CHIRP RADAR

Introducing the next generation of marine radar: CHIRP Radar, featuring CHIRP Pulse Compression. Setting a new standard for compact solid state radar, this technology delivers superior target separation on both long and extremely short ranges. This translates to better situational awareness in low-visibility conditions and helps identify birds and floating obstacles for clues to where game fish are located. You can also track weather and vessels with amazing definition. Available for select Humminbird models with Ethernet-networking capabilities.

HB 2124 CHIRP RADAR
#750013-1

Some compatible Humminbird models require additional adapter, listed below.

Models	Cables Required
APEX and SOLIX Series	Built-in
HELIX G2N/G3N/G4N Series	AS EC ODE (#720074-1)

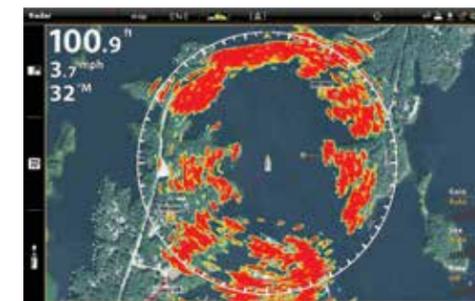

Clearly identify this upcoming bridge with the precise imaging of Humminbird CHIRP Radar.

SOLID STATE PERFORMANCE

Thanks to solid state technology, Humminbird radar is safe, reliable and lightweight. At 12.3 lbs, the radar unit weighs 50% less than traditional magnetron radars and offers safe emissions with a low power radar transmitter. It's also ready to use in seconds, without a lengthy warm-up period.

CHIRP PULSE COMPRESSION

Along with excellent short-range detection (18 ft minimum range), CHIRP Pulse Compression ensures more energy reaches each target for superior imaging at long ranges up to 24 nautical miles. CHIRP Pulse Compression identifies small or weak targets, even while positioned close to strong returns.

SUPERIOR RADAR IMAGING

See things more clearly with Humminbird CHIRP Radar. Shorelines, buoys, other boats and weather—watch it all take shape on your display for maximum safety and a competitive edge. Available for all networking models, advanced target separation displays targets with unsurpassed resolution and quality.

SPECIFICATIONS

Antenna Dimension	21" Enclosed Dome
Antenna Type	Patch Array
Peak Power Output	20W
Transmit Frequency	9354 to 9446 MHz
Beamwidth (nominal)	4.9° Horizontal and 20° Vertical
Input Voltage	12 or 24 VDC (Min: 10.8V, Max: 31.2V)
Networking	Ethernet
Max. Range Scale	1/16" to 24 nautical miles
Power Consumption	Transmit Mode 17W; Standby Mode 7W
Duplexer	Circulator
Pulse Widths (3dB)	40 ns to 14.7 µs
CHIRP Lengths	400 ns to 20 µs
CHIRP Bandwidth	Up to 32 MHz
IF Bandwidth	26 MHz
Noise	Less than 4dB
Polarization	Horizontal
Weight	5.6 kg (12.3 lb)
Waterproofing	IPX6



NMEA 2000

Boat performance, weather or water conditions, make sense of it all with NMEA 2000 networking on your Humminbird fish finder. Display and easily interpret virtually any NMEA 2000 sensor with intuitive, high-color graphics and text. You can even view data for multiple engines and fuel tanks. Easily customize data boxes to suit your needs. Focus on a single reading or view multiple gauges at once for a more complete picture. Plug your NMEA 2000 network cable directly into all APEX, SOLIX and HELIX G4N models. For non-G4N HELIX Series models, a waterproof black-box solution (AS NMEA2K) is available.



HB N2K SINGLE STARTER KIT M
#700064-1

HB N2K DUAL STARTER KIT M (shown)
#700065-1



Drop Cables and Connectors

HB N2K Drop Cable 0.5M M	#720117-2
HB N2K Drop Cable 2M M	#720117-2 (shown)
HB N2K Drop Cable 5M M	#720117-3
HB N2K Drop Cable 10M M	#720117-4
HB N2K Power T M	#760037-1
HB N2K T-Connector M	#760038-1
HB N2K Terminator Female M	#700035-1
HB N2K Terminator Male M	#700036-1



Cables

AS OD NMEA 2000 (needed to adapt NMEA 2000 drop cable into quick-disconnect cable for HELIX G4N models)	#720114-1
AS NMEA (APEX adapter cable for NMEA 0183 accessory)	#720116-1 (shown)



ETHERNET NETWORKING

ETHERNET CABLES

Quickly set up an Ethernet connection between two Humminbird Ethernet-capable units. Available in five lengths—you select the length you need.

AS EC 5E (5 FT)
#720073-6

AS EC 10E (10 FT)
#720073-2

AS EC 15E (15 FT)
#720073-5

AS EC 20E (20 FT)
#720073-3

AS EC 30E (30 FT)
#720073-4



ETHERNET ADAPTER CABLE

Allows Ethernet connection to HELIX 15/12/10/9/8/7, Ethernet-ready select 800/900/1100 Series and 700 HD Series units. Cable is 12-inches long.

AS EC QDE (12 IN)
#720074-1



ETHERNET EXTENSION CABLE

Easily extend the reach of your Ethernet connection with this 30-foot cable.

AS ECX 30E (30 FT)
#760025-1



CONNECTION CHART

STEP 1

Find the group numbers for the two models you plan to network

GROUP 1	GROUP 2	GROUP 3	
APEX Series SOLIX Series	HELIX 15 Series HELIX 12 Series HELIX 10 Series HELIX 9 Series HELIX 8 Series HELIX 7 G2N and G3N Series	1199ci HD 1159ci HD DI 1159ci HD 999ci HD 959ci HD DI	959ci HD 899ci HD 859ci HD DI 859ci HD

STEP 2

Cross reference the group numbers to find the required cables to network your models

FIRST MODEL TO NETWORK	SECOND MODEL TO NETWORK		
	1	2	3
1	Ethernet Cable	Ethernet Cable plus (1) AS EC QDE	Ethernet Cable plus (1) AS EC QDE
2	Ethernet Cable plus (1) AS EC QDE	Ethernet Cable plus (2) AS EC QDE	Ethernet Cable plus (2) AS EC QDE
3	Ethernet Cable plus (1) AS EC QDE	Ethernet Cable plus (2) AS EC QDE	Ethernet Cable plus (2) AS EC QDE

DUAL HELIX STARTER KITS

Bring it all together with these quick and easy kits. Everything you need to network two Ethernet-equipped HELIX models on your fiberglass or aluminum boat is in each kit. Connect the included in-hull or transom mount Dual Spectrum CHIRP transducer to an existing Side/Down Imaging transducer using the enclosed splitter cable. Also included is an adapter cable to connect compatible HELIX 8, 9, 10, 12, 15 MEGA Imaging units to select Minn Kota motors with built-in MEGA Down Imaging.

DUAL HELIX STARTER KIT
HWAL MI - TRANSOM (shown)
#700062-1



DUAL HELIX STARTER KIT
HWFG MI - IN-HULL
#700063-1

5-PORT ETHERNET SWITCH

Easily create a network using Ethernet-capable Humminbird fish finders. This waterproof, plug-and-play switch allows you to connect up to five Ethernet-based components. Some Sonar/GPS models require an additional adapter (see list to the right).



AS ETH 5PXG
#408450-1

Models	Cables Required
APEX and SOLIX Series	AS EC 5/10/15/20/30E*
HELIX 15, 12, 10, 9, 8, Series	AS EC 5/10/15/20/30E plus AS EC QDE
HELIX 7 G2N/G3N Series	AS EC 5/10/15/20/30E plus AS EC QDE

* (1) Ethernet cable required to connect each networking fish finder (see Connection Chart above)

POWER CABLES

Cables come in standard six-foot lengths, but can be extended with 18awg multi-strand wire. Connect power to a fuse panel, or through inline fuse holder (not included) if hooked directly to the battery.

Models	Cables
APEX Series	PC 13
SOLIX Series	PC 12
HELIX 15, 12, 10, 9, 8, 7, 5 Series	PC 11 (Recommended for all Down Imaging and Side Imaging products) PC HELIX 12V DC (Not intended for permanent installation)
HELIX 7, 5 Series,	PC 10
	PC HELIX 12V DC (Not intended for permanent installation)
MEGA 360	PC MEGA 360

PC 13
#720110-1

PC MEGA 360
#720118-1

PC 12 OR
#720085-1

PC 11
#720057-1

PC 10
#720002-1

PC HELIX 12V DC
#720105-1



EXTERNAL GPS MODULES

Choose from two external GPS solutions. The AS GRP provides fast and precise position fixes accurate within 8.2 feet, even in lower signal areas. With an integrated heading sensor, the AS GPS HS lets you see compass information and your boat's orientation while moving or sitting still.

Some Humminbird models require additional accessories, see below.

Models	Accessories Required
APEX Series	AS GPS cable required to connect external GPS module
SOLIX Series	AS GPS NMEA cable required to connect external GPS module
HELIX 15, 12, 10, 9, 8 Series	N/A
HELIX 7 G2N and G3N Series	N/A

AS GPS HS
#408400-1

AS GRP
#408920-1



AUTOPILOT ACCESSORIES

Never deviate from your route with the precise control and proven performance of your Humminbird AutoPilot™ system. Easily navigate the SC 110 User Interface thanks to intuitive keys and menus, and a full-color, sunlight-readable display. This rugged pilot features advanced steering-control technology that holds its course even in high winds. Let it take the helm with total confidence, whatever the sea's conditions.



SC 110
#409100-1

SC 110 AUTOPILOT KIT (shown)
#400052-1

SC 110 KIT W/O FB (rudder feedback not included)
#400053-1



SCP 110
#408180-1

FXC 110
#408210-1

SCP CABLE 30
#720077-1

FB 30
#408150-1



HHRP 17-12
#408350-1

HHRP 11-12 (shown)
#408340-1

MOUNTING HARDWARE / COVERS / CASES



UNIT MOUNTS
Use for a second mounting location on your boat or as a great replacement for a worn original.

MOUNTING KNOBS
Use for gimbal bracket units.

IN-DASH MOUNTING KITS
Rugged in-dash mounting kits let you panel-mount your Humminbird for a fully integrated appearance. Includes all mounting hardware.

UNIT COVERS
Cover protects your Humminbird from storage. Hard plastic or neoprene covers depending on model.

CARRYING CASES
Protect your ICE Series flasher with one of these rugged cases featuring plenty of space for the unit, mount and other accessories.

PORTABLE CASE CONVERSION KIT
Portable conversion kits provide a rugged protective case with internal battery compartment and all the hardware needed to convert your Humminbird for portable use.

SERIES

SERIES	GM	MKH	IDMK	UC	ICE
APEX 19 Series	GM A19	—	IDMK RM A19 or IDMK FM APX	UC A19	—
APEX 16 Series	GM A16	—	IDMK RM A16 or IDMK FM APX	UC A16	—
APEX 13 Series	GM A13	—	IDMK RM A13 or IDMK FM APX	UC A13	—
SOLIX 15 Series	GM S15	MKH S	IDMK S15R	UC S15	—
SOLIX 12 Series	GM S12	MKH S	IDMK S12R	UC S12	—
SOLIX 10 Series	GM S10	MKH S	IDMK S10R	UC S10	—
HELIX 15 Series	GM H15	—	IDMK H15	UC H15	—
HELIX 12 Series	GM H12	MKH HL	IDMK H12R	UC H12	—
HELIX 10 Series G1 Series	GM H910	MKH HL	IDMK H910R	UC H910	—
HELIX 10 G2N/G3N/G4N Series	GM H910	MKH HL	IDMK H910R	UC H910	ICE PTC CHIRP H8910
HELIX 9 G1/G2N Series	GM H910	MKH HL	IDMK H910R	UC H910	ICE PTC CHIRP H8910 (G2N only)
HELIX 9 G3N/G4N Series	GM H910	MKH HL	IDMK H89R	UC H89	ICE PTC CHIRP H8910
HELIX 8 Series	GM H910	MKH HL	IDMK H89R	UC H89	ICE PTC CHIRP H8910
HELIX 7 G1 Series	GM H7	MKH HS	IDMK H7R	UC H7 or UC H7PR	ICE PTC X1 9 20 H57, PTC U2 or PTC UNB2
HELIX 7 G2/G3/G2N/G3N Series	GM H7	MKH HS	IDMK H7R	UC H7 or UC H7PR	ICE PTC CHIRP H57 FB, PTC U2 or PTC UNB2
HELIX 5 G1 Series	GM H5	MKH HS	IDMK H5	UC H5	ICE PTC X1 9 20 H57, PTC U2 or PTC UNB2
HELIX 5 G2 Series	GM H5	MKH HS	IDMK H5	UC H5	ICE PTC CHIRP H57 FB, PTC U2 or PTC UNB2

BOAT RIGGING GUIDE

Here are some examples for configuring your One-Boat Network. For more, visit [Humminbird.com/Support/Installation-Diagrams](https://www.humminbird.com/Support/Installation-Diagrams).




SALTWATER INSTALLATION 1

Minn Kota Riptide Trolling Motor with i-Pilot Link, and (1) Console Mount Humminbird unit, and optional GPS/heating sensor.

HELIX SERIES	APEX/SOLIX SERIES
1 Ethernet Adapter Cable AS EC QDE #720074-1	Ethernet Adapter Cable N/A
2 GPS + Heading Sensor AS GPS HS #408400-1	GPS + Heading Sensor APEX: AS GPS HS #408400-1 AS GPS #720113-1 SOLIX: AS GPS HS #408400-1 AS GPS NMEA #720080-1
3 Minn Kota Trolling Motor with i-Pilot Link	Minn Kota Trolling Motor with i-Pilot Link
4 Transducer Splitter Cable 9 M SIDB Y #720101-1	Transducer Splitter Cable 14 M ID SIDB Y #720111-1
5 High Speed Transducer (fiberglass hull) XP 9 HW T #710276-1 High Speed Transducer (aluminum hull) XNT 9 HW T #710274-1	High Speed Transducer (fiberglass hull) XP 14 HW T #710287-1 High Speed Transducer (aluminum hull) XNT 14 HW T #710285-1 Optional Transducer Airmar CHIRP Transducer
6 Optional Transducer (thru-hull) SSTH 14 HW MSI+ T #710302-1 MKR-MI-1 HB #1852088	Optional Transducer SSTH 14 HW MSI+ T #710302-1

*One (1) AS EC 30E 30 ethernet cable included with trolling motor.

The accessories and part numbers listed above are valid as of December 2020. Installations shown are for HELIX G3N/G4N and APEX/SOLIX G2/G3 networking models and Minn Kota trolling motors with i-Pilot Link.

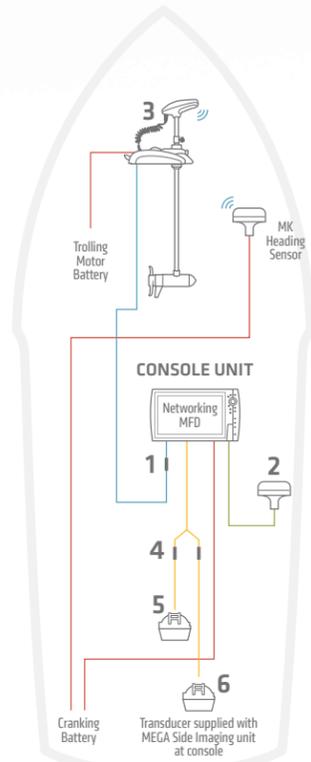


SALTWATER INSTALLATION 2

Minn Kota Riptide Trolling Motor with i-Pilot Link, and (2) Console Mount Humminbird units, GPS/heating sensor, and High Speed Transducer.

HELIX SERIES	APEX/SOLIX SERIES
1 Ethernet Adapter Cable (Need 2) AS EC QDE #720074-1	Ethernet Adapter Cable N/A
2 Ethernet Cable (Need 2) AS EC 5E (5') #720073-6 AS EC 10E (10') #720073-2 AS EC 15E (15') #720073-5 AS EC 20E (20') #720073-3 AS EC 30E (30') #720073-4 AS ECLX 30E (30') #760025-1	Ethernet Cable (Need 2) AS EC 5E (5') #720073-6 AS EC 10E (10') #720073-2 AS EC 15E (15') #720073-5 AS EC 20E (20') #720073-3 AS EC 30E (30') #720073-4 AS ECLX 30E (30') #760025-1
3 GPS + Heading Sensor AS GPS HS #408400-1	GPS + Heading Sensor APEX: AS GPS HS #408400-1 AS GPS #720113-1 SOLIX: AS GPS HS #408400-1 AS GPS NMEA #720080-1
4 Minn Kota Trolling Motor with i-Pilot Link	Minn Kota Trolling Motor with i-Pilot Link
5 5-Port Ethernet Switch AS ETH 5PXG #408450-1	5-Port Ethernet Switch AS ETH 5PXG #408450-1
6 High Speed Transducer (fiberglass hull) XP 9 HW T #710276-1 High Speed Transducer (aluminum hull) XNT 9 HW T #710274-1	High Speed Transducer (fiberglass hull) XP 14 HW T #710287-1 High Speed Transducer (aluminum hull) XNT 14 HW T #710285-1 Optional Transducer Airmar CHIRP Transducer
7 Transducer Splitter Cable 9 M SIDB Y #720101-1	Transducer Splitter Cable 14 M ID SIDB Y #720111-1
8 Minn Kota Talon/Raptor with Bluetooth Talon SWA	Minn Kota Talon/Raptor with Bluetooth Talon SWA
9 Optional Transducer (thru-hull) SSTH 14 HW MSI+ T #710302-1 MKR-MI-1 HB #1852088	Optional Transducer SSTH 14 HW MSI+ T #710302-1

One (1) AS EC 30E 30 ethernet cable included with trolling motor.

The accessories and part numbers listed above are valid as of December 2020. Installations shown are for HELIX G3N/G4N and APEX/SOLIX G2/G3 networking models and Minn Kota trolling motors with i-Pilot Link.

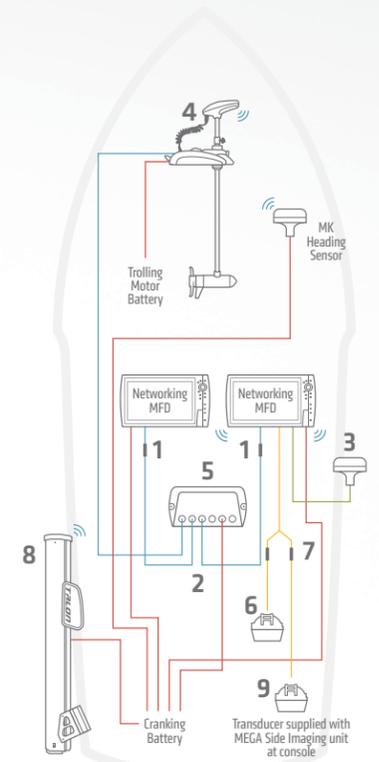


SALTWATER INSTALLATION 3

Minn Kota Riptide Trolling Motor with i-Pilot Link, (2) Console Mount Humminbird units, Humminbird CHIRP radar, Cannon Optimum Downriggers.

HELIX SERIES	APEX/SOLIX SERIES
1 Ethernet Adapter Cable (Need 2) AS EC QDE #720074-1	Ethernet Adapter Cable N/A
2 Ethernet Cable (Need 2) AS EC 5E (5') #720073-6 AS EC 10E (10') #720073-2 AS EC 15E (15') #720073-5 AS EC 20E (20') #720073-3 AS EC 30E (30') #720073-4	Ethernet Cable (Need 2) AS EC 5E (5') #720073-6 AS EC 10E (10') #720073-2 AS EC 15E (15') #720073-5 AS EC 20E (20') #720073-3 AS EC 30E (30') #720073-4
3 GPS + Heading Sensor AS GPS HS #408400-1	GPS + Heading Sensor APEX: AS GPS HS #408400-1 AS GPS #720113-1 SOLIX: AS GPS HS #408400-1 AS GPS NMEA #720080-1
4 Minn Kota Trolling Motor with i-Pilot Link	Minn Kota Trolling Motor with i-Pilot Link
5 5-Port Ethernet Switch AS ETH 5PXG #408450-1	5-Port Ethernet Switch AS ETH 5PXG #408450-1 (SOLIX only), N/A (APEX)
6 Transducer Splitter Cable 9 M SIDB Y #720101-1	Transducer Splitter Cable 14 M ID SIDB Y #720111-1
7 High Speed Transducer (fiberglass hull) XP 9 HW T #710276-1 High Speed Transducer (aluminum hull) XNT 9 HW T #710274-1	High Speed Transducer (fiberglass hull) XP 14 HW T #710287-1 High Speed Transducer (aluminum hull) XNT 14 HW T #710285-1 Optional Transducer Airmar CHIRP Transducer
8 Radar HB 2124 CHIRP Radar #750013-1	Radar HB 2124 CHIRP Radar #750013-1
9 Optimum TS Downriggers (Need 2) Optimum TS #1902340	Optimum TS Downriggers (Need 2) Optimum TS #1902340
10 Optional Transducer (thru-hull) SSTH 14 HW MSI+ T #710302-1 MKR-MI-1 HB #1852088	Optional Transducer SSTH 14 HW MSI+ T #710302-1

*One (1) AS EC 30E 30 ethernet cable included with trolling motor.

The accessories and part numbers listed above are valid as of December 2020. Installations shown are for HELIX G3N/G4N and APEX/SOLIX G2/G3 networking models and Minn Kota trolling motors with i-Pilot Link.

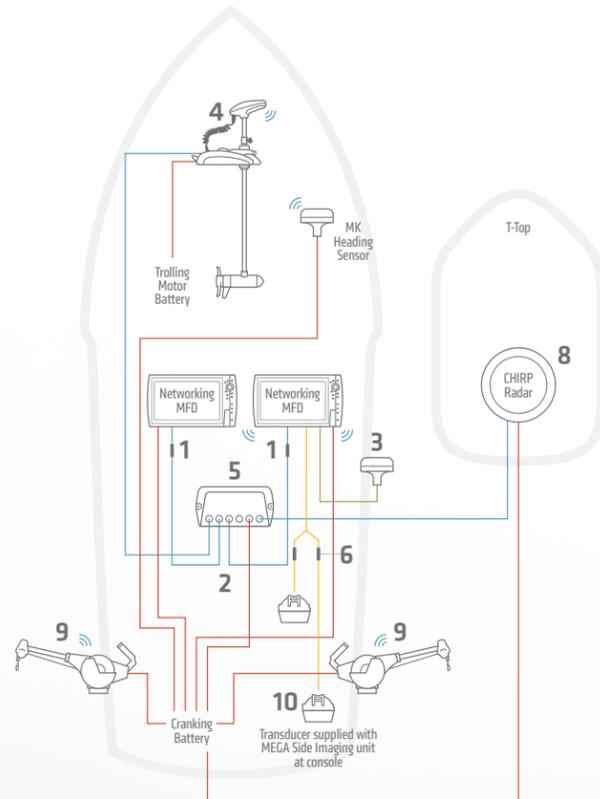

SALTWATER INSTALLATION 4

Minn Kota Riptide Trolling Motor with i-Pilot Link, (2) Console Mount Humminbird units, (1) Humminbird unit at second station, Humminbird CHIRP radar, Talon Shallow Water Anchor.

HELIX SERIES	APEX/SOLIX SERIES
1 Ethernet Adapter Cable (Need 3) AS EC QDE #720074-1	Ethernet Adapter Cable N/A
2 Ethernet Cable (Need 3) AS EC 5E (5') #720073-6 AS EC 10E (10') #720073-2 AS EC 15E (15') #720073-5 AS EC 20E (20') #720073-3 AS EC 30E (30') #720073-4	Ethernet Cable (Need 3) AS EC 5E (5') #720073-6 AS EC 10E (10') #720073-2 AS EC 15E (15') #720073-5 AS EC 20E (20') #720073-3 AS EC 30E (30') #720073-4
3 GPS + Heading Sensor AS GPS HS #408400-1	GPS + Heading Sensor APEX: AS GPS HS #408400-1 AS GPS #720113-1 SOLIX: AS GPS HS #408400-1 AS GPS NMEA #720080-1
4 Minn Kota Trolling Motor with i-Pilot Link	Minn Kota Trolling Motor with i-Pilot Link
5 5-Port Ethernet Switch AS ETH 5PXG #408450-1	5-Port Ethernet Switch AS ETH 5PXG #408450-1 (SOLIX only), N/A (APEX)
6 Transducer Splitter Cable 9 M SIDB Y #720101-1	Transducer Splitter Cable 14 M ID SIDB Y #720111-1
7 High Speed Transducer (fiberglass hull) XP 9 HW T #710276-1 High Speed Transducer (aluminum hull) XNT 9 HW T #710274-1	High Speed Transducer (fiberglass hull) XP 14 HW T #710287-1 High Speed Transducer (aluminum hull) XNT 14 HW T #710285-1 Optional Transducer Airmar CHIRP Transducer
8 Radar HB 2124 CHIRP Radar #750013-1	Radar HB 2124 CHIRP Radar #750013-1
9 Minn Kota Talon/Raptor with Bluetooth (Need 2) Talon SWA	Minn Kota Talon/Raptor with Bluetooth (Need 2) Talon SWA
10 Optional Transducer (thru-hull) SSTH 14 HW MSI+ T #710302-1 MKR-MI-1 HB #1852088	Optional Transducer SSTH 14 HW MSI+ T #710302-1

*One (1) AS EC 30E 30 ethernet cable included with trolling motor.

The accessories and part numbers listed above are valid as of December 2020. Installations shown are for HELIX G3N/G4N and APEX/SOLIX G2/G3 networking models and Minn Kota trolling motors with i-Pilot Link.

