



# okuma

## RISING WITH EVERY CHALLENGE

The average person might stumble upon a remote beach and find inspiration in the texture of the sand, curl of the waves and the salty spice of the air. For the community of anglers, however, playing witness to nature is far less satisfying than direct participation.

As we approach every piece of water, our attention inevitably falls to what lies beneath the surface: beneath the waves, off the point, on the edge of structure, at the intersection of currents. It's the fish and their habits, their power and speed that captivate our attention. Through rod and reel we find our connection. Some call it sport. We call it a way of life that's rich with experiences.

At Okuma Fishing Tackle, our goal is to enhance every encounter. Integrating the latest advancements in materials and construction techniques is a means to downplay the presence of the gear. Eliminate weight and increase feel. Enjoy a running fish instead of fearing it. Button down the drag and go toe-to-toe with complete confidence. Your focus is not on the equipment; it's on the fish.

Wherever your travels take you, from the local pond to distant reef, we're proud to be your partner in the discovery of what lies beneath.

# INDEX

<b>SPINNING REELS</b> .....	<b>223</b>	AK BF.....	258	<b>TROLLING RODS</b> .....	<b>300</b>
MAKAIRA® SPINNING.....	223	CARBONITE B-FEEDER.....	259	MAKAIRA SALTWATER RODS.....	300
<b>NEW</b> TESORO.....	223	CARBONITE XP.....	259	SLY.....	301
<b>NEW</b> SALINA.....	224	<b>BAITCASTING REELS</b> .....	<b>261</b>	<b>NEW</b> COLD WATER IN-LINE.....	301
CEDROS.....	224	KOMODO SS.....	261	SOLTERRA BOAT.....	301
AZORES XP.....	225	CITRIX.....	261	CORTEZ BOAT.....	302
HELIOS SX SPINNING.....	226	SERRANO.....	262	RODSTER BOAT.....	302
ITX CARBON.....	226	CEYMAR.....	262	CATALINA BOAT.....	302
INSPIRA.....	228	JAW.....	262	CLASSIC BOAT.....	303
<b>NEW</b> CEYMAR HD.....	228	SCORPIO.....	263	SALAR TROLL.....	303
TOMCAT.....	230	FUEL SPIN.....	263	MAGDA FINN TROLL.....	303
EPIXOR XT.....	230	<b>CONVENTIONAL REELS</b> .....	<b>266</b>	TOURNAMENT TROLLING UFR.....	304
CEYMAR XT.....	232	TESORO STAR DRAG REELS.....	266	DEEP SEA BOLENTINO.....	304
AVENGER.....	233	CORTEZ.....	266	AVENGER TELE BOAT.....	304
SAFINA PRO.....	233	MAGDA PRO DXT.....	267	<b>JIGGING RODS</b> .....	<b>305</b>
SCORPIO.....	234	CONVECTOR.....	268	AZORES SLOW JIGGING.....	305
ALARIS.....	235	COLD WATER.....	269	TOMCAT.....	305
ALTERA.....	235	<b>NEW</b> SOLTERRA B.....	270	<b>SURF CASTING RODS</b> .....	<b>305</b>
SOLARIS.....	236	CLASSIC PRO XPD.....	270	DISTANCE SURF ARENA.....	305
JAW.....	236	CLASSIC CLX.....	271	SURFLINER SURF.....	306
SAFINA.....	237	MAKAIRA.....	272	WAVE POWER SURF.....	306
AZAKI.....	237	MAKAIRA SEA.....	273	AVENGER PRO TELE SURF.....	306
PINK PEARL V2.....	238	MAKAIRA SEA SILVER.....	274	AVENGER TELE SURF.....	307
CARBONITE RD.....	238	<b>NEW</b> ALIJOS 2-SPEED.....	275	ALARIS TELE SURF.....	307
REVENGER PRO.....	239	CAVALLA.....	276	<b>EGI RODS</b> .....	<b>307</b>
REVENGER.....	239	<b>NEW</b> CAVALLA BLUE.....	277	ARIA EGI.....	307
ARIA.....	240	<b>CENTERPIN REELS</b> .....	<b>279</b>	BIG SQUID.....	308
ELECTRON.....	240	SHEFFIELD FLOAT.....	279	<b>SPECIMEN RODS</b> .....	<b>308</b>
CUSTOM BLACK FEEDER.....	241	<b>SPINNING &amp; CASTING RODS</b> .....	<b>282</b>	LS-8K CARP.....	308
CARBONITE XP FEEDER.....	241	ONE ROD.....	282	8K CARP.....	308
CEYMAR XT MATCH FD.....	242	HELIOS AIR.....	283	LS-6K CARP.....	309
CARBONITE V2 MATCH BF.....	242	PCH AIR.....	283	CUSTOM BLACK CARP.....	309
CARBONITE MATCH.....	243	<b>NEW</b> GUIDE SELECT.....	284	EPIX V2 CARP.....	310
<b>BIG PIT REELS</b> .....	<b>245</b>	EPIXOR.....	286	C-FIGHT CARP.....	310
<b>NEW</b> FLITE SURF.....	245	G-CONTROL.....	286	LONGBOW CARP.....	311
SURF 8K.....	245	HELIOS SX.....	287	AVENGER CARP.....	311
ROCKAWAY.....	246	ECLIPZ.....	288	8K FEEDER.....	312
DISTANCE SURF ARENA.....	246	TOMCAT.....	288	SOLITRON.....	312
<b>NEW</b> OBSIDIAN.....	247	PSYCHO PERCH.....	289	LS-6K FEEDER.....	313
T-REX.....	247	ALTERA.....	290	CEYMAR FEEDER.....	313
8K.....	248	ALARIS.....	291	CUSTOM BLACK FEEDER.....	314
INC.....	248	COMPETITION.....	292	CUSTOM BLACK MATCH.....	314
CUSTOM BLACK.....	249	LRF.....	292	SOLITRON MATCH.....	315
BIG BOMBER SPOD.....	250	DEAD RINGER.....	292	CEYMAR MATCH.....	315
CUSTOM CARP.....	250	SEA TROUT SPIN.....	293	<b>TELE RODS</b> .....	<b>315</b>
CUSTOM.....	250	AZAKI.....	293	AMIGO.....	315
ATOMIC CARP.....	251	PINK PEARL.....	294	AVENTA TELE ROD.....	316
C-FIGHT.....	251	SAFINA-X.....	294	ALTERA TELE SPIN.....	316
<b>BAITFEEDER REELS</b> .....	<b>253</b>	HOT ROD.....	295	COMPETITION BOLO.....	316
LS.....	253	ARIA.....	295	COMPETITION POLE.....	317
AVENTA BF.....	253	FUEL SPIN.....	296	G-POWER TELE POLE.....	317
ROCKAWAY.....	254	WAVE POWER.....	296	<b>SPINNING COMBOS</b> .....	<b>318</b>
LONGBOW XT BF.....	254	LIGHT RANGE FISHING.....	297	<b>ACCESSORIES</b> .....	<b>319</b>
TOMCAT BAITFEEDER.....	255	LIGHT RANGE FISHING TELE.....	297		
CEYMAR BF.....	255	G-POWER.....	298		
PULZAR BF.....	256	RODSTER.....	298		
BARBARIAN BAITFEEDER.....	257	SIIKA.....	299		
DYNA DRAG XP FB.....	257	CARBONITE TELE.....	299		
POWERLINER PRO.....	258				



# NEW PRODUCTS



**INSPIRA**



**COLD WATER**



**GUIDE SELECT SERIES**



**OBSIDIAN**



**CAVALLA BLUE**



**SOLTERRA B SLX**



**FLITE SURF**



**SALINA**



**ALIJOS**



**SCORPIO**



**CEYMAR HD**



**TESORO**



# SPINNING REEL TECHNOLOGY



## MAXGEAR



Makaira reels feature a forged, machine cut stainless steel main gear paired with a 17-4 stainless steel pinion gear. This gear system is unmatched in this category.



## ALG



With today's super braided lines & lighter more compact reels, ALG offers anglers lighter weight gears without compromising on strength & durability. Adding to their longevity, ALG gears are anodized to hold up to the elements much better than traditional gearing materials.



## HDGII



Okuma's proprietary High Density Gearing II incorporates an extremely strong alloy composition with a special anti-corrosion coating process. The result is high density, corrosion resistant gears that are built to handle the severe elements & brutal strains placed on a reel's internal gear system.

## PRECISION ELLIPTICAL GEARING SYSTEM



The Precision Elliptical Gearing System advantage boils down to one thing & one thing only – performance. By regulating the speed of the spindle stroke, reels equipped with this system wind line more consistently & uniformly on the spool, resulting in level line lay. This creates less friction during casting for increased distance, greater accuracy & longer line life, as well as smoother, more uniform drag pressures. Pick up any Okuma reel equipped with this feature & feel for yourself the balance, smoothness & power that are all characteristics of the Precision Elliptical Gearing System.



## SPINNING REEL DUAL FORCE DRAG



DFD incorporates both surfaces of the spool to maximize high-end drag pressure, efficiency & overall smoothness. Mounted in the top of the spool & protected by the Hydro Block system is a multi-disc felt drag system that works in conjunction with a secondary drag system that is mounted under the spool. Even pressure is applied to both surfaces of the spool for maximum stability.



## LITECAST™



Litecast™ is the latest in Okuma's reel technology. Reels with the Litecast™ structure are composed using a magnesium material in the casting process, making the integrity of the reel incredibly strong & 15% lighter than aluminum alloy reels. Okuma Cedros Saltwater Spinning Reels feature the new Litecast™ construction.



## ALUMILITE FRAME CONSTRUCTION



AlumiLite construction incorporates Okuma's rigid aluminum body technology on spinning, trolling and fly reel designs. Aluminum frames are stronger and more rigid and are capable of withstanding more pressure and torque than traditional graphite frames. These lightweight, diecast aluminum frames provide more precise tolerances for precision gear alignment, maximum castability and ultimate durability.



## C-40X



Okuma's C-40X carbon technology utilizes a specially blended graphite polymer. The carbon fibers in this material are elongated & reinforced, creating a substantially stronger composite than standard graphite materials. At 25% lighter, 1.5 times stronger & 100% anti-corrosive, C-40X translates into an extremely lightweight & durable construction.



## TORSION CONTROL ARMOR



The Torsion Control Armor (TCA) design found on the new Inspria spinning reels is made with Okuma's C-40X long-strand carbon fiber technology. This not only makes the reel lighter, but also makes the reel extremely rigid which reduces twist & torque, keeping the internal parts in perfect alignment.



## CYCLONIC FLOW ROTOR



The Cyclonic Flow Rotor (CFR) was designed to create a "cyclonic" airflow, which significantly increases air flow through the ported rotor. This thoroughly tested design allows for a much faster drying time if the reel becomes wet, minimizing corrosion possibilities throughout the reel.



## CENTRIFUGAL DISC BAIL

Okuma's Centrifugal Disc Bail (CDB) is a unique new design that incorporates a heavier brass disc that is perfectly weighted & balanced to create a smoother & easier bail operation, while increasing the strength & stability of the overall bail function.



# SPINNING REEL TECHNOLOGY



## QUICK-SET



This system allows for instant handle engagement & eliminates all handle back play commonly found in many reels. This is accomplished by using a corrosion-resistant stainless steel roller bearing that engages the reel in one direction for rock-solid hook sets.



## EFR II



The Even Flow Roller System utilizes a ball bearing under the line roller to maximize efficiency. This roller helps reduce line twists by freely rolling over the line roller without friction. Without this system, line will naturally twist when drag is pulled.



## BAITFEEDING SYSTEM



Okuma's baitfeeding system allows anglers to disengage their spinning reel spool & allow their bait to run freely. The baitfeeding system incorporates a secondary micro-adjustable drag system at the rear of the reel that allows for precise adjustment of the spool for bait control. In order to disengage this system simply turn the handle. The On/Off lever on the rear of the reel will automatically disengage the baitfeeding system so you can fight your fish with the main drag system.

## RES II



The RES II System stands for Rotor Equalizing System. This second-generation RES System incorporates a computer-balanced weight precisely placed in the rotor. This weight allows for precision balance & eliminates all spool wobble for perfect alignments & smooth cranking.



## HIGH PERFORMANCE BEARINGS



The balls used on the HPB's are constructed from the same high-grade stainless steel material as the bearing housing. These bearings were designed to be more than 10 times more resistant to saltwater than standard stainless steel bearings. These bearings may even outlast the angler himself.



## HYDRO BLOCK



The Hydro Block design features a rubber gasket mounted in the top of a spinning reel spool. This rubber seal blocks water & foreign materials from entering the drag system. The Hydro Block system ensures that your drag washers always perform at optimal levels.



# LOW PROFILE REEL TECHNOLOGY



## FLITE™ SPOOL



Flight spool is a Dream Tackle Design allowing Okuma to offer a super tuned spool on our premium baitcast reels. The spool is 33mm in diameter and was developed for long distance casting as well as finesse style fishing. The complete spool design weighs in at just 0.33 ounces as a result of its uniform thickness, which is what helps set this super tuned spool apart from others.



## MCS



Okuma's Magnetic Control System reduces backlash & improves casting distance by utilizing the magnetic field generated by the high RPM spinning of the spool during casting. The magnetic field is influenced by the adjustable cast control magnets which exert an opposing force & allows for minute & accurate adjustments.

## VELOCITY CONTROL



The Velocity Control System is an adjustable, 6-pin centrifugal braking system for precision spool control. Weights can be adjusted IN or OUT for additional spool control. Positioning the weights in toward the spool allows for more freespool, while adjusting the pins out away from the spool allows for more control. Anglers can alternate weights until they find that perfect balance for casting.

## SPOOL ACCESS PORT




This unique new design can be found on Okuma's low profile baitcast reels. The Spool Access Port allows for quick access to the spool by simply sliding the lock/unlock lever on the sideplate opposite the handle. This system allows for quick spool changes, but more importantly it allows quick access for adjusting the Velocity Control System.



## FLITE™ SHAFT



Flite shaft is a patented hollow stainless steel spool shaft with precision stainless steel balls pressed on each end. These balls rotate under pressure to reduce friction and help increase casting distance. Providing the perfect balance point between weight, strength and smoothness.



## UNIVERSAL LINE DIAM INDICATOR

Always know what line you spooled on your reel when you pick it up.



## TGT (TRACTION GRIP TECHNOLOGY)



Okuma TGT is made of non-slip durable materials that not only provides maximum grip, but comfort and control in all weather conditions.



# TROLLING AND CONVENTIONAL REEL TECHNOLOGY



## XL GEARING

The XL gearing design found on both lever drag & star drag reels incorporates an oversized gear box that features an enlarged gearing system & enlarged drag system. The drag surface areas on this system are more than 50% larger than a standard gear-box design. For the gear system, the major advantage is that the gear teeth are substantially larger, allowing more strength & cranking power. This is how we are able to offer a high-speed gear ratio reel without sacrificing cranking power. Our XL gearing system essentially turns your reel into a winch.

## SELF LUBRICATING GEAR SYSTEM

The self-lubricating gear system is a feature found on Okuma's higher-end star drag reels. The main gear on this system incorporates a heat-sensitive oil-impregnated brass bushing that is mounted in the center of the gear. This system releases oil if friction increases to keep the main gear & drive shaft running smoothly in all conditions. Okuma is the first company to adopt this technology which originated in the large machine industry where this function has been time tested for many years.



## MACHINED RIGID FRAME

Okuma's Machined Rigid Frame construction incorporates a one-piece fully-machined aluminum frame. These rigid bar-stock aluminum frames are the ultimate in precision alignment & tolerances withstanding more pressure & torque than any other material used in our industry for frame materials. Okuma features these anodized frames on fly reels, baitcast reels, lever drag reels & star drag trolling reels.

## LEVER DRAG DUAL FORCE DRAG

For extremely smooth & strong drag outputs, Okuma's Makaira and Alijo's 2-speed reels are designed with a patented Dual Force Drag system. This drag system is specifically engineered to be mounted in the right side of the spool, designed around a Pull Bar Drag System which keeps all mechanical workings in precise alignment & places no pressure on the frame. This system works in conjunction with a custom designed thrust bearing, which alleviates side load at heavy drag settings.



## BODY ARMOR

Okuma's stainless steel Body Armor eliminates the frame flex commonly found in graphite framed trolling reels. This feature incorporates two large stainless steel rings that are mounted to both sides of the frame. The harness lugs are integrated into the body armor design & eliminate the pressure commonly placed on the harness lugs by redistributing the pressure to these large-diameter rings.

## 2-SPEED GEARING

Okuma's 2-speed technology incorporates two sets of stainless steel main & pinion gears, allowing anglers the option of a high-speed gear ratio or a powerful low-speed gear ratio for maximum power & torque. To shift gears it is as easy as pushing a button or popping a lever with Okuma's unique shifting design to obtain the appropriate gear ratio you desire.



## SPEED LOC PINION GEAR SYSTEM

The SLG technology incorporates a dual-step pinion gear system on star drag reels that allows positive engaging at extreme high speeds. The SLG system allows for instant gear engagement when engaging from freespool to strike at speeds in excess of 50 MPH.



## MSS

Strong, Stable, Smooth - Okuma's Mechanical Stabilizing System is a support system that ties the spool shaft, pinion gear, pinion gear bearing, drive shaft & main gear together with a single support system. While other reels on the market offer minimal or no gear stabilization, this patented Okuma design allows all of these critical parts to stay in precise alignment. Designed specifically to hold up to the demands of braided & wire line fishing, the MSS support system stabilizes the spool shaft at 3 key stress points to eliminate flex under pressure - which directly translates into a reel that is more durable, stronger & smoother than the competition.

## MCS

Okuma's Magnetic Control System is a fully-sealed, 100% waterproof cast control system that reduces backlash & improves casting distance by utilizing the magnetic field generated by the high RPM spinning of the spool during casting. The magnetic field is influenced by the adjustable cast control magnet which exerts an opposing force & allows for minute & accurate adjustments.



## WIDE MOUTH LEVELWIND

This heavy-duty, stainless steel levelwind is Titanium coated & built to withstand the punishment of both braided & wire lines. The guide has been designed with an increased opening to insure proper knot clearance when fishing with double lines. This wide space allows for Albright or similar connection knots, as well as swivels & copper line to pass through the guide easier & be wound directly on the spool.

## STRIKE ZONE

Okuma's Strike Zone linecounter system incorporates a mechanical counter that precisely measures line based on spool revolutions. These counters measure in feet & are calibrated at the factory to be most accurate with a full spool & monofilament lines.



## T-BAR HANDLE

T-Bar Handle: The patented design of the T-Bar handle offers a true ergonomically correct angle to ensure an angler gets maximum power with minimum fatigue. The T-bar takes full advantage of the natural dynamics of the human hand, wrist & forearm to help sustain power & endurance for the angler.

## ERGO GRIP

The Ergo Grip handle knob is an extremely comfortable oversized handle-knob design for both speed & power. This soft-touch knob has been ergonomically designed to fit in the palm of your hand & will be found on certain Okuma lever drag reels, star drag reels & some spinning reel models.



## HIPPO GRIP

The Hippo Grip is a unique reel-clamp design that serves triple duty when fishing offshore. This heavy-duty, forged aluminum reel clamp securely supports your reel to the rod for maximum safety. This clamp also incorporates a small hole that was designed to be used with a safety line for trolling. On the rear of the clamp is a large diameter hole that was designed to be used as a trigger. The large hole should be mounted facing the butt of the rod.

## CRC

Okuma's Corrosion Resistance Coating (CRC) consists of a thin layer of Corrosion X HD applied to all internal & external parts. The CRC process actually penetrates & bonds to the metal, which helps significantly in the reduction of corrosion, & towards the long term protection of your reel.





# SPINNING REELS



**SPINNING - SALTWATER**

**MAKAIRA® SPINNING**

Okuma MAKAIRA spinning reels constructed from the finest and strongest materials available are the toughest and most durable spinning reels, especially for big games from Giant Trevally, trophy-sized Yellowtail and Amberjack, to the most formidable adversaries in the ocean, like giant Bluefin Tuna, Marlin, Yellowfin Tuna and large sharks.

**FEATURES**

- Forged aluminum, machine cut body / sideplate.
- Forged aluminum, machine cut Cyclonc Flow rotor.
- Forged stainless steel main gear for ultimate power and strength.
- Precision machine cut 17-4 grade stainless steel pinion gear.
- Oversized 17-4 grade stainless steel spool shaft reduces flex.
- Hydro Sealed Body (IPX7 WATERPROOF) and DFD system for maximum protection.
- Carbonite high output drag with Cal's drag grease on full DFD.
- Customized pre-set drag system, works like a lever drag reel.
- Dual anti-reverse system for maximum strength and reliability.
- Quick-Set stainless steel German anti-reverse roller bearing.
- Machined aluminum, 2-tone anodized spool with LCS lip.
- Machined aluminum screw-in handle arm for added strength.
- Right and Left handles are designed differently



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136221	MK-10000L	810 g	4.9:1	9+1	101.6 cm	25 kg	0.35/380, 0.40/300, 0.45/225	4718947026798
136507	MK-20000LS	997 g	5.8:1	9+1	131.1 cm	30 kg	0.45/450, 0.50/370, 0.55/300	4718947017024
136508	MK-30000LS	1107 g	5.8:1	9+1	166.9 cm	30 kg	0.55/530, 0.60/450, 0.65/380	4718947017031



**SPINNING - SALTWATER**

**NEW**

**TESORO**

The ultimate saltwater performer, the Tesoro features an oversized brass drive gear for strength and durability – further enhanced by the Gearing Stabilization Design for improved gear alignment. The IPX-7 rated Hydro Sealed Body protects against full water submersion and splashing. Within the Tesoro's full-Alumilite body resides a Dual Force Drag system with a whopping 29,9 kgs of max drag power.

**FEATURES**

- Full-Alumilite Body & Sideplate
- IPX-7 Rated Hydro Sealed Body CFR: Cyclonic Flow Rotor
- Carbonite High-Output Drag with Cal's Drag Grease on Full Dual Force Drag
- 12HPB + 1RB Corrosion-Resistant Stainless Steel Bearings
- Dual Anti-Reverse System for Maximum Strength and Reliability
- Machined Aluminum Screw-In Handle Arm for Added Strength
- Smooth Machine-Cut Brass Gearing with an Over-Sized Drive Gear
- Gearing Stabilization Design for Gear Alignment
- Frictionless Main Shaft Design
- Oversized Titanium Spool Shaft for Maximum Strength-to-Weight Ratio



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
● 142194	TSR-8000PA	697 g	4.9:1	12+1	93 cm	25 kg	0.40/230, 0.45/180, 0.50/140	4718947083388
● 142195	TSR-10000PA	714 g	4.9:1	12+1	101 cm	25 kg	0.40/290, 0.45/220, 0.50/175	4718947083395
● 142196	TSR-14000PA	714 g	4.9:1	12+1	105 cm	25 kg	0.40/370, 0.45/290, 0.50/230	4718947083401
● 142197	TSR-18000PA	928 g	4.9:1	12+1	106 cm	25 kg	0.50/320, 0.55/260, 0.60/215	4718947080400
● 142198	TSR-20000PA	928 g	4.9:1	12+1	111 cm	25 kg	0.50/385, 0.60/260, 0.70/180	4718947080417



## SPINNING - SALTWATER

NEW

## SALINA

The Salina saltwater spinning reel's LITECAST magnesium alloy construction provides the strength and rigidity of aluminum – but 15 % lighter. Building on that foundation of muscle, the Salina offers a Dual Force Drag system with 20 kg max drag power. When fighting strong fish, the 3-point pinion gear stabilization design provides precise alignment, even under heavy loads.

## FEATURES

- DFD: Precision Dual Force Drag System
- LITECAST Construction
- Multi-Disc Drag Adjustment for More Precise Settings
- 20 kg Max Drag | 6HPB + 1RB Corrosion-Resistant Stainless Steel Bearings
- Full Grease Pack Prevents Water Intrusion
- Rubber-Sealed Bearings for Ultimate Protection
- Machined Aluminum Screw-In Handle
- Machined Aluminum 2-Tone Anodized Round Knob
- Even Flow Roller System with DLC Coating
- Manual Bail Trip Function for Ultimate Reliability
- Machined Aluminum 2-Tone Anodized Spool



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
Salina High Speed								
● 142185	SA-4000HA	413 g	5.8:1	6+1	90 cm	15 kg	0.25/280, 0.30/185, 0.35/130	4718947089748
● 142186	SA-5000HA	422 g	5.8:1	6+1	95 cm	15 kg	0.30/240, 0.35/170, 0.40/125	4718947089755
● 142187	SA-6000HA	432 g	5.8:1	6+1	101 cm	15 kg	0.30/315, 0.35/220, 0.40/165	4718947089762
Salina								
● 142188	SA-8000A	650 g	5.4:1	6+1	103 cm	20 kg	0.40/230, 0.45/180, 0.50/140	4718947082718
● 142189	SA-10000A	666 g	5.4:1	6+1	112 cm	20 kg	0.40/290, 0.45/220, 0.50/175	4718947082725
● 142190	SA-14000A	648 g	5.4:1	6+1	116 cm	20 kg	0.40/370, 0.45/290, 0.50/230	4718947082732

## SPINNING - SALTWATER

## CEDROS


Specifically designed for saltwater use, the Cedros spinning reels feature Okuma's Litecast Blade body design, Dual Force Drag System for extreme stopping power & our proprietary High Density Gearing with a special corrosion resistant coating. Combine this with a high-speed gear ratio & a customized aluminum handle, you have one of the best saltwater jig fishing reels on the market.

## FEATURES

- DFD: Precision Dual Force Drag system
- Multi-disc drag adjustment for more precise settings
- LITECAST: Body construction is 15% lighter
- CRC: Corrosion resistant coating process
- 6HPB + 1RB corrosion resistant stainless steel bearings
- Dual anti-reverse feature on 8000-14000 sizes
- Quick-Set anti-reverse roller bearing
- Manual bail trip function 8000-14000 sizes
- HDGII: Corrosion resistant, High density gearing
- Precision machine cut brass pinion gear
- Machined aluminum, 2-tone anodized spool
- Machined aluminum, screw-in handle arm



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136605	CJ-8000	624 g	5.4:1	6+1	104 cm	20 kg	0.40/230, 0.45/180, 0.50/140	4718947041715
136243	CJ-10000	643 g	5.4:1	6+1	112 cm	20 kg	0.40/290, 0.45/220, 0.50/175	4718947040701
136948	CJ-14000	646 g	5.4:1	6+1	116 cm	20 kg	0.40/370, 0.45/290, 0.50/230	4718947043634

Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136602	CJ-4000H	380 g	5.8:1	6+1	90 cm	15 kg	0.25/280, 0.30/185, 0.35/130	4718947044068 
136603	CJ-5000H	397 g	5.8:1	6+1	95 cm	15 kg	0.30/240, 0.35/170, 0.40/125	4718947044075 
136604	CJ-6000H	405 g	5.8:1	6+1	101 cm	15 kg	0.30/315, 0.35/220, 0.40/165	4718947044082 

**SPINNING - SALTWATER**










**AZORES XP**

Okuma Azores XP Spinning Reel is suitable for saltwater fishing, equipping with rigid diecast aluminum body, sideplate and rotor. It also features 6HPB + 1RB corrosion resistant stainless steel bearings, multi-disc, carbonite and felt drag washers for DFD, and corrosion-resistant, high density gearing.

**FEATURES**

- DFD: Precision Dual Force Drag system
- Precision click drag adjustment for more precise settings
- Multi-disc, carbonite and felt drag washers for DFD
- 6HPB + 1RB corrosion-resistant stainless steel bearings
- Quick-Set anti-reverse roller bearing plus ratchet system
- Dual anti-reverse system for maximum security
- Precision machine-cut brass pinion gear
- CRC: Corrosion-resistant coating process
- HDGI: Corrosion-resistant, High-Density Gearing
- ALC: Rigid diecast aluminum body, side plate and rotor
- MSS: Carbon Mechanical Stabilizing System
- Machined aluminum, 2-tone anodized spool with LCS lip
- Machined aluminum handle arm for added strength
- Hydro Block water-tight drag seal



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>Azores XP High Speed</b>								
136606	ZXP-4000H	335 g	5.8:1	6+1	91 cm	13 kg	0.25/290, 0.30/200, 0.35/150	4718947059024 
136607	ZXP-6000H	526 g	5.8:1	6+1	105 cm	13 kg	0.30/300, 0.35/220, 0.40/170	4718947059949 
136608	ZXP-8000H	720 g	5.4:1	6+1	110 cm	20 kg	0.40/250, 0.45/200, 0.50/160	4718947059956 
136943	ZXP-14000H	738 g	5.4:1	6+1	120 cm	20 kg	0.40/370, 0.45/290, 0.50/240	4718947060006 
142255	ZXP-16000H	740 g	5.4:1	6+1	120 cm	20 kg	0.40/420, 0.45/335, 0.50/270	4718947059963 
<b>Azores XP Low Speed</b>								
148180	ZXP-6000P	526 g	4.8:1	6+1	87 cm	13 kg	0.30/300, 0.35/220, 0.40/170	4718947059031 
148181	ZXP-8000P	720 g	3.8:1	6+1	77 cm	20 kg	0.40/250, 0.45/200, 0.50/160	4718947059048 
148182	ZXP-14000P	738 g	3.8:1	6+1	84 cm	20 kg	0.40/370, 0.45/290, 0.50/240	4718947059055 
148178	ZXP-16000P	740 g	3.8:1	6+1	84 cm	20 kg	0.40/420, 0.45/335, 0.50/270	4718947058584 



## SPINNING - ALLROUND

## HELIOS SX SPINNING

The body, side plate and rotor of the Helios SX are constructed of Okuma C-40X long-strand carbon fiber. Parts constructed from C-40X carbon fiber are 25% lighter and 50% stronger than their graphite counterparts. C-40X construction is also completely corrosion-free. At the back end of the reel and including the reel stem and foot is Okuma Torsion Control Armor. This unique design anchors the reel body within a wide yoke. Under stress, this wide footprint virtually eliminates flex and twist. Furthermore, it maintains a firm connection between the internal gears. On the Helios SX, the full rotor system is ported to an extreme level. Instead of guarding against water intrusion, the Cyclonic Flow Rotor focuses on evacuating water from the system and drying the reel out. In rainy environments, the rotor system dries faster than a traditional design when both are put into dry storage after a wet day of fishing.

## FEATURES

- Lightweight C-40X carbon frame and sideplates
- C-40X Cyclonic Flow Rotor for corrosion resistance
- TCA: Torsion Control Armor reduces twisting
- 8HPB + 1RB corrosion-resistant stainless steel bearings
- Quick-Set anti-reverse roller bearing
- Precision machine-cut brass pinion gear
- ALG: Precision AlumiLite alloy main gear and oscillating gears
- Rigid, machined aluminum, anodized handle
- Lightweight, EVA handle knobs for comfort
- Precision Elliptical Gearing system
- Machined aluminum, 2-tone anodized spool
- Heavy-duty, solid aluminum bail wire
- RESII: Computer balanced Rotor Equalizing System
- Metal line clip
- LCS line control spool



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136244	HSX-20	180 g	5.0:1	8+1	60.7 cm	3 kg	0.15/240, 0.20/140, 0.25/90	4718947015525
136245	HSX-30	202 g	5.0:1	8+1	68.6 cm	6 kg	0.20/300, 0.25/200, 0.30/130	4718947015518
136246	HSX-40	262 g	5.0:1	8+1	76.2 cm	6 kg	0.25/260, 0.30/180, 0.35/130	4718947015532
136609	HSX-40S	260 g	5.8:1	8+1	91.2 cm	6 kg	0.25/260, 0.30/180, 0.35/130	4718947017734

## SPINNING - ALLROUND









## ITX CARBON

Designed for both fresh and saltwater applications, Okuma's ITX Carbon spinning reel breaks boundaries with its cutting-edge material innovations. The ITX Carbon features Okuma's long-strand C-40X carbon-fiber technology that enables a reel construction that's corrosion-resistant, durable – and lightweight. Paired with the screw-in handle made from machined aluminum and the twist-eliminating Torsion Control Armor technology, the result is a reel that maintains its rock-solid feel for seasons. The ITX Carbon's high-speed gear ratios, grease-packed high-performance bearings, and multi-disc carbon fiber drag system allow for a smooth and adrenaline-fueled angling experience – whether it's freshwater pike or inshore redfish you're targeting. The drag system's Hydro Block gasket is coupled with the proprietary Cyclonic Flow Rotor Technology that ushers all excess moisture from the reel's housing with a cyclone-like airflow.

## FEATURES

- Lightweight and rigid C-40X carbon TCA and rotor
- Multi-disc, carbon fiber drag system with Hydro Block gasket
- 7HPB + 1RB High-performance, grease-packed bearings
- Quick-Set anti-reverse roller bearing
- CFR: Cyclonic Flow Rotor Technology
- Machined aluminum screw-in handle design
- TGT Grip: Traction Grip Technology
- High speed on all models
- Precision machine-cut brass pinion gear
- Machined aluminum, 2-tone anodized aluminum spool
- Heavy-duty, solid aluminum bail wire
- RESII: Computer-balanced Rotor Equalization System



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136860	ITX-1000	200 g	5.0:1	7+1	61 cm	3 kg	0.15/250, 0.20/140, 0.25/90	4718947068941 
136250	ITX-1000H	200 g	5.8:1	7+1	73 cm	3 kg	0.15/250, 0.20/140, 0.25/90	4718947065902 
136297	ITX-2500	235 g	5.0:1	7+1	69 cm	8 kg	0.20/250, 0.25/165, 0.30/110	4718947068958 
136251	ITX-2500H	235 g	6.0:1	7+1	85 cm	8 kg	0.20/250, 0.25/165, 0.30/110	4718947063168 
136298	ITX-3000	235 g	5.0:1	7+1	69 cm	8 kg	0.20/300, 0.25/200, 0.30/130	4718947072177 
136252	ITX-3000H	235 g	6.0:1	7+1	85 cm	8 kg	0.20/300, 0.25/200, 0.30/130	4718947063175 
136861	ITX-4000	285 g	5.0:1	7+1	76 cm	10 kg	0.25/260, 0.30/180, 0.35/130	4718947068965 
136253	ITX-4000H	285 g	6.0:1	7+1	94 cm	10 kg	0.25/260, 0.30/180, 0.35/130	4718947063182 



## SPINNING - ALLROUND

## INSPIRA

Okuma INSPIRA spinning reels features the TORSION CONTROL ARMOR® design and constructed of C-40X carbon make the reels extremely rigid and lightweight, also reduce twist and torque and keep all internal parts perfectly aligned for freshwater and inshore saltwater fishing.

## FEATURES

- Lightweight C-40X carbon frame and sideplates
- 8BB + 1RB stainless steel bearings
- Quick-Set anti-reverse roller bearing
- Precision machine-cut brass pinion gear
- Rigid, forged aluminum, anodized handle
- Lightweight, EVA handle knobs for comfort
- Precision Elliptical Gearing system
- Machined aluminum, 2-tone anodized spool
- Heavy-duty, solid aluminum bail wire
- CFR: Cyclonic Flow Rotor



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136247	ISX-20B	182 g	5.0:1	8+1	60.7 cm	3 kg	0.15/240, 0.20/140, 0.25/90	4718947014252 
136249	ISX-40B	268 g	5.0:1	8+1	76.2 cm	6 kg	0.25/260, 0.30/180, 0.35/130	4718947012265 
136248	ISX-30B	213 g	5.0:1	8+1	68.6 cm	6 kg	0.20/300, 0.25/200, 0.30/130	4718947012258 

## SPINNING - ALLROUND








## CEYMAR HD

Continuing the top-selling line-up, the Ceymar HD offers crossover performance for both fresh and saltwater anglers. The spinning reel's oversized drive gear delivers increased power and durability – while the Gearing Stabilization Design improves gear alignment for smooth and reliable operation. The Ceymar HD's machined aluminum screw-in handle is in direct contact with gears and reduces handle play and improves the overall feel while cranking.

## FEATURES





- HDG-II: High-Density Gearing II
- Oversized Gearing
- Corrosion-Resistant Graphite Body
- Gearing Stabilization Design
- Aluminum Screw-In Handle
- Frictionless Main Shaft Design
- Even Flow Roller System with DLC Coating



Product Number	Model	Weight	Gear Ratio	Bearings	Max Drag	Line Capacity	Barcode
<b>Ceymar HD</b>							
142176	CHD-1000A	196 g	5.2:1	7+1	5 kg	0.15/255, 0.20/140, 0.25/90	4718947087164 
142177	CHD-2500A	235 g	5.3:1	7+1	6 kg	0.20/250 0.25/165 0.30/110	4718947089717 
142179	CHD-3000A	235 g	5.3:1	7+1	6 kg	0.20/310 0.25/200 0.30/135	4718947082756 
142181	CHD-4000A	273 g	5.2:1	7+1	9 kg	0.25/280 0.30/185 0.35/130	4718947086266 
142183	CHD-C5000A	276 g	5.2:1	7+1	9 kg	0.30/240 0.35/170 0.40/125	4718947089366 
<b>Ceymar HD High Speed</b>							
142336	CHD-1000HA	196 g	6.0:1	7+1	5 kg	0.15/255, 0.20/140, 0.25/90	4718947089380 
142178	CHD-2500HA	235 g	6.0:1	7+1	6 kg	0.20/250 0.25/165 0.30/110	4718947089700 
142180	CHD-3000HA	235 g	6.0:1	7+1	6 kg	0.20/310 0.25/200 0.30/135	4718947089397 
142182	CHD-4000XA	273 g	6.2:1	7+1	9 kg	0.25/280 0.30/185 0.35/130	4718947089403 
142341	CHD-C5000XA	276 g	6.2:1	7+1	9 kg	0.30/240 0.35/170 0.40/125	4718947089373 





Product Number	Model	Weight	Gear Ratio	Bearings	Max Drag	Line Capacity	Barcode
<b>Ceymar HD Shallow Spool</b>							
142337	CHD-1000SA	196 g	5.2:1	7+1	5 kg	PE0.4(0.104)-100m, PE0.6(0.128)-60m, PE0.8(0.148)-40m	4718947089410 
142339	CHD-3000SA	234 g	5.3:1	7+1	6 kg	PE0.6(0.128)-210m, PE0.8(0.148)-150m, PE1.0(0.165)-125m	4718947089427 
<b>Ceymar HD High Speed Shallow Spool</b>							
142338	CHD-1000SHA	196 g	6.0:1	7+1	5 kg	PE0.4(0.104)-100m, PE0.6(0.128)-60m, PE0.8(0.148)-40m	4718947089434 
142340	CHD-3000SHA	234 g	6.0:1	7+1	6 kg	PE0.6(0.128)-210m, PE0.8(0.148)-150m, PE1.0(0.165)-125m	4718947089441 

**SPINNING - ALLROUND**

**TOMCAT**

Okuma Tomcat spinning reels feature corrosion-resistant graphite body, precision elliptical oscillation, 6 ball bearings + 1 roller bearing, and dual force drag which is on size 14,000.

**FEATURES**

- Corrosion-resistant graphite body
- 6 ball bearings + 1 roller bearing
- Quick-Set infinite anti-reverse system
- Machine cut brass pinion
- Precision elliptical oscillation
- Multi-disc, Japanese oiled felt drag washers
- DFD : Dual Force Drag on size 14000
- RES II : Computer balanced Rotor Equalizing System
- Design rigid handle
- TPE Ergo grip handle knob
- 2 tones aluminum spool
- Metal round line clip



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136867	TMC-3000	236 g	5.0:1	6+1	66 cm	7 kg	0.20/265, 0.25/170, 0.30/115	4718947068576
136868	TMC-4000	301 g	5.0:1	6+1	76 cm	8 kg	0.25/260, 0.30/180, 0.35/135	4718947067067
136869	TMC-6000	445 g	4.5:1	6+1	79 cm	15 kg	0.30/275, 0.35/200, 0.40/155	4718947047441
136870	TMC-8000	631 g	4.8:1	6+1	97 cm	16 kg	0.40/210, 0.45/165, 0.50/135	4718947047403
148148	TMC-14000	687 g	4.8:1	6+1	109 cm	18 kg (DFD)	0.40/370, 0.45/290, 0.50/230	4718947047410
148179	TMC-16000	668 g	4.8:1	6+1	109 cm	16 kg	0.40/420 0.45/335 0.50/270	4718947058874

**SPINNING - ALLROUND**

**EPIXOR XT**

The Epixor XT spinning reels were designed with the latest technology and insight from leading fishermen around the country. The Epixor XT features graphite side plates and rotor, and Okuma's C-40X long-strand carbon fiber construction on its TCA- Torsion Control Armor frame design. Another key technology in the Epixor XT reels is the slow oscillation system. This slower oscillation system gives an exceptional line lay upon retrieve and is optimized for use with braided line.

**FEATURES**

- TCA™: C40x carbon TORSION CONTROL ARMOR® reduces twisting
- Multi-disc, Japanese oiled felt drag washers
- 7BB+1RB stainless steel bearings
- Quick-Set ant-reverse bearing
- Precision machine cut brass pinion gear
- Slow oscillation system for improved line lay
- Corrosion resistant graphite body and rotor
- CFR: Cyclonic Flow Rotor technology
- Rigid metal handle design for strength
- Machined aluminum, 2-tone anodized spool with LCS lip
- Heavy duty solid aluminum bail wire
- RESII: Computer balanced Rotor Equalizing System



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136299	EPXT-20	208 g	5.0:1	7+1	61 cm	5 kg	0.15/250, 0.20/140, 0.25/90	4718947023261
136300	EPXT-30	249 g	5.0:1	7+1	69 cm	8 kg	0.20/300, 0.25/200, 0.30/130	4718947023278
136862	EPXT-30S	255 g	6.0:1	7+1	85 cm	8 kg	0.20/300, 0.25/200, 0.30/130	4718947047427
136256	EPXT-40	304 g	5.0:1	7+1	76 cm	10 kg	0.25/260, 0.30/180, 0.35/130	4718947023285
136863	EPXT-40S	310 g	6.0:1	7+1	94 cm	10 kg	0.25/260, 0.30/180, 0.35/130	4718947047434
136610	EPXT-55	316 g	5.0:1	7+1	87 cm	12 kg	0.30/300, 0.35/220, 0.40/170	4718947036292





**SPINNING - ALLROUND**

**CEYMAR XT**

Multi-disc, Japanese oiled felt drag system • 7BB+1RB for ultimate smoothness, 6BB+1RB on size 10 and 20 • Quick-Set anti-reverse roller bearing • Precision machine cut brass pinion gear • Corrosion-resistant graphite body • Rigid, forged zinc, black anodized handle design • Light weight, TPE handle knobs for comfort • Precision Elliptical Gearing system • Machined aluminum, 2-tone anodized spool • Heavy duty, solid aluminum bail wire • RESII: Computer balanced Rotor Equalizing System • Line control system on the spool for better line casting • Alum handle with EVA knob • Plastic line clip • Spare aluminum spool

**FEATURES**

- Multi-disc, Japanese oiled felt drag system
- 7BB+1RB for ultimate smoothness, 6BB+1RB on size10
- Quick-Set anti-reverse roller bearing
- Precision machine cut brass pinion gear
- Corrosion-resistant graphite body
- Rigid, forged zinc, black anodized handle design
- Light weight, TPE handle knobs for comfort
- Precision Elliptical Gearing system
- Machined aluminum, 2-tone anodized spool
- Heavy duty, solid aluminum bail wire
- RESII: Computer balanced Rotor Equalizing System
- Line control system on the spool for better line casting
- Alum handle with EVA knob
- Plastic line clip
- Spare alum spool



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>Ceymar Xt Front Drag</b>								
136259	CXT-10	170 g	5.0:1	6+1	55.4 cm	3 kg	0.10/260, 0.14/150, 0.16/115	4718947016027
136260	CXT-20	196 g	5.0:1	6+1	61 cm	3 kg	0.15/250, 0.20/140, 0.25/90	4718947046055
136351	CXT-25	227 g	5.0:1	7+1	65.5 cm	7 kg	0.15/295, 0.20/170, 0.25/110	4718947015914
136951	CXT-30	232 g	5.0:1	7+1	65.5 cm	7 kg	0.20/200, 0.25/130, 0.30/100	4718947015921
136952	CXT-35	269 g	5.0:1	7+1	76.2 cm	8 kg	0.25/195, 0.30/135, 0.35/100	4718947015938
136352	CXT-40	283 g	5.0:1	7+1	76.2 cm	8 kg	0.25/240, 0.30/170, 0.35/125	4718947015945
136967	CXT-55	403 g	4.5:1	7+1	79 cm	10 kg	0.30/325, 0.35/240, 0.40/185	4718947015952
136968	CXT-65	586 g	4.8:1	7+1	97.3 cm	16 kg	0.35/340, 0.40/265, 0.50/160	4718947015969
<b>Ceymar Xt Rear Drag</b>								
137343	CXTR-30	232 g	5.0:1	7+1	65.5 cm	7 kg	0.20/200, 0.25/130, 0.30/100	4718947015990
137344	CXTR-40	283 g	5.0:1	7+1	76.2 cm	8 kg	0.25/240, 0.30/170, 0.35/125	4718947016010



**SPINNING - ALLROUND**

**AVENGER**

Okuma Avenger spinning reels feature precision elliptical gearing system and cyclonic flow rotor design that create less friction during casting for increased distance, greater accuracy, longer line life and minimize water intrusion and corrosion. Offer a wide size range that are suitable for different fish species and fishing methods.

**FEATURES**

- Multi-disc, Japanese oiled felt drag system
- 6BB + 1RB for ultimate smoothness and performance
- Quick-Set anti-reverse roller bearing
- Precision machine cut brass pinion gear
- Corrosion resistant graphite body and rotor
- CFR: Cyclonic Flow Rotor technology
- Precision Elliptical Gearing system



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136612	AV-500a	175 g	5.0:1	6+1	55 cm	3 kg	0.15/145, 0.20/80, 0.25/50	4718947038340
136613	AV-1000a	195 g	5.0:1	6+1	61 cm	3 kg	0.15/250, 0.20/140, 0.25/90	4718947046062
136614	AV-2500	224 g	5.0:1	6+1	66 cm	7 kg	0.20/230, 0.25/150, 0.30/105	4718947038357
136615	AV-3000	220 g	5.0:1	6+1	66 cm	7 kg	0.20/265, 0.25/170, 0.30/115	4718947038364
136616	AV-4000	283 g	5.0:1	6+1	76 cm	8 kg	0.25/260, 0.30/180, 0.35/135	4718947038371
136864	AV-6000	400 g	4.5:1	6+1	79 cm	15 kg	0.30/275, 0.35/200, 0.40/155	4718947038388
136865	AV-8000	572 g	4.8:1	6+1	97 cm	16 kg	0.40/210, 0.45/165, 0.50/135	4718947038395
136866	AV-10000	557 g	4.8:1	6+1	97 cm	16 kg	0.40/255, 0.45/200, 0.50/165	4718947038401
148146	AV-14000	109 g	4.8:1	6+1	109 cm	16 kg	0.40/370, 0.45/290, 0.50/230	4718947046703

**SPINNING - ALLROUND**

**SAFINA PRO**

Okuma Safina Pro Spinning Reel is with corrosion-resistant graphite body, featuring new graphite handle, quick-set infinite anti-reverse system and cyclonic flow rotor (CFR) that increases air flow through the ported rotor, increasing drying time and minimizing corrosion throughout the reel.

**FEATURES**

- Corrosion-resistant graphite body
- CFR : Cyclonic Flow Rotor
- 3 ball bearings + 1 roller bearing
- Quick-Set infinite anti-reverse system
- Machine cut brass pinion
- Precision elliptical oscillation
- ESII : Computer balanced Rotor Equalizing System
- Multi-disc, Japanese oiled felt drag washers
- Design rigid handle
- 2 tones aluminum spool
- New graphite handle
- T-shape handle knob from size 4000 and up



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136261	SNP-2500	224 g	5.0:1	3+1	66 cm	7 kg	0.20/230, 0.25/150, 0.30/105	4718947068514
136873	SNP-3000	219 g	5.0:1	3+1	66 cm	7 kg	0.20/265, 0.25/170, 0.30/115	4718947068521
136874	SNP-4000	282 g	5.0:1	3+1	76 cm	8 kg	0.25/260, 0.30/180, 0.35/135	4718947068538
136875	SNP-6000	410 g	4.5:1	3+1	79 cm	15 kg	0.30/275, 0.35/200, 0.40/155	4718947068545
136876	SNP-8000	570 g	4.8:1	3+1	97 cm	16 kg	0.40/210, 0.45/165, 0.50/135	4718947068552
136942	SNP-14000	599 g	4.8:1	3+1	109 cm	16 kg	0.40/370, 0.45/290, 0.50/230	4718947068569



SPINNING - ALLROUND

# SCORPIO

Okuma Scorpio Spinning Reel is with corrosion-resistant graphite body, featuring exclusive metal black and purple paint, quick set infinite anti-reverse system and cyclonic flow rotor (CFR) that increases air flow through the ported rotor, increasing drying time and minimizing corrosion throughout the reel.

### FEATURES

- Corrosion-resistant graphite body
- Exclusive metal black and purple paint
- 4 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- CFR : Cyclonic Flow Rotor
- Machine cut aluminum spool
- Graphite spare spool
- Smooth spool neck surface
- Corrosion-resistant graphite body
- Exclusive metal black and purple paint
- 4 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- CFR : Cyclonic Flow Rotor
- Machine cut aluminum spool
- Graphite spare spool
- Smooth spool neck surface



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>Scorpio</b>								
136855	SP1000-A	209 g	5.0:1	4+1	61 cm	3 kg	0.15/255, 0.20/140, 0.25/90	4718947067258
136856	SP3000-A	235 g	5.0:1	4+1	66 cm	7 kg	0.20/310, 0.25/200, 0.30/135	4718947067272
136857	SP4000-A	302 g	5.0:1	4+1	76 cm	8 kg	0.25/280, 0.30/185, 0.35/130	4718947067289
136587	SP5000-A	288 g	5.0:1	4+1	76 cm	8 kg	0.30/240, 0.35/170, 0.40/125	4718947067296
142257	SP6000-A	432 g	4.5:1	4+1	79 cm	15 kg	0.30/315, 0.35/220, 0.40/165	4718947067302
<b>Scorpio Shallow Spool</b>								
148185	SP1000S-A	218 g	5.0:1	4+1	61 cm	3 kg	PE0.4(0.104)-100m, PE0.6(0.128)-60m, PE0.8(0.148)-40m	4718947067241
142044	SP3000S-A	235 g	5.0:1	4+1	66 cm	7 kg	PE0.6(0.128)-210m, PE0.8(0.148)-150m, PE1.0(0.165)-125m	4718947067265





**SPINNING - ALLROUND**

# ALARIS

New to the Okuma family are the feature packed Alaris spinning reels. The Alaris reels feature a corrosion resistant frame, side plates and Cyclonic Flow Rotor design, as well as machined aluminum 2-tone spool and rigid metal handle for strength and durability. With four stainless steel ball bearings, and multi-disc Japanese oiled felt drag washers, the Alaris runs smooth on the output of line and retrieve. Available in three sizes, ALS-20, ALS-30, and ALS-40, the Alaris spinning reels are a great reel for freshwater and light inshore action

**FEATURES**

- Multi-disc, Japanese oiled felt drag washers
- 3 ball bearing + 1 roller bearing
- Quick-Set ant-reverse bearing
- Precision machine cut brass pinion gear
- Corrosion resistant graphite body and rotor
- Rigid metal handle design for strength
- Machined aluminum, 2-tone anodized spool with LCS lip
- Corrosion-resistant stainless steel bail wire
- RESII: Computer balanced Rotor Equalizing System



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136264	ALS-20	204 g	4.8:1	3+1	61 cm	5 kg	0.15/250, 0.20/140, 0.25/90	4718947023346
136265	ALS-30	237 g	5.0:1	3+1	71 cm	7 kg	0.20/300, 0.25/200, 0.30/130	4718947023353
136266	ALS-40	260 g	5.0:1	3+1	85 cm	8 kg	0.25/260, 0.30/180, 0.35/130	4718947023360
136885	ALS-45	295 g	5.0:1	3+1	79 cm	9 kg	0.30/240, 0.35/170, 0.40/125	4718947045713
136886	ALS-55	422 g	4.5:1	3+1	83 cm	14 kg	0.30/300, 0.35/220, 0.40/170	4718947036315
136887	ALS-65	427 g	4.5:1	3+1	87 cm	14 kg	0.40/220, 0.45/170, 0.50/140	4718947036322



**SPINNING - ALLROUND**

# ALTERA

Okuma Altera spinning reel brings together Okuma's latest body design, technology and strength. The reel features 3BB+1RB stainless steel bearings, anti-corrosive Cyclonic Flow Rotor Technology, and a rigid metal handle. A general purpose reel that delivers performance and excitement for pros and beginners alike.

**FEATURES**

- Multi-disc, Japanese oiled felt drag washers
- 3 ball bearing + 1 roller bearing
- Quick-Set ant-reverse bearing
- Precision machine cut brass pinion gear
- Corrosion resistant graphite body and rotor
- Rigid metal handle design for strength
- Machined aluminum, 2-tone anodized spool with LCS lip
- Corrosion-resistant stainless steel bail wire
- RESII: Computer balanced Rotor Equalizing System



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136267	ATE-20	204 g	4.8:1	3+1	61 cm	5 kg	0.15/250, 0.20/140, 0.25/90	4718947037688
136888	ATE-30	237 g	5.0:1	3+1	71 cm	7 kg	0.20/300, 0.25/200, 0.30/130	4718947037695
136889	ATE-40	260 g	5.0:1	3+1	85 cm	8 kg	0.25/260, 0.30/180, 0.35/130	4718947037701
136890	ATE-45	295 g	5.0:1	3+1	79 cm	9 kg	0.30/240, 0.35/170, 0.40/125	4718947045737
136629	ATE-55	430 g	4.5:1	3+1	83 cm	14 kg	0.30/300, 0.35/220, 0.40/170	4718947036360
136962	ATE-65	430 g	4.5:1	3+1	87 cm	14 kg	0.40/220, 0.45/170, 0.50/140	4718947036377



## SPINNING - ALLROUND





## SOLARIS

Okuma Solaris Spinning Reel equips with corrosion-resistant graphite body and metal handle, featuring 5 ball bearing + 1 roller bearing, aluminum black spool with blue anodizing, and quick set infinite anti-reverse system.

## FEATURES

- Corrosion-resistant graphite body
- 5 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- Aluminum black spool with blue anodizing
- Zink handle
- EVA knob 3000, Flat TPE knob C4000, TPE T-shape 5000/6000
- Machined cut brass pinion gear
- RESII: Computer-balanced rotor system
- Even Flow line roller



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136879	SLS-3000	240 g	5.0:1	5+1	71 cm	7 kg	0.20/300, 0.25/200, 0.30/130	4718947077721 
136881	SLS-5000	295 g	5.0:1	5+1	79 cm	9 kg	0.30/240, 0.35/170, 0.40/125	4718947077745 
136882	SLS-6000	430 g	4.5:1	5+1	83 cm	14 kg	0.30/300, 0.35/220, 0.40/170	4718947077752 
136880	SLS-C4000	260 g	5.0:1	5+1	85 cm	8 kg	0.25/260, 0.30/180, 0.35/130	4718947077738 

## SPINNING - ALLROUND






## JAW

Okuma Jaw spinning reels feature Okuma's latest body design, present fashion, technology and strength. Jaw not only focus on functions but also the appearance. The reel equips with 3BB+1RB stainless steel bearings, CFR(Cyclonic Flow Rotor Technology). Jaw is a reel for general purpose and the best choice for the beginners.

## FEATURES

- Multi-disc, Japanese oiled felt drag washers
- 3 ball bearing+1 roller bearing
- Precision machine cut brass pinion gear
- Corrosion resistant graphite body and rotor
- CFR: Cyclonic Flow Rotor technology
- Machined aluminum, anodized spool
- Corrosion-resistant stainless steel bail wire
- RESII: Computer balanced Rotor Equalizing System



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136883	JAW-20	204 g	4.8:1	3+1	61 cm	5 kg	0.15/250, 0.20/140, 0.25/90	4718947040381 
136301	JAW-30	237 g	5.0:1	3+1	71 cm	7 kg	0.20/300, 0.25/200, 0.30/130	4718947040398 
136884	JAW-40	260 g	5.0:1	3+1	85 cm	8 kg	0.25/260, 0.30/180, 0.35/130	4718947040404 
142033	JAW-45	295 g	5.0:1	3+1	79 cm	9 kg	0.30/240, 0.35/170, 0.40/125	4718947045720 
142034	JAW-55	422 g	4.5:1	3+1	83 cm	11 kg	0.30/300, 0.35/220, 0.40/170	4718947040411 

**SPINNING - ALLROUND**

**SAFINA**

Okuma Safina Spinning Reel is with Corrosion-resistant graphite body, featuring new graphite handle, quick-set infinite anti-reverse system and cyclonic flow rotor (CFR) that increases air flow through the ported rotor, increasing drying time and minimizing corrosion throughout the reel.

**FEATURES**

- Corrosion-resistant graphite body
- CFR : Cyclonic Flow Rotor
- 1 ball bearings + 1 roller bearing
- Quick-Set infinite anti-reverse system
- Machine cut brass pinion
- Precision elliptical oscillation
- ESII : Computer balanced Rotor Equalizing System
- Multi-disc, Japanese oiled felt drag washers
- Design rigid handle
- 2 tones aluminum spool
- New graphite handle
- T-shape handle knob from size 8000 and up



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136262	SN-2500	221 g	5.0:1	1+1	66 cm	7 kg	0.20/230, 0.25/150, 0.30/105	4718947068446
136877	SN-3000	217 g	5.0:1	1+1	66 cm	7 kg	0.20/265, 0.25/170, 0.30/115	4718947068453
136263	SN-4000	281 g	5.0:1	1+1	76 cm	8 kg	0.25/260, 0.30/180, 0.35/135	4718947068460
136878	SN-6000	398 g	4.5:1	1+1	79 cm	15 kg	0.30/275, 0.35/200, 0.40/155	4718947068477
148196	SN-8000	570 g	4.8:1	1+1	97 cm	16 kg	0.40/210, 0.45/165, 0.50/135	4718947068484
148197	SN-14000	598 g	4.8:1	1+1	109 cm	16 kg	0.40/370, 0.45/290, 0.50/230	4718947068491

**SPINNING - ALLROUND**

**AZAKI**

Okuma Azaki spinning reels feature Okuma's latest body design, present fashion, technology and strength. Azaki not only focus on functions but also the appearance. The reel equips with CFR(Cyclonic Flow Rotor Technology). Azaki is a reel for general purpose and the best choice for the beginners.

**FEATURES**

- Corrosion resistant graphite body and rotor
- 1+1 ball bearing
- Quick-set anti-reverse roller bearing
- Aluminum 2 tones anodized spool
- CFR: Cyclonic Flow Rotor technology
- Multi-disc, Japanese oiled felt drag washers
- RESII: Computer balanced Rotor Equalizing System
- TPE soft touch handle knob



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>Azaki</b>								
136268	Azaki-20	187 g	4.8:1	1+1	61 cm	5 kg	0.15/250, 0.20/140, 0.25/90	4718947036674
136302	Azaki-30	216 g	5.0:1	1+1	71 cm	7 kg	0.20/300, 0.25/200, 0.30/130	4718947036698
136303	Azaki-40	242 g	5.0:1	1+1	85 cm	8 kg	0.25/260, 0.30/180, 0.35/130	4718947036704
136891	Azaki-45	274 g	5.0:1	1+1	79 cm	9 kg	0.30/240, 0.35/170, 0.40/125	4718947045706
136892	Azaki-55	404 g	4.5:1	1+1	83 cm	14 kg	0.30/300, 0.35/220, 0.40/170	4718947036711
148140	Azaki-65	405 g	4.5:1	1+1	87 cm	14 kg	0.40/220, 0.45/170, 0.50/140	4718947038814
<b>Azaki With Braided Line</b>								
136963	Azaki-30 braided	216 g	5.0:1	1+1	71 cm	7 kg	0.20/300, 0.25/200, 0.30/130	4718947043061
136964	Azaki-40 braided	242 g	5.0:1	1+1	85 cm	8 kg	0.25/260, 0.30/180, 0.35/130	4718947043078



## SPINNING - ALLROUND

## PINK PEARL V2

Okuma Pink Pearl V2 Spinning Reels feature corrosion-resistant graphite body, TPE soft touch handle knob, and cyclonic flow rotor that allows for a much faster drying time if the reel becomes wet, minimizing corrosion and extending longevity of the reel.

## FEATURES

- Corrosion resistant graphite body and rotor
- 1+1 ball bearing
- Quick-set anti-reverse roller bearing
- Aluminum 2 tones anodized spool
- CFR: Cyclonic Flow Rotor technology
- Multi-disc, Japanese oiled felt drag washers
- RESII: Computer balanced Rotor Equalizing System
- TPE soft touch handle knob





Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136349	PP2-3000	216 g	5.0:1	1+1	71 cm	7 kg	0.2/300, 0.25/200, 0.3/130	4718947048202 

## SPINNING - ALLROUND

## CARBONITE RD

Corrosion resistant graphite body and rotor • 1+1 ball bearing • Quick-set anti-reverse roller bearing • Graphite spool • CFR: Cyclonic Flow Rotor technology • RESII: Computer balanced Rotor Equalizing System • TPE handle knob



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
142027	CR-2500	218 g	5.0:1	1+1	66 cm	4 kg	0.20/255, 0.25/170, 0.30/110	4718947048141 
142028	CR-4000	268 g	5.0:1	1+1	76 cm	6 kg	0.25/250, 0.30/170, 0.35/130	4718947048158 

**SPINNING - ALLROUND**

## REVENGER PRO

The Surf-8K long casting spinning reel was designed with the leading surf fisherman around the country. The Surf-8K features graphite rotor, side plates and frame for light weight feel and durability. The aluminum tapered spool gives minimal resistance for free line release creating extreme distance. Another key technology in the Surf-8K reel is the slow oscillation system. This slower oscillation system gives an exceptional line lay upon retrieve, and is optimized for use with braided line.

**FEATURES**

- Multi-disc, oiled felt drag system
- 1 ball bearing for ultimate smoothness
- Multi-stop anti-reverse system
- Graphite spool
- Corrosion-resistant graphite body
- Corrosion-resistant, stainless steel bail wire
- RESII: Computer balanced Rotor Equalizing System



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
142039	RVP-30	220 g	5.0:1	1	64.5 cm	6.8 kg	0.20/220, 0.25/140, 0.30/100	4718947141743
142040	RVP-40	260 g	5.0:1	1	76.2 cm	6.8 kg	0.25/270, 0.30/190, 0.35/140	4718947141750
148210	RVP-65	560 g	4.8:1	1	94 cm	11 kg	0.35/360, 0.40/280, 0.50/170	4718947142894
148211	RVP-80	586 g	4.8:1	1	104.1 cm	12 kg	0.45/280, 0.50/225, 0.55/190	4718947142900

**SPINNING - ALLROUND**

## REVENGER

Okuma Revenger spinning reels offer a wide size range that are suitable for different fish species and fishing methods, equip with multi-disc, oiled felt drag system, graphite spool.

**FEATURES**

- Multi-disc, oiled felt drag system
- 1 ball bearing for ultimate smoothness
- Multi-stop anti-reverse system
- Graphite spool
- Corrosion-resistant graphite body
- Corrosion-resistant, stainless steel bail wire
- RESII: Computer balanced Rotor Equalizing System



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136306	RV-30	215 g	5.0:1	1	64.5 cm	5 kg	0.20/220, 0.25/140, 0.30/100	4718947141712
136307	RV-40	250 g	5.0:1	1	76.2 cm	5 kg	0.25/270, 0.30/190, 0.35/140	4718947141729
141407	RV-55	365 g	4.5:1	1	76.2 cm	11.8 kg	0.30/390, 0.35/285, 0.40/220	4718947142917

## SPINNING - ALLROUND

## ARIA

New to the Okuma family are the Aria spinning reels. Performance at an unbeatable price point, all wrapped up into a compact body design. The Aria reels feature multi-disc Japanese oiled felt drag washers for a smooth output of line, as well as a one ball bearing drive for smoothness and durability. With its corrosion resistant graphite frame, side plates, and Cyclonic Flow Rotor, as well as machined aluminum anodized spool, the reel looks and feels sturdy.

## FEATURES

- Multi-disc, oiled felt drag washers
- 1 ball bearing drive for smoothness and durability
- Precision machine cut brass pinion gear
- Corrosion resistant body and rotor
- CFR: Cyclonic Flow Rotor technology
- Machined aluminum, anodized spool
- Corrosion-resistant stainless steel bail wire
- RESII: Computer balanced Rotor Equalizing System



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136596	ARIA-1000a	183 g	4.8:1	1BB	61 cm	5 kg	0.15/250, 0.20/140, 0.25/90	4718947078384
136271	ARIA-3000a	220 g	5.0:1	1BB	71 cm	7 kg	0.20/300, 0.25/200, 0.30/130	4718947078391
136305	ARIA-C4000a	234 g	5.0:1	1BB	85 cm	8 kg	0.25/260, 0.30/180, 0.35/130	4718947078407
136858	ARIA-5000a	266 g	5.0:1	1BB	79 cm	9 kg	0.30/240, 0.35/170, 0.40/125	4718947078414
136597	ARIA-6000a	375 g	4.5:1	1BB	83 cm	14 kg	0.30/300, 0.35/220, 0.40/170	4718947078421
136859	ARIA-8000a	380 g	4.5:1	1BB	87 cm	14 kg	0.40/220, 0.45/170, 0.50/140	4718947078438

## SPINNING - ALLROUND

## ELECTRON

Graphite body and rotor. • 1 ball bearing drive. • Graphite main and spare spool. • Smooth front drag system. • Free line included.



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136902	ELR-130	230 g	5.0:1	1BB	59 cm	3 kg	0.20/360 0.25/230 0.30/160	4718947132710
136903	ELR-140	315 g	4.5:1	1BB	58 cm	5 kg	5.0 0.30/270 0.35/200 0.40/150	4718947132727
136904	ELR-150	230 g	4.5:1	1BB	64 cm	5 kg	0.35/300 0.40/230 0.50/140	4718947132734
136900	ELC-165	495 g	4.8:1	1BB	91 cm		0.35/410 0.40/320 0.50/200	4718947132789
136901	ELC-180	555 g	4.8:1	1BB	102 cm	15 kg	0.45/320, 0.50/260, 0.55/220	4718947132796



**SPINNING - FEEDER**

## CUSTOM BLACK FEEDER

Okuma Custom Black feeder reels feature precision elliptical gearing system and cyclonic flow rotor design that create less friction during casting for increased distance, greater accuracy, longer line life and minimize water intrusion and corrosion. Equip with aluminum regular spare spool, rigid metal handle with EVA knob. The reel is dispatched with an extra aluminum spool.

**FEATURES**

- Corrosion-resistant graphite body
- 7 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- CFR : Cyclonic Flow Rotor
- Machine cut Aluminum shallow spool
- Aluminum regular spare spool
- Rigid metal handle, EVA knob
- Precision Elliptical Gearing System
- Machined cut brass pinion gear
- Heavy duty, solid aluminum bail wire
- RESII : Computer-balanced rotor system
- Even Flow line roller
- Multi-disc, Japanese oiled felt drag system



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136594	CLX-40F	297 g	5.0:1	7+1	76 cm	8 kg	0.25/180, 0.28/140, 0.30/125	4718947036667
136595	CLX-55F	437 g	4.5:1	7+1	79 cm	15 kg	0.30/180, 0.33/150, 0.35/130	4718947036681

**SPINNING - FEEDER**

## CARBONITE XP FEEDER

Okuma Carbonite XP feeder reels feature precision elliptical gearing system and cyclonic flow rotor design that create less friction during casting for increased distance, greater accuracy, longer line life and minimize water intrusion and corrosion. Equip with rigid metal handle with EVA knob. The reel is dispatched with an extra aluminum spool.

**FEATURES**

- Corrosion-resistant graphite body
- CFR : Cyclonic Flow Rotor
- 2 ball bearings + 1 roller bearing
- Quick-Set infinite anti-reverse system
- Aluminum 2 tone shallow spool
- Round metal line clip
- Rigid metal handle, EVA knob
- Precision Elliptical Gearing System
- Machined cut brass pinion gear
- RESII: Computer-balanced rotor system
- Even Flow line roller



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136588	CBV-40F	291 g	5.0:1	2+1	76 cm	8 kg	0.25/180, 0.28/140, 0.30/125	4718947036735
136589	CBV-55F	442 g	4.5:1	2+1	79 cm	15 kg	0.30/180, 0.33/150, 0.35/130	4718947036742

**SPINNING - MATCH**



## CEYMAR XT MATCH FD

Okuma Ceymar XT match FD reels feature precision elliptical gearing system and cyclonic flow rotor design that create less friction during casting for increased distance, greater accuracy, longer line life and minimize water intrusion and corrosion. Equip with aluminum regular spare spool, rigid metal handle with EVA knob. The reel is dispatched with an extra aluminum spool.

**FEATURES**

- Corrosion-resistant graphite body
- 7 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- CFR : Cyclonic Flow Rotor
- Aluminum 2 tone match spool
- Aluminum regular spare spool
- Rigid metal handle, EVA knob
- Precision Elliptical Gearing System
- Hi-speed gear ratio : 6,2:1
- Machined cut brass pinion gear
- Heavy duty, solid aluminum bail wire
- RESII: Computer-balanced rotor system
- Even Flow line roller
- Multi-disc, Japanese oiled felt drag system






Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136592	CXT-30MS	241 g	6.2:1	7+1	84 cm	7 kg	0.128/250, 0.148/150, 0.165/-130	4718947037084 
136593	CXT-40MS	301 g	6.2:1	7+1	97 cm	8 kg	0.165/170, 0.185/150, 0.205/120	4718947037091 

**SPINNING - MATCH**

## CARBONITE V2 MATCH BF FD & RD

Corrosion-resistant graphite body • CFR : Cyclonic Flow Rotor • 2 ball bearings + 1 roller bearing • Quick-Set infinite anti-reverse system • Aluminum 2 tone match spool • Round metal line clip • Regular graphite spare spool • Rigid metal double handle, EVA knob • Precision Elliptical Gearing System • Machined cut brass pinion gear • RESII: Computer-balanced rotor system • Even Flow line roller • Hi-speed gear ratio : 6,2:3



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>Carbonite V2 Match Front Drag</b>								
136625	CBV-40MS-DH	338 g	6.2:1	2+1	97 cm	8 kg	PE1.0(0.165mm)-170M, PE1.2(0.185mm)-150M, PE1.5(0.205mm)-120M	4718947037053 
<b>Carbonite V2 Match Rear Drag</b>								
136626	CBV-40MRS-DH	340 g	6.2:1	2+1	97 cm	8 kg	PE1.0(0.165mm)-170M, PE1.2(0.185mm)-150M, PE1.5(0.205mm)-120M	4718947037060 
<b>Carbonite V2 Match Baitfeeder</b>								
142019	CBV-40MBF	325 g	5.0:1	2+1	73 cm	6 kg	0.165/170, 0.185/150, 0.205/120	4718947037046 

**SPINNING - MATCH**


**CARBONITE MATCH**

Okuma Carbonite Match Spinning Reel is suitable for match fishing, featuring corrosion resistant graphite body and rotor, regular extra graphite spool, and EVA handle knob. It equips with CFR technology which allows for a much faster drying time if the reel becomes wet, minimizing corrosion and extending longevity of the reel.

**FEATURES**

- Corrosion resistant graphite body and rotor
- 1+1 ball bearing
- Quick-set anti-reverse roller bearing
- Match graphite spool
- Regular extra graphite spool
- CFR: Cyclonic Flow Rotor technology
- RESII: Computer balanced Rotor Equalizing System
- EVA handle knob



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136591	CRM-4000S	264 g	5.0:1	1+1	76 cm	6 kg	0.128/250, 0.148/150, 0.165/-130	4718947048165 







**BIG PIT  
REELS**



**BIG PIT - SURF**

**FLITE SURF**

The Flite Surf is designed for professional long casting and extremely light weight. Equipped with C-40X body and rotor, ultra-lightweight spool, screw-in handle and aluminum spool shaft for ultralightweight. Reduce wear and tear on fishing lines we designed a one-piece bail, and the other is a roller with a special DLC coating. All use HPB to achieve long-term corrosion resistance.

**FEATURES**

- 35mm stroke with super slow oscillation
- Light weight C-40X carbon frame and sideplates
- C-40X Cyclonic Flow Rotor for corrosion resistance
- One-Piece Bail
- Even Flow Roller System with DLC coating
- Frictionless main Shaft design
- Ultra-lightweight, A7075 aluminum shaft
- Ultra light Screw in handle
- Ultra light spool
- Rotor with tangle guard prevents line from entering the shaft
- Rotor brake system
- Carbon fiber drag system
- Fast progressive drag
- All HPB Bearing
- Worm shaft transmission system
- Comes with 2 spare spools (one aluminum and one red plastic)



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136560	FLS35-1500AY	472 g	4.3:1	8+1	103	18 kg	0.16/330, 0.18/260, 0.20/210	4718947074201

**BIG PIT - SURF**

**SURF 8K**

Developed with the top surf fishermen, the Surf 8K spinning reel is designed to give anglers the ultimate distance on each cast. The reel's tapered long stroke spool minimizes resistance, while the Slow Oscillation System further reduces friction when casting – and generates an exceptionally smooth line lay upon retrieve. To match the reel's casting capabilities, underneath the Surf 8K's light yet durable graphite body lies six stainless steel bearings and a quick-set anti-reverse for jaw-shattering hooksets. The rigid metal handle allows you to utilize the fast progressive drag system's 40 lbs of fish-stopping power to its full extent. Designed for maximum durability against corrosion, the Surf 8K features a Hydro Block gasket to protect the drag system, while the proprietary Cyclonic Flow Rotor Technology ushers all excess moisture out of the reel's housing with a cyclone-like airflow.

**FEATURES**

- Quick-set anti reverse roller bearing
- Slow oscillation system
- Fast drag system
- Double stainless steel line clickers
- Precision worm shaft transmission system
- Rotor brake system
- Hydro Block water tight drag seal
- With carbon washers
- Precision zinc handle arm with TPE ergo grip



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136562	SURF-8K	750 g	4.7:1	5+1	108 cm	18 kg	0.33/620, 0.35/550, 0.38/470	4718947028358

**NEW**



**okuma**  
BIG PIT REELS



RED = New 2023

## BIG PIT - SURF



## ROCKAWAY

The Rockaway Surf Reels and Rockaway Baitfeeder Reel is designed to complement our Rockaway Surf Rods. Featuring a long cast spool design and lightweight corrosion-resistant body, the Rockaway Spinning models are equipped with 4BB + 1RB stainless steel bearing, and a 5.3:1 gear ratio, and puts out 26 and 35 lbs max drag. The Rockaway Baitfeeder (RBF) model features Okumas On/Off Baitfeeding system. It also features a 5.3:1 gear ratio, 5BB+1RB, and 35 lbs max drag. All models feature a rigid metal handle design to reduce flex, and cyclonic flow rotor technology.

## FEATURES

- 4BB + 1RB stainless steel bearing system
- Quick-Set anti-reverse roller bearing
- Precision machine cut brass pinion gear
- Corrosion resistant frame, sideplate and rotor
- Rigid metal handle design to reduce flex
- Long cast, 2-tone anodized aluminum spool



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136847	RA-6000	486 g	5.3:1	4+1BB	104 cm	12 kg	0.30/370, 0.33/300, 0.35/270	4718947043467 
137436	RA-8000	531 g	5.3:1	4+1	123 cm	16 kg	0.33/440, 0.35/385, 0.38/320	4718947077493 

## BIG PIT - SURF



## DISTANCE SURF ARENA

Okuma Distance Surf Arena spinning reels feature round metal line clip, fast progressive drag, worm shaft transmission system.

## FEATURES

- Slim Blade corrosion-resistant graphite body
- 3 ball bearings + 1 roller bearing
- Quick-set infinite anti-reverse system
- Machine-cut aluminum spool
- LCS: round metal line clip
- FPD: Fast Progressive Drag
- Rigid metal handle
- TPE T-Shape handle knob
- Worm Shaft transmission system
- Even Flow line roller
- Hydro Block water-tight drag seal



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136564	DSA-60	578 g	4.5:1	3+1	103 cm	16 kg	0.33/320, 0.35/280, 0.38/240	4718947036520 
136845	DSA-80	673 g	3.8:1	3+1	92 cm	16 kg	0.33/390, 0.35/345, 0.38/295	4718947036537 


## OBSIDIAN

An extremely lightweight carp reel, the Obsidian is made with Okuma's C-40X carbon – the durable yet light graphite. The light and ergonomic feel is perfected by the ultralight spool and the frictionless main shaft design that eliminates resistance when reeling. Obsidian's super-slow oscillation, one-piece bail, and worm shaft transmission ensure exceptional line lay and superb casting.

### FEATURES

- 35mm Stroke Spool with Super-Slow Oscillation
- Lightweight C-40X Carbon Frame & Side Plate
- C-40X Construction & Cyclonic Flow Rotor For Corrosion Resistance
- Ultralight Screw-In Handle
- Ultralight Spool
- Even Flow Roller System with DLC Coating
- Frictionless Main Shaft Design
- Ultra-lightweight A7075 Aluminum Shaft
- Rotor with Tangle Guard Prevents Line from Entering the Shaft
- Rotor Brake System
- Carbon Fiber Drag System
- Fast Progressive Drag
- Worm Shaft Transmission System
- One-Piece Bail
- Comes with Spare Aluminum Spool and 2 Line Reducer Adaptors



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
● 142184	OSD12000-35AY	520 g	4.3:1	8+1	103 cm	18 kg	0.33/680, 0.35/600, 0.38/500	4718947089496 


## T-REX

Okuma T-Rex Spinning Reel is designed by crossover construction and the handle is forged aluminum with wooden knob. It equips with solid reel system, worm shaft transmission system, fast progressive drag, and LCS line control spool that makes casting smoother.

### FEATURES

- SRS : Solid Reel System
- Crossover Construction design
- Quick-Set anti-reverse roller bearing
- Worm shaft transmission system
- Precision machine cut brass pinion gear
- LCS : Line Control Spool for longer casting distance
- Fast Progressive Drag System
- Multi disc, Japanese oiled felt drag system
- Forged aluminum handle with wooden knob
- Hydro Block water tight drag seal
- Heavy duty, solid aluminum, anodized bail wire
- RESII: Computer balanced Rotor Equalizing System
- Aluminum spool
- Round metal line clip



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136563	TR-7000	616 g	4.5:1	6+1	102 cm	12 kg	0.33/370, 0.35/325, 0.38/270	4718947046697 

## BIG PIT - CARP


## 8K

The new standard for big pit carp reels. With its large-diameter spool and the Slow Oscillation System, Okuma's ultra-durable 8K spinning reel delivers incredible casting distance while ensuring a peerlessly smooth operation. Built for bulletproof endurance, the 8K's large bail arm and spool are both made from solid aluminum. The reel's fast progressive drag system boasts 18 kg of stopping power, making it the ideal companion for targeting big fish on big waters. For maximum anti-corrosion endurance, the 8K's Hydro Block technology seals the reel's drag system in a water-tight enclosure, while the Cyclonic Flow Rotor Technology ushers all excess moisture out of the reel's housing with a cyclone-like airflow. The 8K is finished with a tasteful black design and a weighted wooden handle knob that rests in a vertical position – always lining up perfectly.

## FEATURES

- Quick-set anti-reverse roller bearing
- Slow oscillation system
- 5 ball bearings + 1 roller bearing
- Fast drag system
- Double stainless steel line clickers
- Precision Worm Shaft Transmission system
- Rotor brake system
- Hydro Block water-tight drag seal
- With carbon washers
- Precision zinc handle arm with wooden knob



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136947	8K	750 g	4.7:1	5+1	108 cm	18 kg	0.33/620, 0.35/550, 0.38/470	4718947028334 

## BIG PIT - CARP


## INC

Ultra-durability coupled with exceptional reliability and performance – Okuma's Inception is the carp reel to exceed your expectations. Available in sizes 6000 and 8000, the robust yet compact INC is built to last for years of rigorous use. The INC is fitted with oversized gearing for impressive cranking power, complemented by the spinning reel's fast progressive drag system. With a long stroke spool and the super-slow Worm Shaft Transmission System to reduce friction, the INC casts smooth, accurately – and with power. The sealed, corrosion-resistant graphite body is coupled with the proprietary Cyclonic Flow Rotor Technology that ushers all excess moisture from the reel's housing with a cyclone-like airflow. The INC is finished with a tasteful black design and a weighted wooden handle knob that rests in a vertical position – always lining up perfectly.

## FEATURES

- Compact body
- Long Stroke spool 30mm
- Corrosion-resistant graphite body
- 3 ball bearing + 1 roller bearing
- Quick-Set infinite anti-reverse system
- Machine-cut aluminum spool
- 2 round metal line clips
- Rigid metal handle with wooden knob
- Worm shaft oscillation system
- Machine-cut brass pinion gear
- Heavy-duty, solid aluminum bail wire
- RESII: Computer-balanced rotor system
- Even Flow line roller
- Rotor brake system
- Fast progressive drag



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136561	INC-6000	460 g	5.3:1	3+1	104 cm	12 kg	0.30/370, 0.33/300, 0.35/270	4718947040374 
148186	INC-8000	533 g	5.3:1	3+1	123 cm	16 kg	0.33/440, 0.35/385, 0.38/320	4718947067319 



**BIG PIT - CARP**

**CUSTOM BLACK**

From running large carps to tackling hard-fighting pikes, the Custom Black delivers both durability and performance – in a sublime matte black design. With the Even Flow Roller II technology to ensure exceptional line-lay and the Worm Shaft Transmission system to reduce friction on the line, the Custom Black casts smooth and accurately. And when it's time to play the fish, the spinning reel's fast progressive drag system takes you from locked-up to free-flowing in just a couple of clicks. For long-lasting durability, the Custom Black features a machine-cut black aluminum spool and a Hydro Block gasket to keep the reel corrosion-free. Available in sizes 6000 and 8000, the Custom Black is finished with a weighted wooden handle knob that rests in a vertical position – always lining up perfectly.



**FEATURES**

- 3+1 stainless steel bearings
- Quick-Set anti-reverse roller bearing
- Machine-cut anodizing alum spool
- Aluminum regular handle for CB-60/80; one touch handle for CB-60 QF
- Hydro Block system
- Even Flow Roller
- Worm Shaft Transmission system
- LCS line control spool
- Metal line clip
- Spare graphite spool



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136846	CB-60	570 g	4.5:1	3+1	102.9 cm	12 kg	0.25/515, 0.30/360, 0.35/270, 0.40/210	4718947013620
136565	CB-80	690 g	3.8:1	3+1	92.5 cm	15 kg	0.40/265, 0.45/210, 0.50/170, 0.55/135	4718947021830




**BIG PIT - CARP**

**BIG BOMBER SPOD**

Graphite body construction • BBD : body blade design • 3+1 ball bearings • Quick-Set anti reverse roller bearing • Machine cut anodized aluminum spool • 2 round metal line-clips • Hard metal handle • TPE Ergo grip handle knob • XXL Even flow roller • Worm shaft transmission system • FPD : Fast Progressive Drag System • Heavy duty, solid aluminum, anodized bail wire • RESII: Computer balanced Rotor Equalizing System




Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
142010	BBS-8000S	720 g	5.1:1	3+1	128 cm	16 kg	0.20/410, 0.22/340, 0.25/270	4718947047670 

**BIG PIT - CARP**

**CUSTOM CARP**

Slim Blade corrosion-resistant graphite body • 3 ball bearing + 1 roller bearing • Quick Set infinite anti-reverse system • Machine cut aluminum spool • Metal round line clip • Graphite spare spool • FPD : Fast Progressive Drag • Quick folding alu handle • Wooden handle knob • Worm Shaft transmission system • Even Flow line roller • Hydro block drag system



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
142020	CC-7000	601 g	4.5:1	3+1	103 cm	12 kg	270/0.35	4718947067395 

**BIG PIT - CARP**

**CUSTOM**

Corrosion resistant graphite body and rotor • 3 ball bearings + 1 roller bearing • Quick-Set infinite anti-reverse system • Aluminum anodized spool • Graphite spare spool • CFR : Cyclonic Flow Rotor • 2 round metal line clips • Multi-disc, Japanese oiled felt drag washers • RESII: Computer balanced Rotor Equalizing System • EFR II : Even Flow Line Roller • Soft touch ABS T-shape handle knob • Spod version CS : Prespooled with 200m Braid 30 lbs




Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>Custom</b>								
142014	C-7000	622 g	4.8:1	3+1	107 cm	16 kg	0.33/370, 0.35/325, 0.38/270	4718947067418 
<b>Custom Spod</b>								
142029	CS-7000S	665 g	4.8:1	3+1	107 cm	16 kg	0.20/410, 0.22/340, 0.25/270	4718947069191 

## BIG PIT - CARP

### ATOMIC CARP

Corrosion resistant graphite body and rotor • Multi-stop anti-reverse system • Aluminum anodized spool • Multi-disc, Japanese oiled felt drag washers • RESII: Computer balanced Rotor Equalizing System • EFR II : Even Flow Line Roller • ABS T-shape handle knob



Product Number	Model	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
142005	ATC-7000	4.5:1	3	103 cm	15 kg	0.33/370, 0.35/325, 0.38/270	4718947048127 

## BIG PIT - CARP

### C-FIGHT

Corrosion-resistant graphite body and rotor • Exclusive Okuma black and grey camo covering • 3 ball bearing + 1 roller bearing • Quick-Set infinite anti-reverse system • Machine cut brass pinion gear • Machine cut 2 tone anodized aluminum spool • RES II : Computer balanced Rotor Equalizing System • Rigid metal handle • TPE T-shape handle knob • Multi-disc, Japanese oiled felt drag washers



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
148161	CF-6000	460 g	4.5:1	3+1	87 cm	14 kg	0.30/320, 0.35/225, 0.40/170	4718947051158 







# BAITFEEDER REELS



**SPINNING - BAITFEEDER**

**LS**

Okuma LS reel is designed for long casting carp fishing, features on/off auto trip bait feeding system, slow oscillation system with long stroke spool trip 30mm and worm shaft transmission system make casting smoother and longer. Equips with oversized gear and fast progressive drag system in a compact body design to bring anglers better fishing experience. With the model LS-6K and LS-8K.

**FEATURES**

- Auto-switch freespool system
- Long Stroke spool trip 30mm
- Corrosion-resistant graphite body
- 5 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- Machine cut aluminum spool
- Worm shaft oscillation system
- Machined cut brass pinion gear
- Heavy duty, solid aluminum bail wire
- Precision zinc handle arm with wooden handle knob
- RESII: Computer-balanced rotor system
- Slow oscillation system for improved line lay
- 2 round metal line clips
- Rotor brake system
- Fast progressive drag
- Metal air bail nut



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136578	LS-6K	530 g	5.3:1	5+1	104 cm	12 kg	0.30/370, 0.33/300, 0.35/270	4718947036421
136579	LS-8K	588 g	5.3:1	5+1	123 cm	16 kg	0.33/440, 0.35/385, 0.38/320	4718947065698

**SPINNING - BAITFEEDER**

**AVENTA BF**

Okuma Aventa Baitfeeder spinning reels feature on/off auto trip bait feeding system allows anglers to disengage their spinning reel spool and allow their bait to run freely. Slow Oscillation System can improve line lay. Equip with one touch handle with wood knob. An extra aluminum spool can be a back-up system or for carrying different line sizes.

**FEATURES**

- On/Off auto trip bait feeding system
- 6+1RB bearing drive system for smoothness
- Quick set anti-reverse roller bearing
- Precision machine cut brass pinion gear
- Corrosion resistant graphite body
- Slow oscillation precision gearing system
- Machined aluminum spool
- Metal line clip
- Spare aluminum spool
- One touch handle with wood knob
- LCS Line control spool



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136567	AB-5000	527 g	4.8:1	6+1	68.6 cm	12 kg	0.35/235, 0.40/180, 0.50/110	4718947017154
136568	AB-6000	533 g	4.8:1	6+1	71.1 cm	12 kg	0.35/280, 0.40/215, 0.50/135	4718947016768
136569	AB-8000	763 g	4.8:1	6+1	78.7 cm	15 kg	0.35/405, 0.40/311, 0.50/190	4718947017185
136570	AB-10000	778 g	4.8:1	6+1	86.4 cm	15 kg	0.45/310, 0.50/250, 0.55/210	4718947017192

**SPINNING - BAITFEEDER**


**ROCKAWAY**

The Rockaway Surf Reels and Rockaway Baitfeeder Reel is designed to complement our Rockaway Surf Rods. Featuring a long cast spool design and lightweight corrosion-resistant body, the Rockaway Spinning models are equipped with 4BB + 1RB stainless steel bearing, and a 5.3:1 gear ratio, and puts out 26 and 35 lbs max drag. The Rockaway Baitfeeder (RBF) model features Okumas On/Off Baitfeeding system. It also features a 5.3:1 gear ratio, 5BB+1RB, and 35 lbs max drag. All models feature a rigid metal handle design to reduce flex, and cyclonic flow rotor technology.

**FEATURES**

- Quick-Set anti-reverse roller bearing
- 5.3:1 gear ration with 123 cm of line pickup
- Precision machine cut brass pinion gear
- CFR: Cyclonic Flow Rotor technology
- Corrosion resistant frame, sideplate & rotor
- Rigid metal handle design to reduce flex
- Long cast, 2-tone anodized aluminum spool
- On/Off auto trip baitfeeding system
- 5BB + 1RB stainless steel bearing system



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136566	RBF-8000	586 g	5.3:1	5+1BB	123 cm	16 kg	0.33/440, 0.35/385, 0.38/320	4718947077400 

**SPINNING - BAITFEEDER**

**Longbow XT BF**

Okuma Longbow XT Baitfeeder spinning reels feature on/off auto trip bait feeding system allows anglers to disengage their spinning reel spool and allow their bait to run freely. The precision elliptical gearing system creates less friction during casting for increased distance, greater accuracy, and longer line life, as well as smoother, much uniform drag pressures. Equip with LCS line control spool makes casting smoother. The reel is suitable for carp fishing and dispatched with an extra graphite spool.

**FEATURES**

- On/Off auto trip bait feeding system
- Multi-disc, oiled felt drag system
- 5+1BB bearing drive system for smoothness
- Multi-stop anti-reverse system
- Corrosion-resistant graphite body
- Precision Elliptical Gearing system
- Machined aluminum anodized spool
- RESII: Computer balanced Rotor Equalizing System
- Metal line clip
- Spare graphite spool
- LCS line control spool



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136848	LBXT-630	232 g	5.0:1	5+1	63.5 cm	3 kg	0.20/240, 0.25/155, 0.30/110	4718947015594 
136849	LBXT-640	283 g	5.0:1	5+1	73.7 cm	6 kg	0.25/300, 0.30/210, 0.35/155	4718947015600 
136573	LBXT-655	403 g	4.5:1	5+1	76.2 cm	9 kg	0.30/380, 0.35/280, 0.40/215	4718947015617 
136850	LBXT-665	586 g	4.8:1	5+1	91.4 cm	11 kg	0.35/390, 0.40/300, 0.50/185	4718947015624 

**SPINNING - BAITFEEDER**

**TOMCAT BAITFEEDER**

Okuma Tomcat Baitfeeder Spinning Reel is designed for catfish fishing. It features auto-switch freespool system, largest line capacity Okuma freespool reel, corrosion-resistant graphite body, rigid metal handle and TPE ergo grip handle knob.

**FEATURES**

- Auto-switch freespool system
- Largest line capacity Okuma freespool reel
- Designed for Catfish fishing
- Corrosion-resistant graphite body
- 5 ball bearings + 1 roller bearing
- Quick-Set infinite anti-reverse system
- S-curve oscillation system
- 2 tones machine cut aluminum spool
- Gunsmoke anodized bail
- Multi-disc, Japanese oiled felt drag washers
- Rigid metal handle
- TPE ergo grip handle knob
- Machine cut brass pinion



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136574	TCBF-18000	820 g	4.5:1	5+1	106 cm	10 kg	0.50/320, 0.55/260, 0.60/215	4718947052438

**SPINNING - BAITFEEDER**

**CEYMAR BF**

Okuma Ceymar baitfeeder spinning reels feature baitfeeder quick release aluminum spool, multi-disc, oiled felt drag system, and cyclonic flow rotor design increases air flow through the ported rotor, minimizing water intrusion and corrosion. Equip with heavy duty solid aluminum bail wire.

**FEATURES**

- Baitfeeder quick release Aluminum spool
- Multi-disc, oiled felt drag system
- RESII: Computer balanced Rotor Equalizing System
- 2+1BB bearing drive system
- Quick-Set anti-reverse roller bearing
- Precision machine cut brass pinion gear
- Corrosion-resistant graphite body
- Light weight, ABS handle knobs
- Precision Elliptical Gearing system
- Machined aluminum, anodized spool
- Metal line clip
- LCS line control spool
- Extra graphite spool






Product Number	Model	Weight	Gear Ratio	Bearings	Max Drag	Line Capacity	Barcode
136851	CMBF-330	232 g	5.0:1	2+1	3 kg	0.20/240, 0.25/155, 0.30/110	4718947016232
136575	CMBF-340	283 g	5.0:1	2+1	6 kg	0.25/300, 0.30/210, 0.35/155	4718947016249
136576	CMBF-355	403 g	4.5:1	2+1	9 kg	0.30/380, 0.35/280, 0.40/215	4718947016256
136577	CMBF-365	586 g	4.8:1	2+1	11 kg	0.35/390, 0.40/300, 0.50/185	4718947016263

**SPINNING - BAITFEEDER**

**PULZAR BF**

Auto-switch freespool system • Corrosion-resistant graphite body • 5 ball bearing + 1 roller bearing • Quick Set infinite anti-reverse system • Machine cut aluminum spool • Round metal line clip • Graphite spare spool • Easy folding aluminum handle • Wooden handle knob • S-curve oscillation system • Machined cut brass pinion gear • Heavy duty, solid aluminum bail wire • RESII: Computer-balanced rotor system • Even Flow line roller



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
148135	PZB-4000	333 g	5.0:1	5+1	79 cm	10 kg	0.25/260, 0.30/180, 0.35/130	4718947036629 
148136	PZB-6000	493 g	4.5:1	5+1	80 cm	12 kg	0.30/300, 0.35/220, 0.40/170	4718947036643 
148137	PZB-7000	523 g	4.5:1	5+1	87 cm	12 kg	0.40/195, 0.45/150, 0.50/125	4718947036650 





**SPINNING - BAITFEEDER**

**BARBARIAN BAITFEEDER**

ON/OFF auto trip bait feeder system • Multi-disc, Japanese oiled felt drag washers • 2BB+1RB stainless steel bearings • Quick-Set ant-reverse bearing • Precision machine cut brass pinion gear • Corrosion resistant graphite body and rotor • Machined aluminum, spool • Heavy duty solid aluminum bail wire • RESII: Computer balanced Rotor Equalizing System • Aluminum double handle



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
142011	BN-40	351 g	5.0:1	2+1	76.3 cm	6.8 kg	0.25/290, 0.30/200, 0.35/150	4718947023148
142012	BN-55	464 g	4.5:1	2+1	79.1 cm	13.4 kg	0.30/300, 0.35/220, 0.40/170	4718947023155

**SPINNING - BAITFEEDER**

**DYNA DRAG XP FB**

Okuma Dyna Drag XP baitfeeder spinning reels feature on/off auto trip bait feeding system allows anglers to disengage their spinning reel spool and allow their bait to run freely, cyclonic flow rotor design increases air flow through the ported rotor, minimizing water intrusion and corrosion. The reel is dispatched with an extra spool.



**FEATURES**

- Auto-switch freespool system
- Corrosion-resistant graphite body
- 3 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- Machine cut aluminum spool
- S-curve oscillation system
- Machined cut brass pinion gear
- RESII: Computer-balanced rotor system
- Even Flow line roller
- Round metal line clip
- Graphite spare spool
- Rigid metal handle
- T-shape TPE knob



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136852	DAXP-1000	228 g	5.0:1	3+1	61 cm	3 kg	0.15/250, 0.20/140, 0.25/90	4718947045560
136584	DAXP-3000	280 g	5.0:1	3+1	71 cm	8 kg	0.20/310, 0.25/200, 0.30/135	4718947046048
136623	DAXP-4000	331 g	5.0:1	3+1	79 cm	10 kg	0.25/260, 0.30/180, 0.35/130	4718947036582
136624	DAXP-6000	482 g	4.5:1	3+1	80 cm	12 kg	0.30/300, 0.35/220, 0.40/170	4718947036605
136946	DAXP-7000	509 g	4.5:1	3+1	87 cm	12 kg	0.40/195, 0.45/150, 0.50/125	4718947036612

**SPINNING - BAITFEEDER**

**POWERLINER PRO**

On/Off auto trip bait feeding system • Multi-disc, oiled felt drag system • 4+1BB bearing drive system for smoothness • Multi-stop anti-reverse system • Corrosion-resistant graphite body • Precision Elliptical Gearing system • Machined aluminum, anodized spool • Durable stainless steel bail wire • RESII: Computer balanced Rotor Equalizing System • Metal line clip • Spare graphite spool



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
148187	PLP-6000	669 g	4.5:1	4+1	102 cm	15 kg	0.30/390, 0.33/315, 0.35/280	4718947067630
148188	PLP-8000	683 g	4.5:1	4+1	102 cm	16 kg	0.33/440, 0.35/385, 0.38/320	4718947067647

**SPINNING - BAITFEEDER**

**AK BF**

Okuma AK baitfeeder spinning reels feature on/off auto trip bait feeding system allows anglers to disengage their spinning reel spool and allow their bait to run freely, cyclonic flow rotor design increases air flow through the ported rotor, minimizing water intrusion and corrosion. Equip with aluminum spool. The reel is dispatched with an extra spool.



**FEATURES**

- Auto-switch freespool system
- Corrosion-resistant graphite body
- 1 ball bearing + 1 roller bearing
- Quick Set infinite anti-reverse system
- CFR : Cyclonic Flow Rotor
- Aluminum spool
- Design graphite handle
- ABS knob
- S-curve oscillation system
- Machined cut brass pinion gear
- RESII: Computer-balanced rotor system
- Even Flow line roller
- Graphite spare spool



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136944	AK-4000	304 g	5.0:1	1+1	79 cm	10 kg	0.25/260, 0.30/180, 0.35/130	4718947036438
136956	AK-5000	458 g	4.5:1	1+1	80 cm	12 kg	0.30/230, 0.35/170, 0.40/130	4718947036445
142003	AK-6000	445 g	4.5:1	1+1	80 cm	12 kg	0.30/300, 0.35/220, 0.40/170	4718947043641

**SPINNING - BAITFEEDER**



**CARBONITE B-FEEDER**

Okuma Carbonite B-Feeder Spinning Reel features auto-switch freespool system, corrosion-resistant graphite body, and quick set infinite anti-reverse system.

**FEATURES**

- Auto-switch freespool system
- Corrosion-resistant graphite body
- 1ball bearing +1 roller bearing
- Quick Set infinite anti-reverse system
- Multi-disc, oiled felt drag system
- Graphite painted spool
- Graphite spare spool
- S-curve oscillation system
- Machined cut brass pinion gear
- RESII: Computer-balanced rotor system
- Even Flow line roller



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136585	CBBF-4000	285 g	5.0:1	1+1	79 cm	8 kg	0.25/250, 0.30/165, 0.35/115	4718947067364 
136586	CBBF-5000	396 g	4.5:1	1+1	79 cm	12 kg	0.30/275, 0.35/195, 0.40/145	4718947067371 



**SPINNING - BAITFEEDER**



**CARBONITE XP**

Okuma Carbonite XP Baitfeeder spinning reels equip on/off auto trip bait feeding system allows anglers to disengage their spinning reel spool and allow their bait to run freely. The precision elliptical gearing system creates less friction during casting for increased distance, greater accuracy, and longer line life, as well as smoother, much uniform drag pressures. The reel is dispatched with an extra spool and green line, an ideal choice to start baitfeeder fishing.

**FEATURES**

- Baitfeeder quick release graphite spool
- Graphite spool
- With green line
- 1BB bearing drive system
- Precision Elliptical Gearing System
- Plastic line clip
- Spare graphite spool
- Machined cut brass pinion gear
- RESII: Computer balanced Rotor System
- Even flow roller



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136853	CBF-140a	280 g	5.0:1	1	71.6 cm	6 kg	0.30/170, 0.35/130, 0.40/100	4718947015631 
136854	CBF-155a	400 g	4.5:1	1	75.7 cm	9 kg	0.35/260, 0.40/200, 0.50/120	4718947015648 







# BAITCAST REELS

**BAITCASTING**





**KOMODO SS**

Komodo reels, featuring stainless steel gearing and drive shafts, along with amazing levels of drag output, take on the largest freshwater fish like pike and salmon, along with the toughest inshore species like bass with a level of power and durability that is best in their class. The selection includes two sizes, with options in gear ratios and handles to deliver the perfect reel for your big fish applications.

**FEATURES**

- Stainless steel main gear for ultimate power and strength
- Precision machine-cut stainless steel pinion gear
- Heavy-duty stainless steel drive and spool shafts
- ALC: Rigid diecast aluminum frame and gear sideplate
- CRC: Corrosion-Resistant Coating process
- A6061-T6 machined aluminum, anodized spool
- Multi-disc high output Carbonite drag system
- Micro-click drag star for precise drag settings
- 350 size: 6HPB+1RB corrosion resistant stainless steel bearings
- 450 size: 7HPB+1RB corrosion-resistant stainless steel bearings
- Precision Japanese ABEC-5 spool bearings
- Dual anti-reverse for maximum reliability
- Quick-Set anti-reverse roller bearing
- 6-pin Velocity Control casting system
- Synchronized levelwind optimized for braided line
- Zirconium line guide inserts for use with braided line
- Available in both right and left hand retrieve
- On/Off clicker for trolling, chunking or bait fishing from size 300 and up



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>Komodo SS Lowprofiles Left Handed Baitcast Reels</b>								
136502	KDS-273LX	221 g	7.3:1	6HPB+1RB	80 cm	9 kg	0.29/205, 0.33/160, 0.37/125	4718947040664 
136205	KDS-364LX	310 g	6.4:1	6HPB+1RB	78.7 cm	11 kg	0.33/250, 0.37/230, 0.41/150	4718947018854 
136504	KDS-463LX	453 g	6.3:1	7HPB+1RB	85.1 cm	14 kg	0.37/265, 0.42/200, 0.55/115	4718947016782 
<b>Komodo SS Lowprofiles Right Handed Baitcast Reels</b>								
136501	KDS-364	310 g	6.4:1	6+1	78 cm	11 kg	0.33/250, 0.37/230, 0.41/150	4718947018847 



**BAITCASTING**

**CITRIX**

Okuma Citrix 350-size low profile reels are designed with rigid diecast aluminum frame and handle side plate provide more precise tolerances for precision gear alignment, maximum cast ability and ultimate durability. Multi-disc carbonite drag system that outputs 11 kg of maximum drag.

**FEATURES**

- ALC: Rigid diecast aluminum frame and handle side plate
- A6061-T6 machined aluminum, anodized V-shaped spool
- Multi-disc Carbonite drag system
- 7BB+1RB bearings drive system
- Micro-click drag star for precise drag settings
- External adjustable centrifugal cast control system
- Quick-Set anti-reverse roller bearing
- Zirconium line guide inserts for use with braided line
- Easy change palm side plate access port
- Ergonomic handle design allows cranking closer to body
- 6.4:1 gear ratio available in left hand retrieve
- Graphite sideplates
- Available gear ratios: 6.4:1



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136505	Ci-364LXa	312 g	6.4:1	7+1	79 cm	11 kg	0.33/250, 0.37/230, 0.41/150	4718947215888 



**BAITCASTING**

## SERRANO

Okuma's new Serrano reels feature a lightweight, corrosion-resistant graphite body and side plates and are designed with a new, more compact body, all fitting nicely in the palm of your hand. The Serrano features a 6BB + 1RB precision stainless steel bearing drive system for long, smooth casting and the Quick-Set anti-reverse bearing bodes well for solid hook-sets. The precision-cut, high-strength brass main and pinion gears are smooth-running and very durable. The Serrano has plenty of stopping power with multi-disc drag washers for consistent performance.



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136551	SRN100H-A	199 g	7.2:1	6+1	76 cm	5 kg	0.31/110, 0.33/100, 0.37/80	4718947065704
136550	SRN101-A	199 g	6.5:1	6+1	68 cm	5 kg	0.31/110, 0.33/100, 0.37/80	4718947065735
136552	SRN101H-A	199 g	7.2:1	6+1	76 cm	5 kg	0.31/110, 0.33/100, 0.37/80	4718947070302

**BAITCASTING**

## CEYMAR

Okuma Ceymar Low Profile Baitcast Reel equips with corrosion-resistant graphite frame and sideplates, and A6061-T6 machined aluminum spool. It also features multi-disc composite drag system and sideplate access port which can change the spool quickly.

**FEATURES**

- Corrosion-resistant graphite frame and sideplates
- A6061-T6 machined aluminum, anodized U-shaped spool
- Multi-disc composite drag system
- 5BB+1RB bearing drive system
- External adjustable magnetic cast control system
- Quick-Set anti-reverse roller bearing
- Sideplate access port for quick spool changes
- Ergonomic handle design allows cranking closer to body



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136556	C101-A	199 g	6.5:1	5+1	68 cm	5 kg	0.31/110, 0.33/100, 0.37/80	4718947069504
136242	C101H-A	199 g	7.2:1	5+1	76 cm	5 kg	0.31/110, 0.33/100, 0.37/80	4718947069511
136241	C100H-A	199 g	7.2:1	5+1	76 cm	5 kg	0.31/110, 0.33/100, 0.37/80	4718947069498

**BAITCASTING**

## JAW

Okuma Jaw spinning reels feature Okuma's latest body design, present fashion, technology and strength. Jaw not only focus on functions but also the appearance. The reel equips with 3BB+1RB stainless steel bearings, CFR(Cyclonic Flow Rotor Technology). Jaw is a reel for general purpose and the best choice for the beginners.

**FEATURES**

- Corrosion-resistant graphite frame and side plates
- T6' machined aluminum, anodized U-shaped spool
- Multi-disc composite drag system
- 6BB+1RB bearing drive system
- External adjustable magnetic cast control system
- Quick-Set anti-reverse roller bearing
- Side plate access port for quick spool changes
- Aluminum handle with EVA handle knobs



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136839	J101-A	199 g	6.5:1	6+1	68 cm	5 kg	0.31/110, 0.33/100, 0.37/80	4718947071347

## BAITCASTING

### SCORPIO

A corrosion-resistant graphite body, finished with exclusive metal parts painted in black and blue – and that's just the body. The Scorpio Spinning reel features a quick-set infinite anti-reverse for jaw-shattering hook-sets, and the proprietary Cyclonic Flow Rotor technology to increase the airflow throughout the ported rotor, minimizing the risk of corrosion.

#### FEATURES

- Corrosion-resistant graphite body
- Exclusive metal black and purple paint
- 4 ball bearing + 1 roller bearing
- Quick-set infinite anti-reverse system
- CFR : Cyclonic Flow Rotor
- Machine-cut aluminum spool
- Graphite spare spool
- Smooth spool neck surface
- Zinc handle TPE flat knob
- Precision Elliptical Gearing System
- Machine-cut brass pinion gear
- Gunsmoke anodized bail
- RESII: Computer-balanced rotor system
- Even Flow line roller
- Multi-disc, Japanese oiled felt drag system




Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136554	SP100H-A	199 g	7.2:1	5+1	76 cm	5 kg	0.31/110, 0.33/100, 0.37/80	4718947070111 
136553	SP101-A	199 g	6.5:1	5+1	68 cm	5 kg	0.31/110, 0.33/100, 0.37/80	4718947070159 
136555	SP101H-A	199 g	7.2:1	5+1	76 cm	5 kg	0.31/110, 0.33/100, 0.37/80	4718947070296 

## BAITCASTING

### FUEL SPIN

Corrosion-resistant graphite frame and sideplates A6061-T6 machined aluminum, anodized U-shaped spool Multi-disc composite drag system 3BB+1RB bearing drive system External adjustable magnetic cast control system Quick-Set anti-reverse roller bearing Sideplate access port for quick spool changes Ergonomic handle design allows cranking closer to body



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136559	FSP101H-A	199 g	7.2:1	3+1	76 cm	5 kg	0.31/110, 0.33/100, 0.37/80	4718947070197 





# CONVENTIONAL REELS

# MAKAIRA TROLLING REEL TECHNOLOGY

## DUAL FORCE DRAG SYSTEM

The specialized carbon DFD or Dual Force Drag system used on all Makaira reels was specifically engineered to be mounted in the right side of the spool in order to bring all the mechanical workings closer together to maximize alignment and durability. The farther mechanical parts are separated the more opportunity there is for tolerance error and flexing which causes parts alignment issues. The DFD principal was specifically designed around the "Pull Bar Drag System". The major advantage to a "Pull Bar Drag System" is that the drag is being pulled rather than pushed. The most common type of lever drag in the industry is the "Push Bar Drag System". The Push Bar System places heavy pressure on the left side plate and utilizes the frame for overall stability which is a fatal flaw in this type of design. This pressure creates frame flex, reducing drag pressure and causing tolerance alignment issues. This problem is further exaggerated on open top designs from other companies. One of the major benefits to the pull bar design is that there is no pressure placed on the frame. Therefore, our open top frame designs will not suffer frame flex found in our competitors reels.

This highly efficient drag system was designed and engineered by Tiburon Engineering USA to increase maximum drag pressure, reduce side load pressure on ball bearings and improve heat dissipation for long term smoothness over extended periods. This Okuma DFD is considered a wet drag system comprised of two carbon fiber drag washers that are sandwiched together and bonded with a fiber glass core. Pure carbon washers are coated with a thin layer of Cal Sheet's Universal drag grease for virtually zero start up inertia. These washers are compressed by two precision ground 17-4 grade stainless steel drag plates that have been ground flat then polished for maximum smoothness. These stainless steel friction drag plates have a minimum 32 Rockwell hardness allowing for high-end drag settings and consistently smooth drag performance at all ranges. The drag system is secured to the right side of the spool by a 6061-T6 grade aluminum cover that features Type-II anodizing for maximum alignment, strength and corrosion resistance.



## TOURNAMENT DRAG CAM IGFA LINE CLASSES FOR MAKAIRA

Okuma's TDC or "Tournament Drag Cam" is designed with a more gradual ramp in the cam system that is intended for anglers fishing light line and tournament IGFA line classes. The standard cam that is installed in the Makaira reels is engineered to be compatible with braided line and offers aggressive drag ramps in order to output heavy drag ratings. The Makaira reels are engineered to output extreme drag pressure, but this is not required by all anglers. These reels have been designed to offer customization and with the TDC cam system, Okuma is offering anglers a reel that is versatile for a wide range of fishing applications, allowing anglers the ability to achieve a more gradual increase in drag settings.

## SILENT ANTI-REVERSE:

The Makaira's proprietary anti-reverse system allows for a smoother and quieter feeling. We equate this feeling to that of a Lexus, when compared to other reels in the market. Most reels in the market hide their rough gear quality by the noise and vibration caused by the engagement and clacking of the anti-reverse pawls. The Okuma silent system is unlike any other 2-speed reel in the industry for smoothness. This anti-reverse system is supported by a 12 point double dog anti-reverse pawl system. The Makaira system is very simple in principal but the performance is extremely advanced. As you turn the reel forward the anti-reverse pawls slide open allowing a friction free and quiet retrieve. As soon as the handle is stopped or pulled backwards the anti-reverse pawls are engaged into place by their drive shaft actuated sliding system. The strength of this anti-reverse system does not solely rely on a dog spring like found on most of our competitors reels. The sliding function does not rely heavily on a dog spring system and is mainly controlled by the forward and reverse movement applied to the drive shaft through the movement of the angler turning the handle.



## HELICAL CUT GEARING:

Makaira lever drag reels utilize helical cut main and pinion gears. This process allows for improved gear meshing which equates to improved gear smoothness. The angled teeth found in helical cut gears engage more gradually than straight cut or spur gear teeth. This allows helical gears to run smoother and quieter compared to spur gears. Spur gears cause impact stress and noise, because of the hard meshing and can not take as much torque as helical gears because their teeth are receiving impact blows as they mesh together.



## GREASE AND OIL:

To further enhance the corrosion resistance of Makaira reels, Okuma applies our CRC or Corrosion Resistant Coating process to all internal and external parts for maximum protection. Our CRC process utilizes a coating process of Corrosion X HD formula that actually penetrates and bonds to the aluminum parts for long term protection. The extra steps taken in the assembly of the Makaira allows this reel to be a leader in the fishing tackle industry for long term use and performance. To further enhance the Makaira's function and performance, Okuma applies Cal's Universal drag grease to our carbon fiber drag washers for the smoothest wet drag system. The addition of Cal's drag grease allows for virtually zero start up inertia and smooth performance at all settings. Cal's Universal grease is also used for coating moving parts such as the main and pinion gears for improved performance.



**CONVENTIONAL TROLLING & JIGGING**

**TESORO STAR DRAG REELS**

The Tesoro star drag reels were designed with the latest technology and insight from the leading fishermen in the industry. The Tesoro features 6061-T6 machined aluminum frame, side plates, and spool as well as our MSS: Mechanical Stabilizing System for a zero flex platform keeping all key components aligned, and running smoothly. With its 17-4 grade, self lubricating, stainless steel helical cut gearing, and multi-disc Carbonite drag system bathed in Cal's drag grease, this reel runs silent and smooth. The key features on the Tesoro star drag reel include the CRC: Corrosion-Resistant Coating process to help defend against any corrosion build up. The Tesoro features an aluminum swept handle that reduces wobble while cranking and an ergo grip soft touch handle knob for all day cranking.



**FEATURES**

- 6061-T6 machined aluminum frame, sideplate and spool
- 17-4 grade stainless steel helical-cut gearing
- Multi-disc carbonite drag system with Cal's drag grease
- CRC: Corrosion-Resistant Coating Process
- Swept aluminum star for increased ergonomics
- Anodized aluminum swept handle reduces wobble while cranking
- 4BB+1RB corrosion-resistant bearings, spool bearing with TSI
- Ergo Grip handle knob with anodized aluminum handle arm
- Dual anti-reverse (mechanical and roller bearing)
- XL Gearing: Drop-down gear box
- Quick-Set anti-reverse bearing allows for zero back play in handle
- MSS: Mechanical Stabilizing System for increased durability
- Self-lubricating gear system on all models
- High-speed 6.2:1 gear ratio



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136497	TSR-5NS	445 g	6.2:1	4+1	99 cm	9 kg	0.35/325,0.40/255,0.45/190	4718947054876
136498	TSR-5S	320 g	6.2:1	4+1	99 cm	7 kg	0.35/327, 0.40/256, 0.45/189	4718947038418
136499	TSR-10S	540 g	6.2:1	4+1	117 cm	10 kg	0.35/390,0.40/290,0.45/225	4718947026774
136500	TSR-12S	550 g	6.2:1	4+1	117 cm	10 kg	0.40/375, 0.45/270, 0.54/170	4718947026781

**CONVENTIONAL TROLLING**

**CORTEZ**

Okuma Cortez star drag reels bring light tackle performance to a whole new category of anglers. Drop down gearbox, swept in handle and Ergo Grip handle knob accentuate balance and delivery of power from the XL gearing, anodized machined aluminum spool and multi-disc Carbonite drag system. Graphite frame and side plates maintain a feather light feel and balance while increasing corrosion resistance.



**FEATURES**

- Corrosion resistant graphite frame and sideplates
- CZ-55W features aluminum frame and graphite sideplates
- Machined aluminum, anodized spool
- Multi-disc Carbonite drag system
- Forged aluminum, anodized star
- Anodized aluminum swept handle reduces wobble while cranking
- 4BB+1RB stainless steel bearings
- MCS: External magnetic cast control system on 5CS, 10CS and 12CS sizes
- Ergo grip handle knob
- Dual anti-reverse system (mechanical & roller bearing)
- XL Gearing: Drop down gear box
- Quick-Set anti-reverse roller bearing
- MSS: Mechanical Stabilizing System for increased durability
- Self-lubricating gear system, all models



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
136521	CZ-5CSa	396 g	4.7:1	4+1	96 cm	6.2 kg	0.37/350, 0.42/290, 0.48/210	4718947011879
136229	CZ-10CSa	499 g	6.2:1	4+1	109 cm	7 kg	0.37/391, 0.42/322, 0.48/239	4718947011855
136230	CZ-12CSa	522 g	6.2:1	4+1	109 cm	7 kg	0.42/489, 0.45/362, 0.55/277	4718947011848





CONVENTIONAL TROLLING

MAGDA PRO DXT

The lightweight Magda DXT Pro's mechanical line counter measures precisely the line usage, allowing you to hit the strike zone with absolute precision. Designed for heavy use, the Magda DXT Pro's corrosion-resistant frame houses durable machine-cut brass gearing and the longevity-increasing Self-Lubricating Gear System.

FEATURES

- Lightweight, corrosion-resistant frame and side plates
- Corrosion-resistant graphite spools
- Mechanical line counter function measures in feet
- 2 Stainless steel ball bearing
- 16-point anti-reverse for improved hookups
- Line counter screw port for improved air access
- Durable Machine cut brass gearing
- Self-Lubricating Gear System, all models
- 20 – 45 sizes with Ergo grip handle knob design
- 15-size features a twin paddle handle configuration
- Automatic trip spool engaging mechanism
- Stainless steel levelwind line guide system
- DLXT represents left hand crank models
- MA-15DXT-T features a twin paddle handle design



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>Magda Pro DXT</b>								
136512	MA-20DLXT	391 g	5.1:1	2	58 cm	7 kg	0.35/260, 0.40/200, 0.45/150	4718947011923
136513	MA-30DLXT	490 g	4.0:1	2	61 cm	8 kg	0.40/410, 0.45/310, 0.50/250	4718947011930
136509	MA-15DXT-T	357 g	5.1:1	2	58 cm	6 kg	0.35/220, 0.40/170, 0.45/120	4718947035370
136510	MA-20DXT	366 g	5.1:1	2	58 cm	6 kg	0.35/260, 0.40/200, 0.45/150	4718947011893
136223	MA-30DXT	457 g	4.0:1	2	61 cm	7 kg	0.40/410, 0.45/310, 0.50/250	4718947011909
<b>Magda Pro DXT (M)</b>								
● 142353	MA-20DXT(M)	366 g	5.1:1	2	58 cm	6 kg	0.35/260, 0.40/200, 0.45/150	4718947092021
<b>Magda DT</b>								
149422	MA-15DLT	365 g	5.1:1	0	63 cm	6 kg	0.35/220, 0.40/170, 0.45/130	4718947060143
136831	MA-15DT-T	365 g	5.1:1	0	63 cm	6 kg	0.35/220, 0.40/170, 0.45/120	4718947011367
136955	MA-20DLT	391 g	4.9:1	0	58 cm	7 kg	0.35/260, 0.40/200, 0.45/150	4718947049988
136224	MA-20DT	391 g	5.1:1	0	58 cm	7 kg	0.35/260, 0.40/200, 0.45/150	4718947011459
136516	MA-30DLT	450 g	4.0:1	0	64 cm	7 kg	0.40/420, 0.45/320, 0.50/260	4718947051349
136225	MA-30DT	490 g	4.0:1	0	61 cm	8 kg	0.40/410, 0.45/310, 0.50/250	4718947011480

NEW  
SIZE







**CONVENTIONAL TROLLING**

**CONVECTOR**


Okuma Convector Low Profile Line Counter Reel features mechanical line counter with anti-fogging clear view technology, and equips with A6061-T6 machined aluminum, anodized spool, quick drop system. The reel is available in both right and left hand retrieve to serve all anglers.

**FEATURES**

- Precision machine cut brass main and pinion gears
- Mechanical line counter function measures in feet
- CVT: Clear View Technology anti-fogging line counter
- 2BB + 1RB stainless steel bearings for long last performance
- Automatic trip, spool engagement mechanism
- A6061-T6 machined aluminum, anodized spool
- Multi-disc high output Carbonite drag system
- Dual anti-reverse for maximum reliability
- Synchronized levelwind optimized for braided line
- Quick Drop, switch for precision lure/bait placement
- Available in both right and left hand retrieve
- On/Off clicker perfect for all trolling applications



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>Convector Line Counter</b>								
136524	CV-15D	448 g	5.1:1	2+1	58 cm	8 kg	0.35/220, 0.40/170, 0.45/120	4718947211941
136525	CV-20D	468 g	5.1:1	2+1	58 cm	8 kg	0.35/260, 0.40/200, 0.45/150	4718947211958
136231	CV-30D	610 g	4.0:1	2+1	61 cm	9 kg	0.40/410, 0.45/310, 0.50/250	4718947211965
136232	CV-45D	649 g	4.0:1	2+1	66 cm	9 kg	0.45/440, 0.50/360, 0.55/300	4718947211972
136233	CV-45DS	638 g	6.2:1	2+1	97 cm	7 kg	0.45/400, 0.50/360, 0.55/300	4718947032966
137246	CV-163D	224 g	6.3:1	2+1	68 cm	5 kg	0.26/240, 0.31/160, 0.37/110	4718947062321
136234	CV-354D	332 g	5.4:1	2+1	66 cm	10 kg	0.33/240, 0.37/180, 0.41/145	4718947044273
<b>Convector Low Profile Line Counter</b>								
136235	CV-163DLX	224 g	6.3:1	2+1	68 cm	5 kg	0.26/240, 0.31/160, 0.37/110	4718947062338
136832	CV-354DLX	332 g	5.4:1	2+1	66 cm	10 kg	0.33/240, 0.37/180, 0.41/145	4718947049995

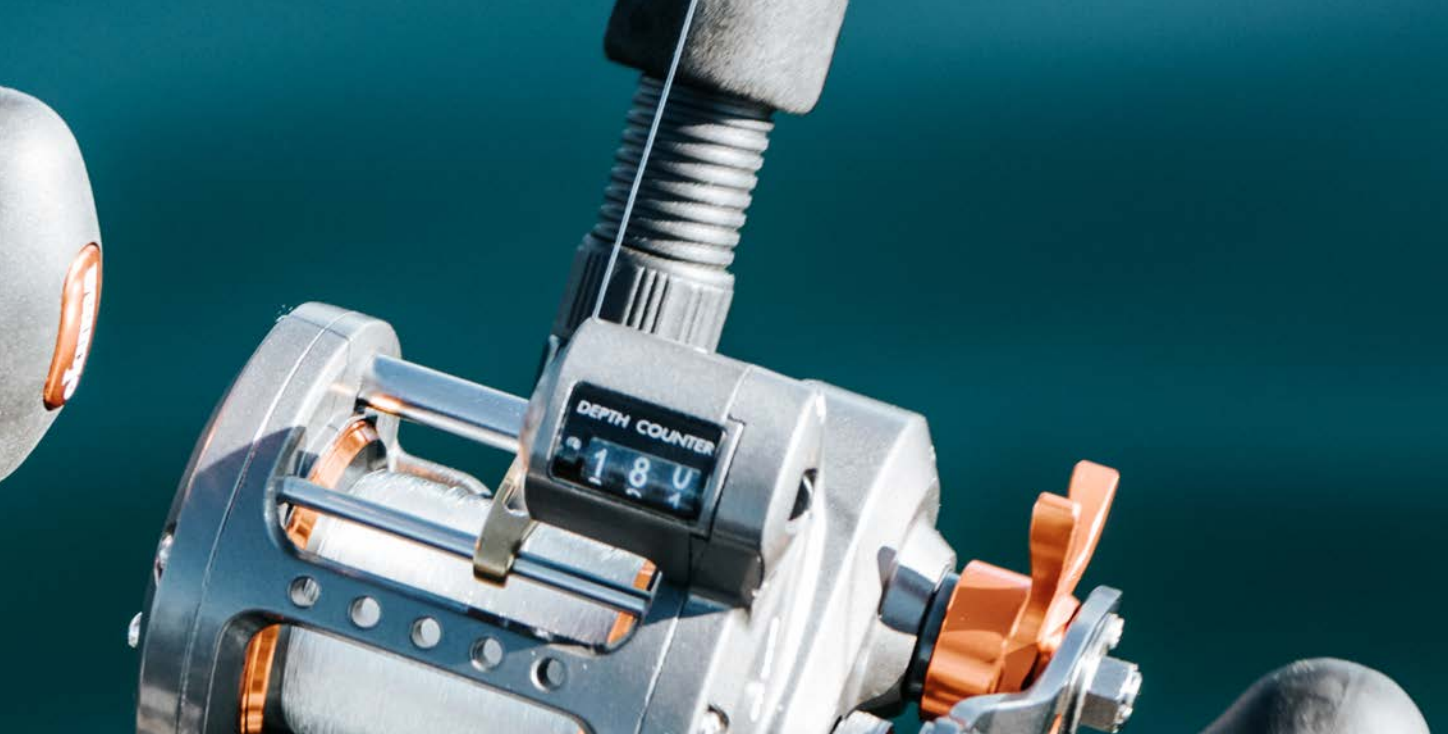

**CONVENTIONAL TROLLING**

**COLD WATER**

Serving anglers with a premium line counter reel in both right and left hand retrieve, Okuma proudly introduces the Cold Water. The Cold Water family is constructed upon a powerful star drag foundation including heavy-duty machine-cut brass gears, dual anti-reverse systems and full Carbonite drag system with up to 20-pounds of maximum drag output. The custom line counter includes new Okuma anti-fogging Clear View Technology, and should the counter be overwhelmed by water, an access port allows the interior to be dried completely. The line counter's reset button has also been recessed and placed on the side of the unit to eliminate errant resets. The series includes four sizes in right hand retrieve, three in leaving anglers with a premium line counter reel in both right and left hand retrieve.

**FEATURES**

- Lightweight corrosion resistant frame & sideplates
- Multi-disc, Carbonite drag system
- Aluminum handle arm with Ergo grip handle knobs
- 2BB + 1RB Stainless steel ball bearings
- Quick-set anti-reverse roller bearing
- Oversized machine cut brass XL drive and pinion gears
- Self-lubricating gearing system, all models
- Speed Lock pinion gear system, all models
- Machined aluminum, two tone anodized spool
- Dual anti-reverse system. (Mechanical and roller bearing)
- Mechanical line counter function measures in feet
- CVT: Clear View Technology anti-fogging line counter
- Aluminum ratcheting drag star for precision drag settings
- Wide Mouth levelwind: Clearance for copper lines
- Automatic trip spool engaging mechanism
- MSS: Mechanical Stabilizing System for increased durability
- DLX represent left hand crank line counter models



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>Right Handed Line Counter Reels</b>								
136535	CW-203D	430 g	5.1:1	2+1	58 cm	8.2 kg	0.35/270, 0.40/210, 0.45/150	4718947215420
136238	CW-303D	570 g	4.1:1	2+1	61 cm	9 kg	0.40/420, 0.45/320, 0.50/260	4718947215437
136239	CW-453D	617 g	4.1:1	2+1	66 cm	9 kg	0.45/450, 0.50/360, 0.55/300	4718947215444
<b>Left Handed Line Counter Reels</b>								
136537	CW-203DLX	424 g	5.1:1	2+1	56 cm	8.2 kg	0.35/270, 0.40/210, 0.45/150	4718947215451
136538	CW-303DLX	570 g	4.1:1	2+1	61 cm	9 kg	0.40/420, 0.45/320, 0.50/260	4718947215468

CONVENTIONAL TROLLING

NEW

# SOLTERRA B

Built to battle the strongest of fish, the Solterra SLX B is the new generation of the acclaimed Solterra saltwater trolling reels. Armed with thrust bearings, the Solterra SLX B withstands tremendous side loads and allows you to crank the handle with reduced resistance when under pressure. The modern finish perfects the performance-packed reel.

FEATURES

- Stainless Steel Main Gear, Pinion Gears & Shafts
- Carbonite Drag System with Cal's Universal Drag Grease
- Double Dog Silent Anti-Reverse on All Models
- Stainless Steel Body Armor Reduces Frame Flex (20-50W Models)
- Thrust Bearings Help Reduce Handle Turning Resistance



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>High Speed Open Top Frame Reels</b>								
● 142191	SLX-10CSb	660 g	6.0:1	5BB+2TB+1RB	107 cm	10 kg	0.40/380, 0.45/290, 0.50/230	4718947090294
● 142192	SLX-15CSb	697 g	6.0:1	5BB+2TB+1RB	107 cm	10 kg	0.45/420, 0.50/340, 0.55/280	4718947090300
<b>Levelwind Reels</b>								
● 142342	SLX-10Lb	596 g	4.2:1	5BB+2TB+1RB	74 cm	10 kg	0.40/380, 0.45/290, 0.50/230	4718947090362
● 142343	SLX-15Lb	644 g	4.2:1	5BB+2TB+1RB	74 cm	10 kg	0.45/420, 0.50/340, 0.55/280	4718947090379
● 142345	SLX-20Lb	1034 g	3.5:1	5BB+2TB	81 cm	15 kg	0.50/530, 0.55/440, 0.60/370	4718947090393
<b>Standard Single Speed Lever Drags</b>								
● 142344	SLX-20b	984 g	3.5:1	5BB+2TB	81 cm	15 kg	0.50/530, 0.55/440, 0.60/370	4718947090041
● 142346	SLX-30b	1017 g	3.5:1	5BB+2TB	81 cm	15 kg	0.50/700, 0.55/580, 0.60/490	4718947090058
● 142348	SLX-50Wb	1487 g	3.1:1	5BB+2TB	81 cm	18 kg	0.70/640, 0.90/380, 1.0/310	4718947090317
<b>Two-Speed Lever Drags</b>								
● 142193	SLX-20Iib	991 g	3.8:1 & 1.7:1	5BB+2TB	89 cm	15 kg	0.50/530, 0.55/440, 0.60/370	4718947090584
● 142347	SLX-30Iib	1017 g	3.8:1 & 1.7:1	5BB+2TB	89 cm	15 kg	0.50/700, 0.55/580, 0.60/490	4718947090591
● 142349	SLX-50WIib	1510 g	3.1:1 & 1.3:1	5BB+2TB	81 cm	18 kg	0.70/640, 0.90/380, 1.0/310	4718947090607

CONVENTIONAL TROLLING

# CLASSIC PRO XPD

Okuma Classic Pro XPD line counter reels feature strike zone line counter system incorporates a mechanical counter that precisely measures line based on spool revolutions. The speed LOC pinion gear system allows positive engaging at extreme high speed

FEATURES

- Lightweight corrosion resistant frame and sidelates
- Machined aluminum, anodized spool
- Stainless steel reinforcing sideplate rings
- Mechanical line counter function measures in feet
- Multi-disc Carbonite drag system
- 2 Stainless steel ball bearings
- Durable machine-cut brass gearing
- Ergo Grip handle knob with anodized aluminum handle arm
- Self lubricating gear system, all models
- Stainless steel level-wind line guide system



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>Right Handed Line Counter Reels</b>								
136226	XPD-20Da	390 g	5.1:1	2	58 cm	7 kg	0.35/270, 0.40/210, 0.45/150	4718947012111
136227	XPD-30Da	500 g	4.0:1	2	61 cm	8 kg	0.40/420, 0.45/320, 0.50/260	4718947012128
<b>Left Handed Line Counter Reels</b>								
136519	XPD-20DLXa	390 g	5.1:1	2	58 cm	7 kg	0.35/270, 0.40/210, 0.45/150	4718947012135
136228	XPD-30DLXa	500 g	4.0:1	2	61 cm	8 kg	0.40/420, 0.45/320, 0.50/260	4718947012142












**CONVENTIONAL TROLLING**

**CLASSIC CLX**

Lightweight corrosion resistant frame and sideplates • Machined aluminum, anodized spool  
 • Ported graphite frame design • Stainless steel reel foot for strength • Dependable multi-disc Rulidium drag system • Classic Pro XP features 2 ball bearings • Machine cut brass and stainless steel gearing • Aluminum power handle with T-style knobs • Self lubricating gear system • Stainless steel levelwind line guide system



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>Classic CLX Right Handed Levelwind Star Drag Reels</b>								
136236	CLX-200La	373 g	5.1:1	0	58 cm	3.5 kg	0.35/270, 0.40/210, 0.45/150	4718947011978 
136237	CLX-300La	452 g	3.8:1	Bushing	61 cm	6 kg	0.40/420, 0.45/320, 0.50/260	4718947011985 
136534	CLX-450La	486 g	3.8:1	Bushing	63.5 cm	6 kg	0.45/450, 0.50/360, 0.55/300	4718947011992 
<b>Classic CLX Left Handed Levelwind Star Drag Reels</b>								
136954	CLX-300Lxa	452 g	3.8:1	Bushing	61 cm	6 kg	0.40/420, 0.45/320, 0.50/260	4718947011596 
<b>Classic Pro CLX Right Handed Levelwind Star Drag Reels</b>								
136529	CLX-302La	452 g	3.8:1	2	61 cm	6 kg	0.40/420, 0.45/320, 0.50/260	4718947011763 
136531	CLX-452La	486 g	3.8:1	2	63.5 cm	6 kg	0.45/450, 0.50/360, 0.55/300	4718947011794 
<b>Classic Pro CLX Left Handed Levelwind Star Drag Reels</b>								
136532	CLX-302Lxa	452 g	3.8:1	2	61 cm	6 kg	0.40/420, 0.45/320, 0.50/260	4718947011824 

RED = New 2023



CONVENTIONAL TROLLING

# MAKAIRA

Okuma Makaira lever drag reels are perfect for big game fisheries for billfish, large tuna, and sharks. With advanced, unique, and numerous patents, Makaira provides uncompromised excellence within every aspect of its design, construction, and performance.

### FEATURES

- 6061-T6 machined aluminum frame with forged side plates
- 17-4 grade stainless steel gearing
- Helical cut gears for increased torque, smoothness and improved gear meshing
- Makaira reels all feature two-speed gearing systems
- Gold anodized two-speed gear shifter housing
- Cold-forged, Type-II anodized, machined aluminum spool
- CRC: Corrosion Resistant Coating process
- Patented spool pin system for use with braided or mono lines
- Carbonite Dual Force drag system featuring Cal's universal drag grease
- Custom designed thrust bearing: Alleviates side load on heavy drag settings
- 4-pcs ABEC-5 precision Sapporo stainless steel ball bearings
- MK-80WII features 6-pcs of Sapporo ball bearings
- Double-dog, proprietary silent anti-reverse system
- Ratcheting drag lever and pre-set knob for precise drag setting
- Patented T-Bar handle with Easy Roll graphite insert on all models
- Heavy-duty stainless steel ratcheting clicker system
- Heavy-duty, 17-4 grade stainless steel drive and spool shafts
- Type-II gold anodized frame, sideplates, spool, drag lever and handle
- Open top frame design on 16II, 20II, and 50II
- Lug and plug system on all open top reel models
- Machined thumb rest on rear cross bar for improved ergonomics
- Forged aluminum full hard anodized reel foot and reel clamp
- Machine-etched marlin logo on left side plate
- Precision placement of drain holes maximizes water removal from reel
- Special screw ports around side plate screws reduces water/corrosion buildup



136619



136620



148213



148215

Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>Two-Speed Lever Drag Reels</b>								
136619	MK-16II	1160 g	4.3:1 & 1.3:1	4+1	99.6 & 30.0 cm	21.8 kg	Monofilament : 0.42/800, 0.48/600, 0.55/450, Braid : 0.36/1000, 0.41/830, 0.44/630	4718947215826
136620	MK-20II	1298 g	3.8:1 & 1.7:1	4+1	100.1 & 44.5 cm	25 kg	Monofilament : 0.48/800, 0.55/600, 0.60/480, Braid : 0.36/1250, 0.41/1100, 0.44/880	4718947214423
148213	MK-30II	1417 g	3.8:1 & 1.7:1	4+1	100.1 & 44.5 cm	25 kg	Monofilament : 0.55/700, 0.60/640, 0.70/500, Braid : 0.36/1620, 0.41/1300, 0.44/1260	4718947214430
148214	MK-50II	1741 g	3.2:1 & 1.3:1	4+1	96.0 & 38.9 cm	39 kg	Monofilament : 0.55/910, 0.70/590, 0.90/360, Braid : 0.44/1300, 0.49/1000, 0.7/600	4718947214447
148215	MK-50WII	1843 g	3.2:1 & 1.3:1	4+1	96.0 & 38.9 cm	39 kg	Monofilament : 0.70/820, 0.75/710, 0.90/510, Braid : 0.44/1720, 0.49/1540, 0.7/890	4718947214454
136621	MK-80WII	3289 g	3.1:1 & 1.2:1	6BB+1TB	116.1 & 52.9 cm	45.4 kg	0.90/910, 1.00/770, 1.12/600	4718947214461
136478	MK-130II	4750 g	2.2:1 & 1.2:1	6BB+1TB	100.8 & 55.1 cm	45.4 kg	0.90/1450, 1.0/1170, 1.12/920	4718947216083



**CONVENTIONAL TROLLING**

**MAKAIRA SEA**

The silver etched yellow fin tuna glistens as bright as the sea on top of the dark gun smoke anodized aluminum frame. This reel is as smooth as it is sleek with its Carbonite Dual Force drag system and its helical cut gears. Its over sized handle and lower low speed gearing versus the original Makaira serve up extreme torque for the Makaira SEa. The Makaira SEa is a great edition to the already popular Makaira family.

**FEATURES**

- Open spool bearings with TSI-301 oil. Increases freespool 2-1/2 times
- MK80WIISEa and MK-130IISEa feature grease-packed spool bearings
- All non-spool bearings feature full grease pack for maximum longevity
- Features Special Edition Gun Smoke and Black anodizing
- SEa reels feature a yellowfin tuna etched into the sideplate
- Frames have been machined out for increased clearance between spool and cross bars
- MK-10/15 feature MK-20 size handle knobs
- MK-20/30 feature the MK-50 handle arm and knobs
- Lower speed 1.3:1 gear ratio featured in 20/30 sizes
- Lower speed 1.0:1 gear ratio featured in 50 size
- Type-II gun smoke anodized frame, side plates and drag lever



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>Two-Speed Lever Drag Reels</b>								
136479	MK-10II SEa	740 g	4.7:1 & 2.1:1	4BB+1TB	85.1 & 38.1 cm	15.4 kg	0.37/420, 0.42/350, 0.48/260	4718947215635
136480	MK-15TII SEa	822 g	4.7:1 & 2.1:1	4BB+1TB	98.8 & 43.4 cm	18.2 kg	0.42/525, 0.48/390, 0.55/300	4718947048271
136481	MK-16II SEa	1160 g	4.3:1 & 1.3:1	4BB+1TB	99.6 & 30.0 cm	21.7 kg	0.37/910, 0.42/795, 0.48/590	4718947215833
136483	MK-80WII SEa	3289 g	3.1:1 & 1.2:1	6BB+1TB	116.1 & 52.1 cm	45.4 kg	0.90/910, 1.00/770, 1.12/600	4718947011343
136484	MK-130II SEa	4750 g	2.2:1 & 1.2:1	6BB+1TB	100.8 & 55.1 cm	45.4 kg	0.90/1450, 1.0/1170, 1.12/920	4718947011381

CONVENTIONAL TROLLING

NEW SIZE

# MAKAIRA SEA SILVER

The silver etched yellowfin tuna glistens as bright as the sea on top of the matte black anodized aluminum frame. This reel is as smooth as it is sleek with its Carbonite Dual Force drag system and its helical-cut gears. It's oversized handle and lower low-speed gearing versus the original Makaira serve up extreme torque for the Makaira SEa.

FEATURES

- Forged aluminum, machine-cut body & sideplate
- Cyclonic Flow Rotor
- Forged stainless steel main gear for ultimate power and strength
- Precision machine-cut 17-4 grade stainless steel pinion gear
- Oversized 17-4 grade stainless steel spool shaft reduces flex
- Hydro Sealed Body and DFD system for maximum protection
- Carbonite high-output drag with Cal's drag grease on full DFD
- Customized pre-set drag system, works like a lever drag reel
- 9HPB + 1RB corrosion-resistant stainless steel bearings
- Dual anti-reverse system for maximum strength and reliability
- Quick-Set stainless steel German anti-reverse roller bearing
- CRC: Corrosion-resistant coating process
- Machined aluminum, 2-tone anodized spool with LCS lip
- Machined aluminum screw-in handle arm for added strength
- Right and Left handles are designed differently: Order by Rt/Lt
- Heavy-duty, solid aluminum bail wire with manual trip function
- Rotor brake system works in conjunction with manual bail trip
- Machined aluminum handle knob: Custom options available



136485



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
Two-Speed Lever Drag Reels								
136485	MK-10II SEa-Silver	740 g	4.7:1 & 2.1:1	4+1TB	85 cm	15.4 kg	0.37/420, 0.42/350, 0.48/260	4718947215680
136486	MK-15TIIEa-Silver	822 g	4.7:1 & 2.1:1	4+1TB	99 cm	18.2 kg	0.42/525, 0.48/390, 0.55/300	4718947048288
136487	MK-16II SEa-Silver	1160 g	4.3:1 & 1.3:1	4+1TB	100 cm	21.7 kg	0.37/910, 0.42/795, 0.48/590	4718947215710
136488	MK-20II SEa-Silver	1298 g	3.8:1 & 1.7:1	4+1TB	100 cm	25 kg	0.48/800, 0.55/600, 0.60/480	4718947215697
136489	MK-30II SEa-Silver	1417 g	3.8:1 & 1.3:1	4BB+1TB	100 cm	25 kg	0.55/770, 0.60/640, 0.70/500	4718947215703
● 142510	MK-50II SEa-SILVER	1707 g	3.2:1 & 1.0:1	4+1TB	96 cm	39 kg	0.55/910, 0.70/590, 0.90/360	4718947026323
● 142511	MK-50WII SEa-SILVER	1843 g	3.2:1 & 1.0:1	4+1TB	96 cm	39 kg	0.70/820, 0.75/710, 0.90/510	4718947015464
136490	MK-80WII SEa-Silver	3289 g	3.1:1 & 1.2:1	6+1TB	116 cm	45.4 kg	0.90/910, 1.00/770, 1.12/600	4718947026316
136491	MK-130II SEa-Silver	4750 g	2.2:1 & 1.2:1	6+1TB	97 cm	45.4 kg	0.90/1450, 1.0/1170, 1.12/920	4718947043726





## ALIJOS 2-SPEED

The Alijos 2-Speed Lever Drag is a lightweight, compact bodied, big fish stopping machine. Built with 6061-T6 machined aluminum for the ultimate in strength. The 1-piece frame continues around to the non-handle side, side plate which has a cast control system for precision spool control. The spool bearings are bathed in TSI oil giving it the ultimate in castability and freespool. The Alijos reels feature a longer 90mm handle arm and oversized T-bar handle knob for great torque and comfort. The clicker mechanism has been reworked to give a louder clicking sound for trolling or dead stick applications. The new 2-speed shifting mechanism has been completely reworked by Okuma giving it the ultimate in shifting. The DFD: Dual Force Drag puts out tremendous drag pressure with its 100% larger drag plates.

### FEATURES

- 17-4 grade stainless steel main and pinion gears
- Carbonite Dual Force Drag system with Cal's drag grease
- 6-NMB corrosion resistant stainless steel bearings
- Spool bearings feature TSI-301 oil for unmatched freespool
- Rigid 1-pcs frame and left sideplate construction
- 6061-T6 machined aluminum frame and sideplates
- Cold forged, Type-II anodized, machined aluminum spool
- Custom designed thrust bearing: Alleviates side load on heavy drag settings
- Silent retrieve system for ultimate cranking smoothness
- 90mm handle arm, increases cranking leverage/power
- Oversized T-Bar handle on all models, for cranking power
- Lug and plug harness system featured on 12 and 16 sizes
- External adjustable cast control system on left sideplate
- CRC: Corrosion Resistant Coating process



142171



148223



142172



142173

Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
● 142171	AJ-5II	550 g	6.4:1 & 3.8:1 6	6BB+1TB	107 cm	11 & 7 kg	0.32/570, 0.37/400, 0.42/320	4718947047878
● 142352	AJ-5NII	530 g	6.4:1 & 3.8:1 6	6BB+1TB	107 cm	11 & 7 kg	0.32/385, 0.37/275, 0.42/225	4718947047946
● 148222	AJ-12II	800 g	4.7:1 & 2.1:1	6BB+1TB	90 cm	15.5 & 12.3 kg	0.42/510, 0.48/380, 0.55/290	4718947047885
● 148223	AJ-12NSII	765 g	6.4:1 & 2.1:1	6BB+1TB	123 cm	15.5 & 12.3 kg	0.42/300, 0.48/200, 0.55/150	4718947047953
● 142172	AJ-12SII	810 g	6.4:1 & 2.1:1	6BB+1TB	123 cm	15.5 & 12.3 kg	0.42/510, 0.48/380, 0.55/290	4718947047939
● 142173	AJ-16II	995 g	4.3:1 & 1.3:1	6BB+1TB	-	21.7 & 15.5 kg	0.42/800, 0.48/600, 0.55/450	4718947047892





**CONVENTIONAL JIGGING**

**CAVALLA**








The Cavalla 2-Speed Lever Drag reel is a compact-bodied machine built to handle the toughest of conditions. This reel is built with 6061-T6 machined aluminum frame and side plates. The rigid 1-piece frame continues around to the non-handle side plate. This rigid frame combined with a cold forged, type-II anodized machined aluminum spool give you a sleek and rugged weapon. The Cavalla reels feature a battle-proven carbonite drag system with Cal's drag grease that puts out 24 to 34 pounds of drag at full. The 17.4 grade stainless steel main and pinion gear as well as the CRC: Corrosion Resistance Coating process make this reel virtually corrosion resistant. Add to that 4 corrosion-resistant stainless steel bearings and a silent retrieve system for complete smooth operation. The Cavalla 2-speed reels feature a 6.4:1 and 3.8:1 gear ratio on the 5 size reels and a 4.7:1 and 2.1:1 gear ratio on the 12 size. Both the 5 and 12 size reels come in left and right hand retrieve and feature an on/off bait clicker. This reel is compact and comfortable, and features an Ergo Grip handle knob and anodized aluminum handle arm.



**FEATURES**

- Rigid 1-pcs frame and left sideplate construction
- 6061-T6 Machined aluminum frame and sideplates
- 17-4 grade stainless steel main and pinion gears
- Carbonite drag system with Cal's drag grease
- Cold-forged, Type-II anodized, machined aluminum spool
- Cold-forged, Type-II anodized, machined aluminum spool
- CRC: Corrosion-Resistant Coating process
- 4 BB corrosion-resistant stainless steel bearings
- Ergo Grip handle knob with anodized aluminum handle arm
- Silent retrieve system for cranking smoothness
- On/Off bait clicker for all lever drag models



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
<b>Right Handed Two Speed Reels</b>								
136828	CAV-5NII	460 g	6.4:1 & 3.8:1	4BB	107 & 63 cm	7 & 11 kg	0.32/385, 0.37/275, 0.42/225	4718947047830 
136493	CAV-5II	485 g	6.4:1 & 3.8:1	4BB	107 & 63 cm	7 & 11 kg	0.32/570, 0.37/400, 0.42/320	4718947047854 
136494	CAV-12II	705 g	4.7:1 & 2.1:1	4BB	90 & 40 cm	12.2 & 15.4 kg	0.42/510, 0.48/380, 0.55/290	4718947047861 
<b>Left Handed Two Speed Reels</b>								
136495	CAV-5IILX	485 g	6.4:1 & 3.8:1	4BB	107 & 63 cm	7 & 11 kg	0.32/570, 0.37/400, 0.42/320	4718947047816 
136496	CAV-12IILX	705 g	4.7:1 & 2.1:1	4BB	90 & 40 cm	12.2 & 15.4 kg	0.42/510, 0.48/380, 0.55/290	4718947047823 
148163	CAV-5S	465 g	6.4:1	4BB	107 cm	7 & 11 kg	0.32/570, 0.37/400, 0.42/320	4718947052025 
148162	CAV-5NS	440 g	6.4:1	4BB	107 cm	7 & 11 kg	0.32/385, 0.37/275, 0.42/225	4718947052018 



**CONVENTIONAL JIGGING**

**CAVALLA BLUE**

Your guide to the deep blue, the Cavalla Blue lever drag reel covers a whole range of sea fishing, from vertical jigging to casting, trolling, and fishing with live bait. To handle the strength of species like the sailfish and yellow tuna, the Cavalla Blue is built with a rigid one-piece aluminum frame and side plate construction. The Corrosion-Resistant Coating process increases the reel's resistance against the elements.

**FEATURES**

- 6061-T6 Rigid Aluminum Frame & Side Plates
- Carbonite Drag Washers with Cal's Drag Grease
- Cold-Forged Type-II Anodized Machined Aluminum Spool
- 4 HPB Corrosion-Resistant Ball Bearings
- On/Off Bait Clicker
- CRC: Corrosion Resistant Coating Process
- 17-4 Grade Stainless Steel Main and Pinion Gears
- Silent Anti-Reverse System for Smooth Cranking
- Additional Stabilization Plate for Anti-Reverse



Product Number	Model	Weight	Gear Ratio	Bearings	Line Retrieve	Max Drag	Line Capacity	Barcode
● 142174	CAVB-5NII	16.2 g	6.4:1 & 3.8:1	4BB	107 cm	11 & 7 kg	0.32/420, 0.37/300, 0.42/250	4718947077523
● 142175	CAVB-5NIIIX	460 g	6.4:1 & 3.8:1	4BB	107 cm	11 & 7 kg	0.32/385, 0.37/275, 0.42/225	4718947078377

**NEW**







# CENTERPIN REELS




**CENTERPIN - MATCH**

## SHEFFIELD FLOAT

Unbelievably smooth bearings • Zero drag • Traditional design • 4.5 diameter ultra-smooth running centre pin • Stainless steel shaft • One piece machine cut aluminium frame • One piece machine cut aluminium spool • 2 German HPB stainless ball bearings • On/off ratchet • Neoprene reel pouch included



Product Number	Model	Weight	Gear Ratio	Bearings	Max Drag	Line Capacity	Barcode
142501	S-1002	399 g	-	2HPB	-	0.26/250	4718947311009 



**RODS**

# ROD TECHNOLOGY

## UFR TECHNOLOGY



Strong, Stable, Smooth - Okuma's Mechanical Stabilizing System is a support system that ties the spool shaft, pinion gear, pinion gear bearing, drive shaft & main gear together with a single support system. While other reels on the market offer minimal or no gear stabilization, this patented Okuma design allows all of these critical parts to stay in precise alignment. Designed specifically to hold up to the demands of braided & wire line fishing, the MSS support system stabilizes the spool shaft at 3 key stress points to eliminate flex under pressure - which directly translates into a reel that is more durable, stronger & smoother than the competition.


**FREEING  
ANGLERS FROM  
THE CHOICE  
BETWEEN POWER  
AND SENSITIVITY**

## UMR TECHNOLOGY



Okuma's Ultimate Matrix Reinforcement (UMR) technology maximizes rod strength while minimizing weight, so you can rise to meet any challenge.

**LIGHTWEIGHT STRENGTH  
BUILT FOR ANY CHALLENGE**

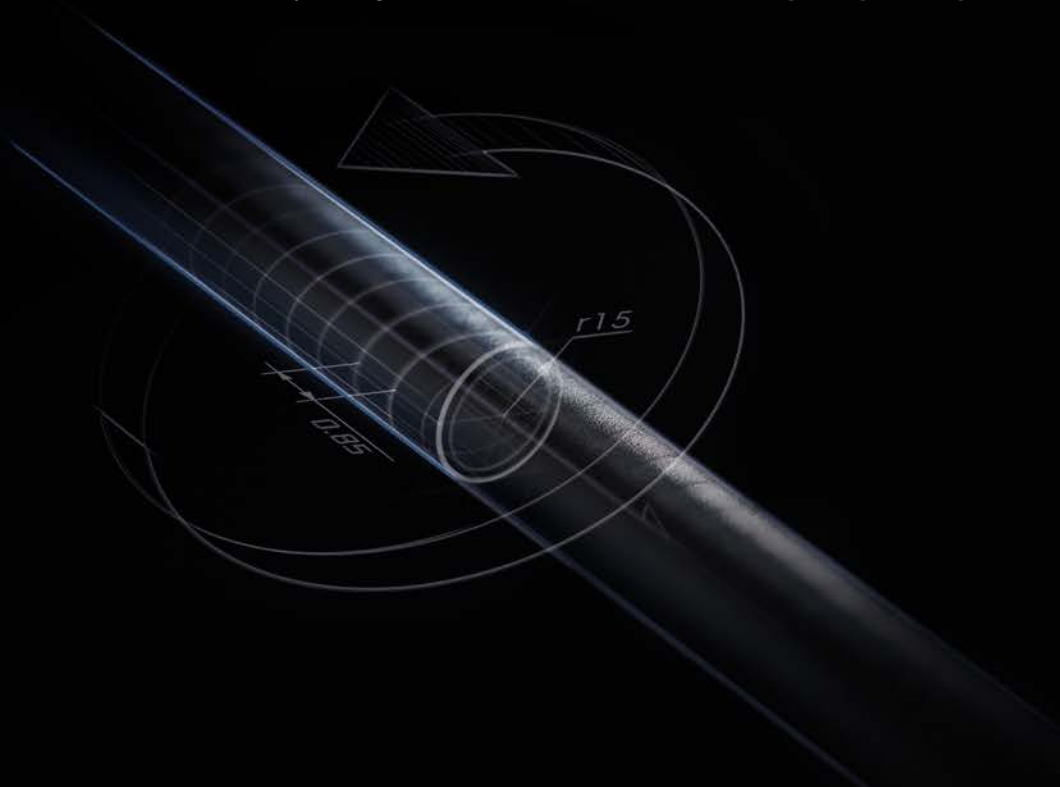





**SPINNING & CASTING**

**ONE ROD**

Okuma ONE rods are available for both casting rods and spinning rods, feature ultra light & sensitive 40T carbon blank construction, it's one of Okuma perfect rods for bass fishing.

**FEATURES**

- Ultra-light 40T carbon blank construction
- Fuji anti-tangle stainless steel guides frame
- Fuji Alconite guide inserts reduce friction
- Fuji mini split reel seat
- Okuma carbon cone handle design
- High-quality cloth bag package



148205



137872

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode	
<b>One Rod Spinning</b>									
148205	OR-S-661MH	MH	Fast	6'6" / 198 cm	1	15-45g	7+Tip	4718947080752	
137874	OR-S-661M	M	Fast	6'6" / 198 cm	1	10-30g	7+Tip	4718947080745	
137875	OR-S-661ML	ML	Fast	6'6" / 198 cm	1	7-20g	7+Tip	4718947080738	
<b>One Rod Casting</b>									
137872	OR-C-661M	M	Fast	6'6" / 198 cm	1	10-30g	9+Tip	4718947080721	
137873	OR-C-661ML	ML	Fast	6'6" / 198 cm	1	7-20g	9+Tip	4718947080714	

**SPINNING**

**HELIOS AIR**

40T+46T Toray carbon with Okuma UMR blank construction • UMR: Ultimate Matrix Reinforcement • New exclusive Psychedelic blank artwork • Seaguide ONE GUIDE design, SS316 stainless steel and tangle-free guides with zirconium inserts • Okuma Unique tooling skeleton reel seat, Japan carbon injection, with Psychedelic carbon tube body • Durable Winn grip design • Split grip butt design for reduced weight and improved balance • High quality rods bag • 2-sec all-round rods from 7'0" up to 9'0", 7-25g ultra-light up to more power predator 50-110g



136767

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136767	HSA-S-702M	M	Fast	7'0"/213 cm	2	7-25g	7+Tip	4718947073068
136768	HSA-S-802M	M	Fast	8'0"/244 cm	2	14-40g	8+Tip	4718947073075
136769	HSA-S-802MH	MH	Fast	8'0"/244 cm	2	20-50g	8+Tip	4718947073082
136766	HSA-S-802H	H	Fast	8'0"/244 cm	2	30-70g	8+Tip	4718947053183
136770	HSA-S-862XH	XH	Fast	8'6"/259 cm	2	50-110g	8+Tip	4718947073099
136771	HSA-S-902H	H	Fast	9'0"/274 cm	2	30-70g	8+Tip	4718947073105

**SPINNING**

**PCH AIR**

40T Toray carbon, ultra-light and responsive blank construction. • New exclusive psychedelic blank artwork. • Fuji K-concept tangle free stainless steel guides. • Fuji Alconite inserts reduce friction. • Okuma unique tooling skeleton reel seat, Japan carbon injection. • Durable 3A high quality EVA grip design. • Split grip butt design for reduced weight and improved balance. • High quality rod bag.



148189

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148189	PCHA-S-692M	M	Fast	6'9" / 204 cm	2	5-21g	7+Tip	4718947067968
148190	PCHA-S-701MH	MH	Fast	7'0" / 212 cm	1	7-28g	7+Tip	4718947067975
148191	PCHA-S-702MH	MH	Fast	7'0" / 212 cm	2	7-28g	7+Tip	4718947067982
148195	PCHA-S-762MH	MH	Fast	7'6" / 228 cm	2	7-28g	8+Tip	4718947068040
148192	PCHA-S-802M	M	Fast	8'0" / 243 cm	2	7-28g	8+Tip	4718947067999
148193	PCHA-S-802MH	MH	Fast	8'0" / 243 cm	2	15-40g	8+Tip	4718947068002
148194	PCHA-S-802XH	XH	Fast	8'0" / 243 cm	2	30-80g	8+Tip	4718947068019

## GUIDE SELECT

Okuma's Guide Select series covers a range of fishing techniques with professional-level performance provided by carefully selected components. From blanks with high-quality Japanese carbon and Okuma's UFR® tip technology to Sea Guide® line guides, the Guide Select Series is for those who want the equipment specifically designed for their style of fishing.

## FEATURES

- 30t and 30+40t carbon
- Seaguide SS with Zirconia insert
- Fuji VSS reel seat for spinning
- Fuji TCSM reel seat for casting
- UFR Tip technology
- Premium EVA Grip



142202



142354

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode	
<b>Guide Select Drop Shot Spinning</b>									
● 137143	GS-S-732La-1	L	Fast	7'3" / 220 cm	2pcs	3-15g	9+1	4718947092823	
● 137141	GS-S-792MLa-1	ML	Fast	7'9" / 235 cm	2pcs	7-21g	9+1	4718947092830	
<b>Guide Select Finesse Spinning</b>									
● 142202	GS-S-732ML-1	ML	Fast	7'3" / 220 cm	2pcs	7-21g	8+1	4718947093073	
● 142203	GS-S-832L-1	L	Fast	8'3" / 251 cm	2pcs	3-15g	9+1	4718947093080	
● 142204	GS-S-832ML-1	ML	Fast	8'3" / 251 cm	2pcs	7-21g	9+1	4718947093097	
<b>Guide Select Heavy Spinning</b>									
● 137125	GS-S-662H-1	H	Fast	6'6" / 197 cm	2pcs	20-50g	7+1	4718947092977	
● 142206	GS-S-732XH-1	XH	Fast	7'3" / 220 cm	2pcs	30-60g	8+1	4718947092984	
● 142207	GS-S-732XXH-1	XXH	Fast	7'3" / 220 cm	2pcs	40-100g	8+1	4718947092991	
● 142208	GS-S-862XH-1	XH	Fast	8'6" / 259 cm	2pcs	40-90g	8+1	4718947093004	
● 142209	GS-S-862XXH-1	XXH	Fast	8'6" / 259 cm	2pcs	60-120g	8+1	4718947093011	
● 137126	GS-S-862XXXH-1	XXXH	Fast	8'6" / 259 cm	2pcs	80-160g	8+1	4718947093028	
<b>Guide Select Light Finesse Spinning</b>									
● 142356	GS-S-662XUL-1	XUL	Moderate Fast	6'6" / 197 cm	2pcs	1-6g	7+1	4718947093035	
● 137146	GS-S-662L-1	L	Moderate Fast	6'6" / 197 cm	2pcs	5-10g	7+1	4718947093059	
● 142357	GS-S-662UL-1	UL	Moderate Fast	6'6" / 197 cm	2pcs	3-9g	7+1	4718947093042	
● 142210	GS-S-732L-1	L	Fast	7'3" / 220 cm	2pcs	5-10g	8+1	4718947093066	
<b>Guide Select Long Distance Spinning</b>									
● 142211	GS-S-902H-1	H	Fast	9'0" / 274 cm	2pcs	20-50g	9+1	4718947093158	
● 137110	GS-S-902L-1	L	Moderate Fast	9'0" / 274 cm	2pcs	5-20g	9+1	4718947093110	
● 137121	GS-S-902M-1	M	Moderate Fast	9'0" / 274 cm	2pcs	10-28g	9+1	4718947093134	
● 142359	GS-S-902MH-1	MH	Moderate Fast	9'0" / 274 cm	2pcs	14-40g	9+1	4718947093141	
● 137120	GS-S-902ML-1	ML	Moderate Fast	9'0" / 274 cm	2pcs	7-25g	9+1	4718947093127	
● 137124	GS-S-932M-1	M	Fast	9'3" / 281 cm	2pcs	10-28g	10+1	4718947093172	
● 137123	GS-S-932ML-1	ML	Fast	9'3" / 281 cm	2pcs	7-23g	10+1	4718947093165	
● 142212	GS-S-1002M-1	M	Fast	10'0" / 304 cm	2pcs	12-35g	11+1	4718947093189	
<b>Guide Select Spinning</b>									
● 137147	GS-S-662M-1	M	Fast	6'6" / 197 cm	2pcs	7-21g	7+1	4718947092915	



Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
<b>Guide Select Spinning</b>								
● 137145	GS-S-662MH-1	MH	Moderate Fast	6'6" / 197 cm	2pcs	10-30g	7+1	4718947092922
● 137144	GS-S-732M-1	M	Moderate Fast	7'3" / 220 cm	2pcs	7-21g	8+1	4718947092939
● 142360	GS-S-732MH-1	MH	Moderate Fast	7'3" / 220 cm	2pcs	10-30g	8+1	4718947092946
● 142361	GS-S-832M-1	M	Fast	8'3" / 251 cm	2pcs	7-21g	9+1	4718947092953
● 142214	GS-S-832MH-1	MH	Fast	8'3" / 251 cm	2pcs	10-30g	9+1	4718947092960
<b>Guide Select Vertical Spinning</b>								
● 137137	GS-S-662MHa-1	MH	Fast	6'6" / 197 cm	1+1pcs	15-40g	7+1	4718947093295
● 137127	GS-S-662MLa-1	H	Fast	6'6" / 197 cm	1+1pcs	5-20g	7+1	4718947093288
<b>Guide Select Big Bait Casting</b>								
● 142354	GS-C-802XH-1	XH	Moderate Fast	8'0" / 243 cm	1+1pcs	40-190g	9+1	4718947092748
● 137113	GS-C-802XXH-1	XXH	Moderate Fast	8'0" / 243 cm	1+1pcs	70-140g	9+1	4718947092755
● 137077	GS-C-802XXXH-1	XXXH	Moderate Fast	8'0" / 243 cm	1+1pcs	120-190g	9+1	4718947092762
<b>Guide Select Casting</b>								
● 142199	GS-C-702M-1	M	Fast	7'0" / 212 cm	2pcs	10-30g	10+1	4718947092854
● 142200	GS-C-702ML-1	ML	Fast	7'0" / 212 cm	2pcs	7-21g	10+1	4718947092847
<b>Guide Select Crank Casting</b>								
● 137142	GS-C-762M-1	M	Moderate Fast	7'6" / 228 cm	2pcs	8-28g	10+1	4718947092786
● 142355	GS-C-762MH-1	MH	Moderate Fast	7'6" / 228 cm	2pcs	15-35g	10+1	4718947092793
<b>Guide Select Heavy Casting</b>								
● 137118	GS-C-732H-1	H	Fast	7'3" / 220 cm	2pcs	20-50g	8+1	4718947092861
● 142205	GS-C-732XXH-1	XXH	Fast	7'3" / 220 cm	2pcs	40-90g	8+1	4718947092878
● 137138	GS-C-732XXXH-1	XXXH	Fast	7'3" / 220 cm	2pcs	60-120g	8+1	4718947092885
● 137119	GS-C-862XXH-1	XH	Fast	8'6" / 259 cm	2pcs	60-120g	9+1	4718947092892
● 137139	GS-C-862XXXH-1	XXXH	Fast	8'6" / 259 cm	2pcs	80-140g	9+1	4718947092908
<b>Guide Select Jerk Casting</b>								
● 137099	GS-C-662XXH-1	ML	Moderate Fast	6'6" / 197 cm	1+1pcs	60-100g	8+1	4718947092809
● 137100	GS-C-692XXXH-1	XXH	Moderate Fast	6'9" / 204 cm	1+1pcs	80-140g	8+1	4718947092816
<b>Guide Select Monster Bait Casting</b>								
● 142213	GS-C-862XXHa-1	XXH	Moderate Fast	8'6" / 259 cm	2pcs	100-212g	9+1	4718947092779
<b>Guide Select Vertical Casting</b>								
● 137131	GS-C-662Ha-1	H	Fast	6'6" / 197 cm	1+1pcs	20-70g	8+1	4718947093318
● 137098	GS-C-662MHa-1	MH	Fast	6'6" / 197 cm	1+1pcs	15-40g	8+1	4718947093301
<b>Guide Select Finesse Spinning</b>								
● 142201	GS-S-704ML-1	L	Fast	7'0" / 212 cm	4pcs	5-20g	8+1	4718947093196
<b>Guide Select Heavy Spinning</b>								
● 137096	GS-S-704H-1	H	Fast	7'0" / 212 cm	4pcs	20-50g	8+1	4718947093226
● 137097	GS-S-804XH-1	XH	Fast	8'0" / 243 cm	4pcs	30-70g	8+1	4718947093257
<b>Guide Select Long Distance Spinning</b>								
● 142358	GS-S-802ML-1	ML	Moderate Fast	8'0" / 243 cm	2pcs	7-21g	8+1	4718947093103
● 137088	GS-S-934ML-1	ML	Fast	9'3" / 281 cm	4pcs	7-28g	10+1	4718947093264
● 137089	GS-S-1004M-1	M	Fast	10'0" / 304 cm	4pcs	15-40g	11+1	4718947093271
<b>Guide Select Spinning</b>								
● 137106	GS-S-704M-1	M	Fast	7'0" / 212 cm	4pcs	7-28g	8+1	4718947093202
● 137107	GS-S-704MH-1	MH	Fast	7'0" / 212 cm	4pcs	14-42g	8+1	4718947093219
● 137108	GS-S-804M-1	M	Moderate Fast	8'0" / 243 cm	4pcs	7-28g	8+1	4718947093233
● 137109	GS-S-804MH-1	MH	Fast	8'0" / 243 cm	4pcs	14-42g	8+1	4718947093240

## SPINNING

## EPIXOR

The new Epixor Inshore utilizes the latest technology to deliver a durable and functional series of inshore spinning rods. The Epixor Inshore is built with a lightweight and responsive 24-ton carbon blank that allows you to feel the lightest of bites while providing the strength to control large fish.

## FEATURES

- Unique use of Bopp (Biaxially Oriented Polypropylene) Blank protection Flim
- Bopp is a 2 way stretch film, that protect the carbon blank from damage, during use and transportation
- Bopp can be recycled
- Slim, Light and Balanced blanks
- 30 and 36T Korean carbon material
- Unique Light wieht ergonomic touch blank reel seats
- AAA grade cork handles
- Coil control guide system



136739

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode	
Epixor									
136739	EPI-S-662L-1	L	Fast	6'6" / 198 cm	2pcs	2-12g	6+1	4718947025739	
136740	EPI-S-702L-1	L	Fast	7'0" / 210 cm	2pcs	3-18g	7+1	4718947025746	
136320	EPI-S-742M-1	M	Fast	7'4" / 223 cm	2pcs	10-32g	7+1	4718947025753	
136321	EPI-S-802L-1	L	Fast	8'0" / 240 cm	2pcs	5-20g	7+1	4718947025760	
136322	EPI-S-822ML-1	ML	Fast	8'2" / 249 cm	2pcs	10-32g	7+1	4718947025777	
136323	EPI-S-862M-1	M	Fast	8'6" / 258 cm	2pcs	15-40g	8+1	4718947025784	
136332	EPI-S-902L-1	L	Fast	9'0" / 270 cm	2pcs	5-25g	8+1	4718947025791	
136750	EPI-S-902MH-1	MH	Fast	9'0" / 270 cm	2pcs	30-70g	8+1	4718947053350	
136741	EPI-S-922ML-1	ML	Fast	9'2" / 276 cm	2pcs	10-32g	8+1	4718947025807	
136742	EPI-S-962M-1	M	Fast	9'6" / 288 cm	2pcs	15-50g	8+1	4718947025814	
136743	EPI-S-1002ML-1	ML	Fast	10'0" / 300 cm	2pcs	10-40g	8+1	4718947025821	
136744	EPI-S-1153M-1	M	Fast	11'5" / 345 cm	3pcs	20-50g	10+1	4718947028549	
Epixor Travel Spin									
136745	EPI-S-904L	L	Fast	9'0" / 270 cm	4pcs	7-24g	8+1	4718947036995	
136747	EPI-S-964ML	ML	Fast	9'6" / 288 cm	4pcs	10-32g	8+1	4718947037015	
136748	EPI-S-1004ML	ML	Fast	10'0" / 300 cm	4pcs	10-36g	8+1	4718947037022	
136749	EPI-S-1154ML	ML	Fast	11'5" / 345 cm	4pcs	10-35g	10+1	4718947037039	

## SPINNING

## G-CONTROL

Ultra-light high modulus carbon blank construction • UFR sensitive tip and crossed carbon thread improve lifting power and maximum strength • All rods have been designed for specific trout fishing • Seaguide XO anti-tangle 316-stainless steel guides • Zirconium guides inserts reduce friction • Light weight ergonomic touch blank reel seats • Ergonomic shaped, hard EVA handles • EVA split grip and EVA fore grip for reduced weight and feel • High quality cloth bag package



148134

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148134	GCT-S-612XUL	XUL	Fast	6'1" / 183 cm	2pcs	0.6-3g	6+1	4718947035592
148118	GCT-S-622L	L	Fast	6'2" / 186 cm	2pcs	1-4g	7+1	4718947027382
148115	GCT-S-702L	L	Fast	7'0" / 210 cm	2pcs	1-8g	8+1	4718947024527
148116	GCT-S-802L	L	Fast	8'0" / 240 cm	2pcs	1-8g	8+1	4718947024534

**SPINNING**

**HELIOS SX**

The Helios SX rods were designed with the latest technology and insight from leading bass anglers. The backbone of the Helios SX rods is the ultra-responsive and durable 30-ton carbon blank construction. This 30-ton carbon construction gives these rods the sensitivity you need to feel each bump and tick as you retrieve your bait. The Helios SX rods bring their lightweight technology into twelve key spinning and baitcast models. With five spinning models from 6-foot 9-inches to 7-foot 2-inches and light to medium heavy actions, they have you covered in your drop shop or other key spinning applications. The series also has seven casting models from 7-foot to 7-foot 6-inches and medium to heavy actions.

**FEATURES**

- 30T carbon construction
- Slim blanks with fast action
- Japanese split EVA handles
- Ergonomic touch blank screw-up reel seat
- CCS SIC Gunsmoke guides
- Customized Okuma butt cap
- Delivered in cloth bag



Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
<b>Helios SX Spinning</b>								
136324	HSX-S-702L	L	Fast	7'0" / 213 cm	2pcs	4-15g	7+1	4718947038067
136325	HSX-S-702ML	ML	Fast	7'0" / 213 cm	2pcs	8-20g	7+1	4718947038074
142032	HSX-S-742M	M	Fast	7'4" / 223 cm	2pcs	12-35g	7+1	4718947038104
137067	HSX-S-742MH	MH	Fast	7'4" / 223 cm	2pcs	20-50g	7+1	4718947038111
137244	HSX-S-742ML	ML	Fast	7'4" / 223 cm	2pcs	8-25g	7+1	4718947038098
136327	HSX-S-802M	M	Fast	8'0" / 243 cm	2pcs	15-40g	8+1	4718947038135
136775	HSX-S-802MH	MH	Fast	8'0" / 243 cm	2pcs	20-50g	8+1	4718947038142
136326	HSX-S-802ML	ML	Fast	8'0" / 243 cm	2pcs	8-25g	8+1	4718947038128
136776	HSX-S-902M	M	Fast	9'0" / 274 cm	2pcs	15-45g	8+1	4718947038166
136777	HSX-S-902MH	MH	Fast	9'0" / 274 cm	2pcs	20-60g	8+1	4718947038173
136778	HSX-S-1002M	M	Fast	10'0" / 300 cm	2pcs	20-50g	9+1	4718947038180
136772	HSX-S-602L	L	Fast	6'0" / 180 cm	2pcs	2-10g	6+1	4718947038043
136333	HSX-S-662ML	ML	Fast	6'6" / 197 cm	2pcs	7-18g	6+1	4718947038050
137070	HSX-S-701M	M	Fast	7'0" / 212 cm	1pc	7-28g	7+1	4718947067920
136773	HSX-S-702M	M	Fast	7'0" / 213 cm	2pcs	10-30g	7+1	4718947038081
136328	HSX-S-902ML	ML	Fast	9'0" / 274 cm	2pcs	8-25g	8+1	4718947038159
<b>Helios SX Cast</b>								
149421	HSX-C-662ML	ML	Fast	6'6" / 197 cm	2pcs	7-18g	9+1	4718947038197
136936	HSX-C-702ML-1	ML	Fast	7'0" / 212 cm	2pcs	5-25g	9+1	4718947041005
136937	HSX-C-762M-1	M	Fast	7'6" / 228 cm	2pcs	10-35g	10+1	4718947041012



**SPINNING**

**ECLIPZ**

High modulus carbon blank • Deep sea black guides with Titanium Oxide inserts • Ergonomic shaped, Hard EVA handles • Strong Okuma graphite DPS reel seat  
 • Split handle design for reduced weight and add comfort • Aluminium Butt cap • Delivered in quality cloth bag



142259

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
142259	EC-S-612M	M	Fast	6'1" / 185 cm	1+1pcs	50-100g	6+1	4718947965196
148145	EC-S-662M	M	Fast	6'6" / 198 cm	1+1pcs	70-140g	6+1	4718947042484

**SPINNING**

**TOMCAT**

Responsive and durable 24T carbon blank construction • Heavy duty matt gunsmoke SIC guides • CCS Seaguide for Vertical item • Strong graphite reel seat with cushions • Rubber round butt cap • 4 series covering all type of carfish disciplines • Supplied in quality cloth bag



148153



148170

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148153	TMC-S-702MH	MH	Fast	7'0" / 213 cm	2pcs	60-160g	6+1	4718947048868
148154	TMC-S-802MH	MH	Fast	8'0" / 244 cm	2pcs	60-160g	6+1	4718947048875
148172	TMC-S-902M	M	Fast	9'0" / 274 cm	2pcs	40-120g	6+1	4718947055613
148155	TMC-S-902MH	MH	Fast	9'0" / 274 cm	2pcs	60-160g	6+1	4718947048882
148156	TMC-S-902XH	XH	Fast	9'0" / 274 cm	2pcs	200-300g	6+1	4718947048905
148170	TMC-S-902H	H	Fast	9'0" / 274 cm	2pcs	150-280g	6+1	4718947053404
148157	TMC-S-992XH	XH	Fast	9'9" / 298 cm	2pcs	200-300g	7+1	4718947048912

# PSYCHO PERCH

Okuma Psycho Perch Rod features ultra-light high-modulus carbon blank construction, and ultimate flex reinforced (UFR®) rod tip technology that increases the rod's lifting power and maximum strength. The rod covers all European styles of perch fishing.

## FEATURES

- Ultra-light high modulus carbon blank construction
- UFR: Ultimate Flex Reinforced rod tip technology
- New exclusive psychedelic blank artwork
- CCS Seaguide, 316 stainless steel frame SIC guide
- View blank screw down reel seat
- 3 split EVA handle with rubber cork inserts
- Covering all European styles of perch fishing
- High quality cloth bag



136804



136800

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode	
<b>Psycho Perch Spinning</b>									
136804	PSY-S-632ULa	UL	Fast	6'3" / 190 cm	2pcs	1-8g	7+1	4718947067470	
136802	PSY-S-732La	L	Fast	7'3" / 220 cm	2pcs	3-18g	8+1	4718947055514	
136803	PSY-S-772La	L	Fast	7'7" / 230 cm	2pcs	2-12g	9+1	4718947055521	
136805	PSY-S-772ULa	UL	Fast	7'7" / 230 cm	2pcs	1-8g	9+1	4718947067487	
136806	PSY-S-892La	L	Fast	8'9" / 267 cm	2pcs	2-12g	10+1	4718947067494	
<b>Psycho Perch UFR Spinning</b>									
136329	PSY-S-632UL	UL	Fast	6'3" / 190 cm	2pcs	1-8g	7+1	4718947048554	
136794	PSY-S-632L	L	Fast	6'3" / 190 cm	2pcs	2-12g	7+1	4718947048561	
136795	PSY-S-632ML	ML	Fast	6'3" / 190 cm	2pcs	3-18g	7+1	4718947048578	
136330	PSY-S-732L	L	Fast	7'3" / 220 cm	2pcs	3-18g	8+1	4718947048585	
136797	PSY-S-732M	M	Fast	7'3" / 220 cm	2pcs	7-32g	8+1	4718947048608	
136796	PSY-S-732ML	ML	Fast	7'3" / 220 cm	2pcs	4-24g	8+1	4718947048592	
136331	PSY-S-772UL	UL	Fast	7'7" / 230 cm	2pcs	1-8g	9+1	4718947048615	
136798	PSY-S-772L	L	Fast	7'7" / 230 cm	2pcs	2-12g	9+1	4718947048622	
136799	PSY-S-772ML	ML	Fast	7'7" / 230 cm	2pcs	3-18g	9+1	4718947048639	
<b>Psycho Perch UFR Casting</b>									
136800	PSY-C-772ML	ML	Fast	7'7" / 230 cm	2pcs	4-24g	10+1	4718947048677	
136801	PSY-C-772M	M	Fast	7'7" / 230 cm	2pcs	7-32g	10+1	4718947048684	

# ALTERA

Okuma Altera rods feature 24T carbon construction, slim blanks with fast action, Japanese split EVA handles.

## FEATURES

- 24T ultra-light carbon blank construction
- Slim blanks with fast action
- Matt Gunsmoke frame SIC guides
- Okuma graphite reel seat
- Aluminum screw end cap with non-skid rubber
- Quality guide cover and cloth bag included



136647



136662

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode	
<b>Altera Spinning</b>									
136647	ALT-S-502UL	UL	X-Fast	5'0" / 150 cm	2pcs	2-7g	5+1	4718947037763	
136648	ALT-S-562L	L	X-Fast	5'6" / 165 cm	2pcs	3-8g	5+1	4718947037770	
136649	ALT-S-602UL	UL	X-Fast	6'0" / 180 cm	2pcs	2-7g	5+1	4718947037787	
136650	ALT-S-602L	L	X-Fast	6'0" / 180 cm	2pcs	4-12g	5+1	4718947037794	
136651	ALT-S-602ML	ML	Fast	6'0" / 180 cm	2pcs	5-20g	5+1	4718947037800	
136652	ALT-S-662ML	ML	Fast	6'6" / 195 cm	2pcs	7-22g	5+1	4718947037817	
136653	ALT-S-662M	M	Fast	6'6" / 195 cm	2pcs	10-30g	5+1	4718947037824	
136654	ALT-S-662MH	MH	Fast	6'6" / 195 cm	2pcs	15-40g	5+1	4718947037831	
136657	ALT-S-702M	M	Fast	7'0" / 210 cm	2pcs	10-30g	6+1	4718947037862	
136658	ALT-S-702MH	MH	Fast	7'0" / 210 cm	2pcs	15-40g	6+1	4718947037879	
136659	ALT-S-702H	H	Fast	7'0" / 210 cm	2pcs	20-60g	6+1	4718947037886	
136656	ALT-S-702ML	ML	Fast	7'0" / 210 cm	2pcs	5-20g	6+1	4718947037855	
148138	ALT-S-742ML	ML	Fast	7'4" / 223 cm	2pcs	8-25g	6+1	4718947037893	
148139	ALT-S-742M	M	Fast	7'4" / 223 cm	2pcs	12-35g	6+1	4718947037909	
142004	ALT-S-742MH	MH	Fast	7'4" / 223 cm	2pcs	20-40g	6+1	4718947037916	
136660	ALT-S-802ML	ML	Fast	8'0" / 240 cm	2pcs	7-28g	7+1	4718947037923	
136661	ALT-S-802M	M	Fast	8'0" / 240 cm	2pcs	15-40g	7+1	4718947037930	
136662	ALT-S-802MH	MH	Fast	8'0" / 240 cm	2pcs	20-45g	7+Tip	4718947037947	
136663	ALT-S-802H	H	Fast	8'0" / 240 cm	2pcs	30-80g	7+1	4718947037954	
136664	ALT-S-902ML	ML	Fast	9'0" / 270 cm	2pcs	5-25g	7+1	4718947037961	
136665	ALT-S-902M	M	Fast	9'0" / 270 cm	2pcs	15-40g	7+1	4718947037978	
136666	ALT-S-902MH	MH	Medium Fast	9'0" / 270 cm	2pcs	20-80g	7+1	4718947037985	
136667	ALT-S-902H	H	Heavy Fast	9'0" / 270 cm	2pcs	30-100g	7+1	4718947037992	
136668	ALT-S-1002MH	MH	Fast	10'0" / 300 cm	2pcs	25-70g	8+1	4718947038005	
<b>Altera Spinning Fuji Guide</b>									
148206	ALT-S-742MH-1	MH	Fast	7'4" / 223 cm	2pcs	15-40g	6+1	4718947082398	
148207	ALT-S-802MH-1	MH	Fast	8'0" / 240 cm	2pcs	15-40g	7+1	4718947082404	
148208	ALT-S-902MH-1	MH	Fast	9'0" / 270 cm	2pcs	15-60g	7+1	4718947082411	
149419	ALT-S-1002MH-1	MH	Fast	10'0" / 300 cm	2pcs	25-70g	8+Tip	4718947082428	



Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
<b>Altera Travel</b>								
136669	ALT-S-704MH	MH	Fast	7'0" / 213 cm	Travel	15-40g	8+1	4718947048455
136670	ALT-S-704H	H	Fast	7'0" / 213 cm	Travel	20-60g	8+1	4718947048462
136671	ALT-S-704XH	XH	Fast	7'0"/213 cm	Travel	30-80g	6+Tip	4718947048479
136672	ALT-S-804H	H	Fast	8'0" / 244 cm	Travel	40-80g	8+1	4718947048486

**SPINNING & CASTING**

**ALARIS**

Okuma Alaris Spin rods feature 24T carbon construction, slim blanks with fast action, SCT Solid Carbon Tip on Light Jig versions.

**FEATURES**

- 24T carbon construction
- Slim blanks with fast action
- SCT Solid Carbon Tip on Light Jig versions
- Rubber cork butt
- Ergonomic touch reel seat
- CCS SIC gunsmoke guides
- Delivered in cloth bag



Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
<b>Alaris Spinning</b>								
136637	ALA-S-602L	L	X-Fast	6'0" / 180 cm	2pcs	2-7g	4+1	4718947025883
136638	ALA-S-612ML	ML	Fast	6'1" / 185 cm	2pcs	5-15g	4+1	4718947025890
136639	ALA-S-632M	M	Fast	6'3" / 190 cm	2pcs	10-32g	4+1	4718947025906
136641	ALA-S-712M	M	Fast	7'1" / 213 cm	2pcs	10-32g	4+1	4718947025913
136310	ALA-S-712ML	ML	Fast	7'1" / 213 cm	2pcs	5-22g	4+1	4718947025920
136311	ALA-S-742M	M	Fast	7'4" / 223 cm	2pcs	10-32g	4+1	4718947025937
136642	ALA-S-742MH	MH	Fast	7'4" / 223 cm	2pcs	15-40g	4+1	4718947025944
136312	ALA-S-822ML	ML	Fast	8'2" / 249 cm	2pcs	10-32g	5+1	4718947025951
136643	ALA-S-862MH	MH	Fast	8'6" / 258 cm	2pcs	20-60g	5+1	4718947025968
136313	ALA-S-902ML	ML	Medium Fast	9'0" / 270 cm	2pcs	7-28g	5+1	4718947025975
136644	ALA-S-1012M	M	Fast	10'1" / 302 cm	2pcs	15-45g	5+1	4718947025982
<b>Alaris Light Jig Spin</b>								
136989	ALS-S-802UL	UL	Fast	8'0" / 240 cm	2pcs	up to 12g	7+1	4718947038203
136990	ALS-S-902UL	UL	Fast	9'0" / 270 cm	2pcs	up to 15g	8+1	4718947038210
<b>Alaris Soft Lure Spin</b>								
137032	ALS-S-802L	L	Fast	8'0" / 240 cm	2pcs	5-15g	7+1	4718947038227
137036	ALS-S-802ML	ML	Fast	8'0" / 240 cm	2pcs	7-25g	7+1	4718947038241
137037	ALS-S-902L	L	Fast	9'0" / 270 cm	2pcs	5-15g	8+1	4718947038234
137033	ALS-S-902ML	ML	Fast	9'0" / 270 cm	2pcs	7-28g	8+1	4718947038258
<b>Alaris Zander Spin</b>								
137039	ALS-S-802M	M	Fast	8'0" / 240 cm	2pcs	10-35g	7+1	4718947038265
136986	ALS-S-902M	M	Fast	9'0" / 270 cm	2pcs	10-35g	8+1	4718947038272
<b>Alaris Casting</b>								
137056	ALA-C-632M	M	Fast	6'3" / 190 cm	2pcs	10-32g	8+1	4718947026002

**SPINNING**

**COMPETITION**

24T carbon blank construction • Stainless steel guide frames • Durable titanium oxide guide inserts • Stainless steel hooded reel seat with Okuma tooling logo • Split grip butt design for reduced weight and improved balance • Comfortable EVA fore and rear grips • Stainless steel hook keeper



148108

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148108	CM-S-662M	M	Fast	6'6" / 198 cm	2pcs	10-30g	5+1	4718947018755
148199	CM-S-702M	M	Fast	7'0" / 213 cm	2pcs	10-30g	6+1	4718947071057
148200	CM-S-762ML	ML	Fast	7'6" / 228 cm	2pcs	8-25g	7+1	4718947071064
148113	CM-S-802ML	ML	Fast	8'0" / 244 cm	2pcs	10-30g	7+1	4718947021915
148112	CM-S-902M	M	Fast	9'0" / 274 cm	2pcs	20-50g	8+1	4718947021908

**SPINNING**

**LRF**

Okuma LRF rods feature OKUMA patent UFR® technology on the tip blank, increased rod's sensitive tip, lifting power and maximum strength.



136932

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136932	LRF-S-702MH	MH	Fast	7'0" / 212 cm	2pcs	10-50g	8+1	4718947018298
136931	LRF-S-802M	M	Fast	8'0" / 240 cm	2pcs	5-25g	9+1	4718947018281

**SPINNING**

**DEAD RINGER**

Light weight 24T carbon Blank construction • Japanese Split handles style • Combines quality Cork and hard EVA handles • Soft pawn grip • Quality reel seat • Light weight SIC Guides • Supplier in rod bag



137063

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
<b>Dead Ringer Spin</b>								
137063	DR-S-602UL	UL	Fast	6'0" / 180 cm	2pcs	0-7g	6+1	4718947976314
136733	DR-S-702UL	UL	Fast	7'0" / 210 cm	2pcs	2-12g	7+1	4718947976321
136735	DR-S-742UL	UL	Fast	7'4" / 223 cm	2pcs	1-8g	7+1	4718947025104
137064	DR-S-802UL	UL	Fast	8'0" / 240 cm	2pcs	2-12g	7+1	4718947976338
136736	DR-S-902MH	MH	Fast	9'0" / 270 cm	2pcs	10-40g	8+1	4718947025111

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode	
<b>Dead Ringer Trout Spin</b>									
137065	DR-S-702UL TROUT	UL	Fast	7'0" / 210 cm	2pcs	1-5g	8+1	4718947021281	
137066	DR-S-762UL TROUT	UL	Fast	7'6" / 225 cm	2pcs	2-7g	8+1	4718947021298	

**SPINNING**

**SEA TROUT SPIN**

30-Ton Ultra-responsive blank construction • Seaguides XO anti-tangle 316-stainless steel guides • Foregrip specially designed so reel seat threads are not exposed • VA split grip and fore grip for reduced weight and feel • Supplied cloth rod bag



136934

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode	
136934	SEA-S-802M	M	Fast	8'0" / 244 cm	2pcs	10-30g	7+1	4718947035318	
136935	SEA-S-902M	M	Fast	9'0" / 274 cm	2pcs	10-30g	8+1	4718947035325	

**SPINNING**

**AZAKI**

Okuma Azaki Rod is designed to match Azaki spinning reels. Features 24T carbon construction with EPC process, 3 split EVA & cork handle, and SIC guides silver frame.

**FEATURES**

- 24 T Carbon EPC process
- Same blank as Altera
- 3 split handle EVA & Cork
- SIC guides silver frame
- Graphite screw down reel seat with cushions
- Designed to match Azaki spinning reels
- Supplied with a quality rod bag



136687

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode	
136687	AZK-S-602ML	ML	Fast	6'0" / 183 cm	2pcs	4-12g	5+1	4718947048691	
136688	AZK-S-662L	L	Fast	6'6" / 198 cm	2pcs	7-22g	5+1	4718947048707	
136689	AZK-S-702M	M	Fast	7'0" / 213 cm	2pcs	10-30g	6+1	4718947048721	
136314	AZK-S-702ML	ML	Fast	7'0" / 213 cm	2pcs	5-20g	6+1	4718947048714	
136690	AZK-S-762M	M	Fast	7'6" / 228 cm	2pcs	12-35g	6+1	4718947048745	
136315	AZK-S-762ML	ML	Fast	7'6" / 228 cm	2pcs	8-25g	6+1	4718947048738	
136317	AZK-S-802M	M	Fast	8'0" / 244 cm	2pcs	12-35g	7+1	4718947048769	
136316	AZK-S-802ML	ML	Fast	8'0" / 244 cm	2pcs	7-28g	7+1	4718947048752	
136691	AZK-S-902H	H	Fast	9'0" / 274 cm	2pcs	20-60g	7+1	4718947048783	
136318	AZK-S-902M	M	Fast	9'0" / 274 cm	2pcs	12-35g	7+1	4718947048776	
136319	AZK-S-902ML	ML	Fast	9'0" / 274 cm	2pcs	7-28g	7+1	4718947051868	
136693	AZK-S-962ML	ML	Fast	9'6" / 286 cm	2pcs	7-28g	9+1	4718947067456	
136694	AZK-S-1002ML	ML	Fast	10'0" / 305 cm	2pcs	10-30g	9+1	4718947067463	





## SPINNING

## PINK PEARL

24T carbon construction • SIC guides silver frame • Modern graphite screw reel seat • Okuma butt cap logo • Designed to match to Pink Pear V2 reels • Supplied with a quality rod bag



148220

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148220	PP-S-712ML	ML	Fast	7'1" / 215 cm	2pcs	5-20g	7+1	4718947963789
136790	PP-S-712ML V2	ML	Fast	7'1" / 213 cm	2pcs	5-20g	7+1	4718947049247
142038	PP-S-822M	M	Fast	8'2" / 249 cm	2pcs	10-32g	7+1	4718947963796
136791	PP-S-822M V2	M	Fast	8'2" / 249 cm	2pcs	10-32g	7+1	4718947049254

## SPINNING

## SAFINA-X

24T carbon construction • SIC guides silver frame • Modern graphite screw reel seat • Okuma butt cap logo • Designed to match to Pink Pear V2 reels • Supplied with a quality rod bag



148142

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148142	SX-S-702M	M	Fast	7'0" / 212 cm	2pcs	10-30g	7+1	4718947042330
137048	SX-S-702MH	MH	Fast	7'0" / 212 cm	2pcs	15-40g	7+1	4718947958716
148218	SX-S-702ML	ML	Fast	7'0" / 212 cm	2pcs	5-20g	7+1	4718947958709
137044	SX-S-802M	M	Fast	8'0" / 243 cm	2pcs	10-36g	7+1	4718947958730
137047	SX-S-802ML	ML	Fast	8'0" / 243 cm	2pcs	5-20g	7+1	4718947958723
137051	SX-S-902M	M	Fast	9'0" / 274 cm	2pcs	10-35g	8+1	4718947958754
137072	SX-S-1002M	M	Fast	10'0" / 303 cm	2pcs	15-50g	9+1	4718947958778






**SPINNING**

**HOT ROD**

High modulus ultra-light carbon blank construction. • Quality stainless steel frame guides. • Special cuffed stainless steel inserts, no popping off. • EVA split grip and fore grip for reduced weight and feel • Foregrip specially designed so reel seat threads are not exposed



136939

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136939	HR-S-602M	M	Fast	6'0" / 180 cm	2pcs	-	5+1	4718947062741 
136940	HR-S-702M	M	Fast	7'0" / 213 cm	2pcs	-	6+1	4718947062758 
136941	HR-S-802M	M	Fast	8'0" / 244 cm	2pcs	-	7+1	4718947062765 







**SPINNING**

**ARIA**

24T GT blank construction. • Light weight SIC guide system • Polished titanium oxide guide inserts • Okuma graphite reel seat • Shaped full EVA handle style • Cloth bag included



136979

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136979	ARA-702M	M	Fast	7'0" / 210 cm	2pcs	10-35g	4+1	4718947026057 
136974	ARA-702UL	UL	Fast	7'0" / 210 cm	2pcs	5-20g	4+1	4718947026040 
136678	ARA-802M	M	Fast	8'0" / 240 cm	2pcs	15-40g	5+1	4718947026071 
136980	ARA-802ML	ML	Fast	8'0" / 240 cm	2pcs	10-30g	5+1	4718947026064 
136679	ARA-902H	H	Fast	9'0" / 270 cm	2pcs	20-60g	5+1	4718947026088 
136680	ARA-902MH	MH	Fast	9'0" / 270 cm	2pcs	7-28g	5+1	4718947028556 

**SPINNING**

**FUEL SPIN**

24T GT blank construction • Fast action • Complete range with 16 lengths and CW possible • Motor sports design inspiration • Pure energy for fishing • 3 Split EVA handle to reduce the weight and good balance • Stainless steel frame SIC guides • Graphite cushions reel seat • Designed to match Okuma Fuel Spin reels



136752

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136752	FSP-S-662L	L	Fast	6'6" / 198 cm	2pcs	3-15g	5+1	4718947049018
136753	FSP-S-662M	M	Fast	6'6" / 198 cm	2pcs	10-30g	5+1	4718947049032
136754	FSP-S-702L	L	Fast	7'0" / 213 cm	2pcs	5-20g	6+1	4718947049056
136755	FSP-S-702M	M	Fast	7'0" / 213 cm	2pcs	10-30g	6+1	4718947049063
137010	FSP-S-702UL	UL	Fast	7'0" / 210 cm	2pcs	0-8g	6+1	4718947058195
137011	FSP-S-762UL	UL	Fast	7'6" / 228 cm	2pcs	2-12g	7+1	4718947058201
136758	FSP-S-802H	H	Fast	8'0" / 244 cm	2pcs	30-80g	7+1	4718947049100
136756	FSP-S-802L	L	Fast	8'0" / 244 cm	2pcs	5-25g	7+1	4718947049087
136757	FSP-S-802M	M	Fast	8'0" / 244 cm	2pcs	15-40g	7+1	4718947049094
136761	FSP-S-902H	H	Fast	9'0" / 274 cm	2pcs	30-100g	7+1	4718947049131
136759	FSP-S-902L	L	Fast	9'0" / 274 cm	2pcs	7-30g	7+1	4718947049117
136760	FSP-S-902M	M	Fast	9'0" / 274 cm	2pcs	20-50g	7+1	4718947049124

**SPINNING**

**WAVE POWER**



24T GT blank construction • Fast action • Stainless steel frame SIC guides • 3 Split EVA handle to reduce the weight and good balance • Graphite cushions reel seat • Telescopic version available • Designed to match Okuma Aria spin reels



142051

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
<b>Wave Power</b>								
142051	WP-S-602L	L	Fast	6'0" / 180 cm	2pcs	2-10g	5+1	4718947049148
148159	WP-S-602M	M	Fast	6'0" / 180 cm	2pcs	5-20g	5+1	4718947049155
148160	WP-S-662L	L	Fast	6'6" / 198 cm	2pcs	3-15g	5+1	4718947049162
142052	WP-S-662M	M	Fast	6'6" / 198 cm	2pcs	10-30g	5+1	4718947049179
148171	WP-S-702H	H	Fast	7'0" / 213 cm	2pcs	20-60g	6+1	4718947054258
142053	WP-S-702L	L	Fast	7'0" / 213 cm	2pcs	4-15g	6+1	4718947049186
148198	WP-S-702M	M	Fast	7'0" / 213 cm	2pcs	10-30g	6+1	4718947068804
142054	WP-S-702UL	UL	Fast	7'0" / 213 cm	2pcs	0-8g	6+1	4718947058218
142055	WP-S-802L	L	Fast	8'0" / 244 cm	2pcs	5-25g	7+1	4718947049209
142056	WP-S-802M	M	Fast	8'0" / 244 cm	2pcs	15-40g	7+1	4718947049216
142057	WP-S-902H	H	Fast	9'0" / 274 cm	2pcs	30-100g	7+1	4718947054265
142058	WP-S-902L	L	Fast	9'0" / 274 cm	2pcs	7-30g	7+1	4718947049223
<b>Wave Power Tele Spin</b>								
136826	WP-S-605M-T	M	Fast	6'0" / 180 cm	tele	5-20g	4+1	4718947051899



Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode	
<b>Wave Power Tele Spin</b>									
136938	WP-S-705M-T	M	Fast	7'0" / 213 cm	tele	10-30g	4+1	4718947054272	
136827	WP-S-806M-T	M	Fast	8'0" / 244 cm	tele	15-40g	5+1	4718947053220	

**SPINNING**

**LIGHT RANGE FISHING**




Okuma have patented the UFR technology – that truly gives an amazing performance on the light range fishing rods.

**FEATURES**

- Light weight 24T carbon material
- Japanese EVA split handle construction
- Okuma quality reel seat
- CCS SIN shooting guides
- Okuma UFR tip strength
- Cloth bag included



136785

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode	
<b>Light Range Fishing Spin</b>									
136785	LRF-S-612L-1	L	Fast	6'1" / 185 cm	2pcs	1-7g	7+1	4718947017840	
136786	LRF-S-712ML-1	ML	Fast	7'1" / 216 cm	2pcs	3-12g	8+1	4718947017857	
136781	LRF-S-812ML-1	ML	Fast	8'1" / 245 cm	2pcs	8-22g	9+1	4718947025838	

**SPINNING**

**LIGHT RANGE FISHING TELE**




Okuma have patented the UFR technology – that truly gives an amazing performance on the light range fishing rods.

**FEATURES**

- Light weight 24T carbon material
- Japanese EVA split handle construction
- Okuma quality reel seat
- CCS SIN shooting guides
- Okuma UFR tip strength
- Cloth bag included



136782

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode	
<b>Light Range Fishing Tele Spin</b>									
136782	LRF-S-605UL-T	UL	Fast	6'0" / 182 cm	tele	1-7g	4+1	4718947025852	
136783	LRF-S-706L-T	L	Fast	7'0" / 212 cm	tele	3-12g	5+1	4718947025869	
136784	LRF-S-766ML-T	ML	Fast	7'6" / 228 cm	tele	8-22g	5+1	4718947025876	







## SPINNING

## G-POWER

- Fast action blank construction - FPS graphite reel seat - High Quality guides - Gimbal butt cap



142049

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
142049	GP-S-702M	M	Fast	7'0" / 210 cm	2pcs	10-35g	5+1	4718947071828 
142050	GP-S-802M	M	Fast	8'0" / 240 cm	2pcs	15-40g	5+1	4718947071026 








## SPINNING

## RODSTER

Super strong composite & graphite blank construction • UFR: Ultimate Flex Reinforced rod tip technology • 15% lighter than Classic UFR rods • Double leg SIC guides • Full EVA handle with Rubber cork top ring • Strong graphite reel seat with cushions and hoods • ABS butt cap on spin models • Soft ABS gimbal on boat models



137076

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
137076	RST-S-702H	H	Fast	7'0" / 213 cm	2pcs	20-60g	5+1	4718947049353 
136807	RST-S-702L	L	Fast	7'0" / 213 cm	2pcs	4-15g	5+1	4718947049339 
136808	RST-S-702M	M	Fast	7'0" / 213 cm	2pcs	10-30g	5+1	4718947049346 
136809	RST-S-802L	L	Fast	8'0" / 244 cm	2pcs	5-20g	5+1	4718947049360 
136811	RST-S-802H	H	Fast	8'0" / 244 cm	2pcs	20-60g	5+1	4718947049384 
136810	RST-S-802M	M	Fast	8'0" / 244 cm	2pcs	10-30g	5+1	4718947049377 
136813	RST-S-902H	H	Fast	9'0" / 274 cm	2pcs	40-80g	5+1	4718947049407 
136812	RST-S-902MH	MH	Fast	9'0" / 274 cm	2pcs	20-60g	5+1	4718947049391 
137071	RST-S-1002H	H	Fast	10'0" / 305 cm	2pcs	40-80g	5+1	4718947049414 



**SPINNING**

**SIIKA**

24T GT blank construction • Saltwater resistant deep press guides • Okuma DPS plate reel seat • Anti slip handle design



136933

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136933	SII-F-802M	M	Fast	8'0" / 240 cm	2pcs	10-35g	9+1	4718947032881

**SPINNING TELE**

**CARBONITE TELE**

Carbon construction • Telescopic 5 to 6 sections for fast action • Double legged SIC guides with rubber shock absorbers • Strong graphite and Alu reel seat with cushions • Leather cloth comfortable handle design • Aluminum screw butt cap



148126

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148126	CAR-S-1186H-T	H	Fast	11'6" / 350 cm	Tele	>140g	5+1	4718947032355
148125	CAR-S-1006H-T	H	Fast	10'0" / 300 cm	Tele	>90g	5+1	4718947032331
148124	CAR-S-1106MH-T	MH	Fast	11'0" / 330 cm	Tele	>140g	5+1	4718947032317
148123	CAR-S-1006MH-T	MH	Fast	10'0" / 300 cm	Tele	>60g	5+1	4718947032300
148122	CAR-S-905M-T	M	Fast	9'0" / 270 cm	Tele	>60g	3+1	4718947032287
148121	CAR-S-805M-T	M	Fast	8'0" / 240 cm	Tele	>60g	3+1	4718947032270





**TROLLING**

**MAKAIRA SALTWATER RODS**



Carbon composite rod blank technology • ALPS deep press 316 stainless guide frames • Hard Zirconium guide inserts for compatibility with braided lines • Custom ALPS aluminum reel seats with Abalone under lay • IGFA tournament rods with full straight or bent aluminum rod butts • Shrink tube grips for ultimate durability • ALPS roller guides on trolling rods with large knot clearance • Aluminum gimbals on trolling and popping rods • Integrated rubber butt cap/gimbal design on all casting and spinning rods • Custom abalone decoration above fore grip • Custom leather wrapped fore grip on IGFA Stand Up rods • C ALPS aluminum butt section • D Bent butt section



136788



136789

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Line Weight	Number of Guides	Barcode
136788	MAK-TR-5101-80S	MH	Fast	5'10" / 178 cm	1pc	80lbs	4+1	4718947969545 
136789	MAK-TR-5101-120B	H	Fast	5'10" / 178 cm	1pc	120lbs	4+1	4718947044839 

**TROLLING**

**SLY**

Durable E-glass blank construction • Fuji K-concept tangle free guides with Alconite inserts • Special spiral guides design for all trolling and tuna rods • ALPS Aluminum reel seat with large knot clearance • Alps Aluminum gimbal



148149

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Line Weight	Number of Guides	Barcode
148149	SLY-C-621H	H	Fast	6'2" / 187 cm	1pc	30-50lbs	8+1	4718947047908
148147	SLY-C-661ML	ML	Fast	6'6" / 197 cm	1pc	6-8lbs	9+1	4718947046901
148132	SLY-C-621M	M	Fast	6'2" / 187 cm	1pc	12-20lbs	8+1	4718947035561
148133	SLY-C-621MH	MH	Fast	6'2" / 187 cm	1pc	20-30lbs	8+1	4718947035578

**TROLLING**

**NEW**

**COLD WATER IN-LINE**

Designed for freshwater trolling, the Okuma Cold Water inline rod's moderate action and powerful and responsive 24-ton carbon blank are optimal for targeting agile and vigorous fish like salmon. The inline design of the Cold Water allows for a flexible structure with an even distribution of force when fighting the fish. The high-quality tip guide line material ensures the line endures stretch and stress without breaking.

**FEATURES**

- 24T Carbon Blank
- Fuji® DPS Reel Seat with Aluminum Double Lock
- Premium EVA Grip
- Anatomic Front Grip



142216

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Line Weight	Number of Guides	Barcode
<b>Cold Water Inline Trolling</b>								
● 142216	CW-C-732M-1	M	Moderate	7'3" / 220cm	1+1	10-25lbs	2+1	4718947092687
● 142220	CW-C-802M-1	M	Moderate	8'1" / 245cm	1+1	10-25lbs	2+1	4718947092694

**BOAT**

**SOLTERRA BOAT**

Durable E-glass blank construction • ALPS high-rise stainless guides frame with Zirconium guides inserts • ALPS Aluminum reel seat with large knot clearance • Durable 3 split EVA handle design • Alps Aluminum gimbal with protect cap



137074

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
137060	SLT-C-762MH	MH	Fast	7'6" / 228 cm	1+1pcs	30-50g	8+1	4718947952790
136819	SLT-C-762M	M	Fast	7'6" / 228 cm	1+1pcs	20-30g	8+1	4718947952783
137074	SLT-C-561MH	MH	Fast	5'6" / 168 cm	1pc	-	5+1	4718947952752
137075	SLT-C-762H	H	Fast	7'6" / 228 cm	1+1pcs	-	8+1	4718947021366

RED = New 2023










## BOAT

## CORTEZ BOAT

Light weight, high modulus carbon fiber blanks • Stainless steel highrise guide frames with SIC rings • Deluxe Okuma silver label reel seats • Hard, durable EVA handle • Okuma rubber gimbal for sea fishing • High quality cloth bag package • 3-sec rods supplied in deluxe travel bag



136725

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136725	CZ-C-662M	M	Fast	6'6" / 198 cm	2pcs	-	8+1	4718947018144 
136726	CZ-C-662MH	MH	Fast	6'6" / 198 cm	2pcs	-	8+1	4718947018151 
136730	CZ-C-663M	M	Fast	6'6" / 198 cm	3pcs	-	8+1	4718947018205 
136731	CZ-C-663MH	MH	Fast	6'6" / 198 cm	3pcs	-	8+1	4718947018212 
136728	CZ-C-742M	M	Fast	7'4" / 223 cm	2pcs	-	9+1	4718947018182 
136729	CZ-C-742MH	MH	Fast	7'4" / 223 cm	2pcs	-	9+1	4718947018199 
136727	CZ-C-742ML	ML	Fast	7'4" / 223 cm	2pcs	12-20g	9+1	4718947018175 



## BOAT

## RODSTER BOAT

Super strong composite & graphite blank construction • UFR: Ultimate Flex Reinforced rod tip technology • 15% lighter than Classic UFR rods • Double leg SIC guides • Full EVA handle with Rubber cork top ring • Strong graphite reel seat with cushions and hoods • ABS butt cap on spin models • Soft ABS gimbal on boat models



136987

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136987	RST-C-602M Boat	M	Fast	6'0" / 183 cm	2pcs	-	6+1	4718947049421 
136988	RST-C-702M Boat	M	Fast	7'0" / 213 cm	2pcs	-	6+1	4718947049438 


## BOAT

## CATALINA BOAT

E-glass blank construction for maximum durability • Heavy duty double foot guide frame • Polished titanium oxide guide inserts • Okuma DPS graphite reel seat • EVA fore and rear grips for maximum durability • Special cutting flat design on fore grip on application • Machined aluminum gimbal with EVA cap • High strength quality cloth bag



137068




Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
137068	CT-C-662MH	MH	Fast	6'6" / 198 cm	1+1pcs	-	7+1	4718947080585 

**BOAT****CLASSIC BOAT**

Shaped Japanese EVA Handle • Okuma Quality Reel seat • Okuma Gimbal but cap • Quality saltwater resistant components • Mixed strengthened blanks • UFR strengthened blanks • Strong rod bag



137006


Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
137006	CLA-C-663H	H	Fast	6'6" / 198 cm	travel	-	8+1	4718947010902 
137005	CLA-C-663MH	MH	Fast	6'6" / 198 cm	travel	-	8+1	4718947010896 
137012	CLA-C-663XH	XH	Fast	6'6" / 198 cm	travel	-	8+1	4718947010919 

**TROLLING****SALAR TROLL**

Responsive and durable 30T carbon blank construction. • Heavy duty matt gunsmoke SIC guides. • Strong Fuji graphite reel seat with cushions. • ABS round butt cap. • Supplied in quality cloth bag.



136824



Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136824	SAL-C-862M	M	Fast	8'6" / 259 cm	2pcs	-	10+1	4718947035523 

**TROLLING****MAGDA FINN TROLL**

E-glass blank construction for maximum durability • Welded stainless steel guides • Painting DPS reel seat with Okuma golden metal label. • EVA fore and rear grips for maximum durability. • Special wave shape design on fore grip on application. • Durable non-skid, rubber gimbal.




136927

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136927	MF-C-702MH	H	Fast	7'0" / 213 cm	2pcs	-	8+1	4718947013231 
136928	MF-C-802MH	H	Fast	8'0" / 244 cm	2pcs	-	8+1	4718947013248 


## TROLLING

## TOURNAMENT TROLLING UFR

Super strong composite & graphite blank construction • UFR: Ultimate Flex Reinforced rod tip technology • Double leg SIC guides • Full EVA handles to reduce the weight • Okuma graphite reel seat with cushions and hoods • ABS butt cap

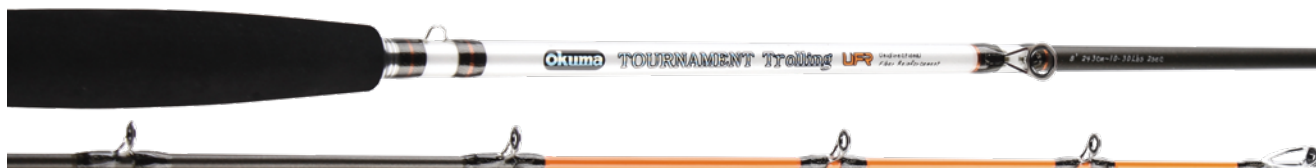

136823

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136823	TOU-C-802M	M	Fast	8'0" / 243 cm	2pcs	-	10+1	4718947017888 


## BOAT

## DEEP SEA BOLENTINO

Responsive and durable 24T carbon blank construction • Heavy duty black SIC guides • Strong graphite reel seat with cushions • Cross shrink handle style • Provide 2 action solid tip • Supplied in quality cloth bag



148127

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148127	DSB-S-902H	H	Fast	9'0" / 270 cm	2pcs	300g	9+1	4718947032362 




## BOAT TELE

## AVENGER TELE BOAT

24T carbon blank construction • Gunsmoke guide frames with Stainless steel insert • Fast action with 3 difference power tips • Okuma branded quality reel seat • Aluminium Butt cap • Supplied in quality cloth bag and tip tube



148111

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148111	AV-S-1005H-T	H	Fast	10'0" / 300 cm	Tele	250g	6+1	4718947021403 
148110	AV-S-804H-T	H	Fast	8'0" / 240 cm	Tele	250g	5+1	4718947021380 
148109	AV-S-704H-T	H	Fast	7'0" / 210 cm	Tele	250g	5+1	4718947021373 




**JIGGING**

**AZORES SLOW JIGGING**

Slim high modulus carbon blank, with power carbon wrap • Split handle ferrule connection, for natural bending and easy transportation • Guides from Fuji KWAG Alconite, anti-tangle and saltwater resistant • Fuji stronger reel seat for sea fishing • Ergonomic shaped, hard EVA handles • Integrated rubber butt cap/gimbal • Delivered in Quality cloth bag



148107

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148107	AZ-S-682MH	MH	Fast	6'8" / 203 cm	1+1pcs	60-140g	6+1	4718947017833 


**JIGGING**

**TOMCAT**

Responsive and durable 24T carbon blank construction • Heavy duty matt gunsmoke SIC guides • CCS Seaguide for Vertical item • Strong graphite reel seat with cushions • Rubber round butt cap • 4 series covering all type of carfish disciplines • Supplied in quality cloth bag



148158

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148158	TMC-S-601MH	MH	Fast	6'0" / 183 cm	1pc	150g	6+1	4718947048936 



**SURF**

**DISTANCE SURF ARENA**

Light weight and responsive HM carbon construction • UFR: Ultimate Flex Reinforcement rod tip technology • Visual blue tip section • Lowrider SIC guides • Anti-slip grip for easy put in/take off • Okuma graphite cushion reel seat • ALPS rubber end cap for anti-slip • Delivered in cloth bag



136991


Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136991	DSA-S-1403H	H	Fast	14'0" / 420 cm	3pcs	100-200g	5+1	4718947038326 
136992	DSA-S-1503H	H	Fast	15'0" / 450 cm	3pcs	100-200g	6+1	4718947038333 

**SURF**

**SURFLINER SURF**

Light weight and responsive HM carbon construction • Quality stainless steel guides • Anti-slip grip for easy put in / take off • Okuma graphite cushion reel seat • ALPS rubber end cap for anti-slip • Delivered in cloth bag



Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
149423	SFL-S-1503H	H	Fast	15'0" / 450 cm	3pcs	100-200g	5+Tip	4718947038319 


**SURF**

**WAVE POWER SURF**

24T GT blank construction • Saltwater resistant deep press guides • Okuma DPS plate reel seat • Anti slip handle design



148263

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148263	WP-S-1403H	H	Fast	14'0" / 420 cm	3pcs	100-200g	5+1	4718947051707 

**SURF**

**AVENGER PRO TELE SURF**

High modulus carbon blank construction • Deep press guide frames with Titanium Oxide inserts • Protected in a quality guide cover • Okuma branded quality reel seat • Anti slip handle design • Supplied in quality cloth bag



148144

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148144	AVP-S-1406H-T	H	Fast	14'0" / 420 cm	Tele	100-200g	4+1	4718947042446 

**SURF TELE**

**AVENGER TELE SURF**

Powerful 24T carbon blank • Strong guide frame with super hard titaniumoxide insert • FUJI reel seat • Comfortable handle design, with high quality • Velvet cloth bag package



136686

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136686	AV-S-1205MH	MH	Fast	12'0"/360 cm	5	60-140g	5+1	4718947021410 



**SURF**

**ALARIS TELE SURF**

Carbon construction • Telescopic 5 sections for fast action • Visual white tip section • Double legged SIC guides with rubber shock absorbers • Okuma graphite and Alu reel seat with cushions • Aluminum screw butt cap • Delivered in cloth bag



136646

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136646	ALS-S-1405H-T	H	Fast	14'0" / 420 cm	Tele	100-200g	4+1	4718947038296 
136645	ALS-S-1305H-T	H	Fast	13'0" / 390 cm	Tele	100-200g	4+1	4718947038289 


**EGING**

**ARIA EGI**

40T Toray ultra-light carbon blank construction • Fuji KR stainless steel frame guides • Fuji Alconite inserts reduce friction • Fuji VSS reel seat, Fuji slidable hook keeper • Ergonomic shaped, split EVA handle design for reduced weight and feel • Durable rubber cork end cap for good balance • High quality cloth bag package



148114

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148114	ARA-S-832M Egi	M	Fast	8'3" / 251 cm	2pcs	Egi#2.0-4.0	8+1	4718947023957 


**EGING**

**BIG SQUID**

E-glass blank with power action • Japanese split EVA handles • Okuma graphite DPS reel seat • Quality SIC stainless stain frame guides • Delivered in cloth bag



148221

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148221	BIG-C-602MH	MH	Fast	6'0" / 180 cm	1+1pcs	30-60g	10+1	4718947965295 



**CARP**

**LS-8K CARP**

Toray 40T high modulus carbon, slim, light and powerful blank construction • Gunsmoke Deep-drawn frame guides with SIC inserts • Fuji TVS and DNPS reel seat • Okuma carbon line clip • Slim cone EVA with durable shrink tube butt handle • Engraved aluminum butt cap • High quality cloth bag



137057

Product Number	Model	Rod Power	Test Curve	Rod Action	Rod Length	Number Of Sections	Number of Guides	Barcode
137057	LS8K-CA-1202XH	XH	3.5lbs	Fast	12'0" / 360 cm	2pcs	5+1	4718947072955 
137043	LS8K-CA-1302XH	XH	3.5lbs	Fast	13'0" / 390 cm	2pcs	5+1	4718947072962 




**CARP**

**8K CARP**

40T Toray carbon material, slim, light and powerful blank construction • Black stainless steel frame guides with SIC inserts • Fuji DPS pate reel seat • Okuma carbon line clip • Slim and Ergonomic shape EVA with durable shrink tube butt handle • Engraved aluminum butt cap • High quality cloth bag



136981

Product Number	Model	Rod Power	Test Curve	Rod Action	Rod Length	Number Of Sections	Number of Guides	Barcode
136981	8K-CA-1002MH	MH	3.0lbs	Medium Fast	10'0" / 300 cm	2pcs	5+1	4718947071408 
136999	8K-CA-1202H	H	3.5lbs	Medium Fast	12'0" / 360 cm	2pcs	5+1	4718947053251 
136995	8K-CA-1302H	H	3.5lbs	Medium Fast	13'0" / 390 cm	2pcs	5+1	4718947055415 



**CARP**

**LS-6K CARP**

Slim and light weight 30T carbon Blank • Exclusive Okuma BOPP blank covering • Okuma DPS reel seat • Okuma carbon line clip • Ergonomic shape EVA with durable shrink tube butt handle • Engraved aluminum butt cap • High quality cloth bag



148202

Product Number	Model	Rod Power	Test Curve	Rod Action	Rod Length	Number Of Sections	Number of Guides	Barcode	
<b>LS-6K Carp</b>									
148202	LS-CA-1002MH	MH	3.0lbs	Fast	10'0" / 300 cm	2pcs	5+1	4718947071415	
137020	LS-CA-1202H	H	3.5lbs	Fast	12'0" / 360 cm	2pcs	5+1	4718947057686	
148173	LS-CA-1202MH	MH	3.0lbs	Fast	12'0" / 360 cm	2pcs	5+1	4718947057440	
137019	LS-CA-1302H	H	3.5lbs	Fast	13'0" / 390 cm	2pcs	5+1	4718947055422	
137021	LS-CA-1303H	H	3.5lbs	Fast	13'0" / 390 cm	3pcs	5+1	4718947055545	
<b>LS-6K Carp Spod</b>									
142037	LS-CA-1202XXH	XXH	5.0lbs	Fast	12'0" / 360 cm	2pcs	5+1	4718947075307	

**CARP**

**CUSTOM BLACK CARP**

Slim and light weight 24T carbon blank • SIC Guides • Heavy Duty Okuma graphite reel seat • Ergonomic shaped EVA with durable shrink tube handle • Supplied in a quality rod bag



137015

Product Number	Model	Rod Power	Test Curve	Rod Action	Rod Length	Number Of Sections	Number of Guides	Barcode	
<b>Custom Black Carp</b>									
137015	CB-CA-1202MH	MH	3.0lbs	Fast	12'0"/360 cm	2pcs	5+1	4718947032126	
137013	CB-CA-1202H	H	3.5lbs	Fast	12'0"/360 cm	2pcs	5+1	4718947032409	
137014	CB-CA-1203H	H	3.5lbs	Fast	12'0"/360 cm	3pcs	5+1	4718947038753	
137007	CB-CA-1302H	H	3.5lbs	Fast	13'0"/390 cm	2pcs	5+1	4718947032133	
137008	CB-CA-1303H	H	3.5lbs	Fast	13'0"/390 cm	3pcs	5+1	4718947038760	
<b>Custom Black Carp Spod</b>									
148120	CB-CA-1202XXH	XXH	5.0lbs	Fast	12'0"/360 cm	2pcs	5+1	4718947032140	
137000	CB-CA-1302XXH	XXH	5.0lbs	Fast	13'0"/390 cm	2pcs	5+1	4718947067623	

## CARP

## EPIX V2 CARP

Fantastic blank construction with SIC guides. • High quality reel seat • Ergo grip construction for extra long casting



148219

Product Number	Model	Rod Power	Test Curve	Rod Action	Rod Length	Number Of Sections	Number of Guides	Barcode
148219	EP-CA-1302H	H	3.5lbs	Fast	13'0" / 390 cm	2pcs	5+1	4718947959188 

## CARP

## C-FIGHT CARP












Light weight 24T carbon blank • Exclusive camouflage blank covering • Minimalistic artwork matching UK codes • Semi matt frame SIC guides • Starting guide 50mm on 12'0" • Slim EVA butt handle • Engraved aluminum butt cap • Graphite reel sat with cushions • Telescopic and Spod versions available



148150



148204

Product Number	Model	Rod Power	Test Curve	Rod Action	Rod Length	Number Of Sections	Number of Guides	Barcode
<b>C-Fight Carp</b>								
148150	CF-CA-802M	M	2.5lbs	Fast	8'0" / 244 cm	2pcs	5+1	4718947048813 
148151	CF-CA-902M	M	2.75lbs	Fast	9'0" / 274 cm	2pcs	5+1	4718947048820 
148152	CF-CA-1002MH	MH	3.00lbs	Fast	10'0" / 305 cm	2pcs	5+1	4718947048837 
137058	CF-CA-1202H	H	3.25lbs	Fast	12'0" / 360 cm	2pcs	5+1	4718947048844 
148177	CF-CA-1202XH	XH	3.50lbs	Fast	12'0" / 360 cm	2pcs	5+1	4718947057976 
148201	CF-CA-1202XXH	XXH	4.5lbs	Fast	12'0" / 360 cm	2pcs	5+1	4718947071071 
137053	CF-CA-1203XH	XH	3.50lbs	Fast	12'0" / 360 cm	3pcs	5+1	4718947071392 
142022	CF-CA-1302XH	XH	3.50lbs	Fast	13'0" / 390 cm	2pcs	6+1	4718947057983 
<b>C-Fight Carp Tele</b>								
148204	CF-CA-1306XH-T	XH	3.5lbs	Fast	13'0" / 390 cm	Tele	6+1	4718947071484 
148203	CF-CA-1206XH-T	XH	3.5lbs	Fast	12'0" / 360 cm	Tele	5+1	4718947071477 
137069	CF-CA-1206H-T	H	3.25lbs	Fast	12'0" / 360 cm	Tele	5+1	4718947048851 





**CARP**

**LONGBOW CARP**

Durable carbon blanks construction • Quality stainless steel minima guides • Okuma DPS pipe reel seat



142035

Product Number	Model	Rod Power	Test Curve	Rod Action	Rod Length	Number Of Sections	Number of Guides	Barcode
<b>Longbow Carp</b>								
142035	LB-CA-1202H	H	3.5lbs	Fast	12'0" / 360 cm	2pcs	5+1	4718947067944 
142036	LB-CA-1302H	H	3.5lbs	Fast	13'0" / 390 cm	2pcs	5+1	4718947067951 
<b>Longbow Carp Tele</b>								
148131	LB-CA-3907H-T	H	3.5lbs	Fast	13'0" / 390 cm	tele	5+1	4718947034274 
148130	LB-CA-3607MH-T	MH	3.0lbs	Fast	12'0" / 360 cm	tele	5+1	4718947034267 

**CARP**








**AVENGER CARP**

Light weight carbon blanks • Quality stainless steel guides • Heavy Duty Okuma graphite reel seat • Supplied in rod bag



136983

148129

Product Number	Model	Rod Power	Test Curve	Rod Action	Rod Length	Number Of Sections	Number of Guides	Barcode
<b>Avenger Carp</b>								
136983	AV-CA-1002MH	MH	3.0lbs	Fast	10'0" / 300 cm	2pcs	5+1	4718947032546 
136998	AV-CA-1202H	H	3.5lbs	Fast	12'0" / 360 cm	2pcs	5+1	4718947032553 
142006	AV-CA-1202MH	MH	3.0lbs	Fast	12'0" / 360 cm	2pcs	5+1	4718947032157 
136997	AV-CA-1203H	H	3.5lbs	Fast	12'0" / 360 cm	2pcs	5+1	4718947032164 
136994	AV-CA-1302H	H	3.5lbs	Fast	13'0" / 390 cm	2pcs	6+1	4718947032171 
<b>Avenger Carp Tele</b>								
148129	AV-CA-1206H-T	H	3.5lbs	Fast	12'0" / 360 cm	Tele	5+1	4718947032539 
148262	AV-CA-1206MH-T	MH	3.5lbs	Fast	12'0" / 360 cm	Tele	5+1	4718947042460 

## MATCH/FEEDER

## 8K FEEDER

Ultra light 40T carbon blank construction • Faster action with 2 different power tips • Black frame SIC guides • Fuji DPS plate reel seat • AAA cork quality full handle • High quality rods bags



137004

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
137004	8K-F-1203MH	MH	Fast	12'0" / 360 cm	3pcs	40-80g	13+1	4718947067593
137042	8K-F-1303MH	MH	Fast	13'0" / 390 cm	3pcs	40-80g	14+1	4718947067609
148260	8K-F-1002M	M	Fast	10'0" / 300 cm	2pcs	30g	12+1	4718947067562
148261	8K-F-1102M	M	Fast	11'0" / 330 cm	2pcs	45g	12+1	4718947067579
136975	8K-F-1203H	H	Fast	12'0" / 360 cm	3pcs	60-120g	13+1	4718947053381
136976	8K-F-1303H	H	Fast	13'0" / 390 cm	3pcs	60-120g	14+1	4718947053398
137038	8K-F-1403XH	XH	Fast	14'0" / 420 cm	3pcs	150g	15+1	4718947067616

## FEEDER

## SOLITRON

24t (IM6 Carbon) construction • Cork/Eva handle • Screw down R/S • Titanium Oxide Guide Inserts • Aluminium Butt cap • 3 Interchangeable tips 5 Models 330-390 cm



142041

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
Solitron Feeder								
142041	SO-F-1103MH	MH	Fast	11'0" / 330 cm	3pcs	30-70g	12+1	4718947959065
137046	SO-F-1203H	H	Fast	12'0" / 360 cm	3pcs	50-100g	13+1	4718947959089
137054	SO-F-1203MH	MH	Fast	12'0" / 360 cm	3pcs	30-70g	13+1	4718947959072
142042	SO-F-1203XH	XH	Fast	12'0" / 360 cm	3pcs	80-130g	13+1	4718947959096
142043	SO-F-1303H	H	Fast	13'0" / 390 cm	3pcs	50-100g	14+1	4718947959119
137055	SO-F-1303XH	XH	Fast	13'0" / 390 cm	3pcs	80-130g	14+1	4718947973245



**FEEDER**

**LS-6K FEEDER**

Slim and light weight 30T carbon blanks • Faster action with 2 different power tips • Exclusive Okuma BOPP blank covering • Gun-smoke SIC guides • Okuma DPS reel seat • Quality cork quality full handle • Supplied in quality rods bags



142046

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
142046	6K-F-1002M	M	Fast	10'0" / 300 cm	2pcs	30g	12+1	4718947067500
142047	6K-F-1102M	M	Fast	11'0" / 330 cm	2pcs	45g	12+1	4718947067517
142000	6K-F-1203H	H	Fast	12'0" / 360 cm	3pcs	60-120g	13+1	4718947055569
142048	6K-F-1203M	M	Fast	12'0" / 360 cm	3pcs	20-60g	13+1	4718947067524
142001	6K-F-1203MH	MH	Fast	12'0" / 360 cm	3pcs	40-80g	13+1	4718947067531
137023	6K-F-1303H	H	Fast	13'0" / 390 cm	3pcs	60-120g	14+1	4718947055576
137025	6K-F-1303MH	MH	Fast	13'0" / 390 cm	3pcs	40-80g	14+1	4718947073143
137022	6K-F-1303XH	XH	Fast	13'0" / 390 cm	3pcs	>150g	14+1	4718947054302
137024	6K-F-1403XH	XH	Fast	14'0" / 420 cm	3pcs	>150g	15+1	4718947067555

**FEEDER**

**CEYMAR FEEDER**

Slim and balance carbon blank construction • Progressive action • Supplied with 3 solid tips in tube • Quality stainless steel frame guides • Polished Titanium Oxide guide inserts • Okuma DPS reel seat • Quality cork and EVA handles • Supplied in quality rods bag



137706

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
137706	C-F-1003MH	MH	Fast	10'0" / 300 cm	3pcs	40-80g	12+1	4718947035035
136712	C-F-1203H	H	Fast	12'0" / 360 cm	3pcs	60-120g	13+1	4718947026163
136710	C-F-1203MH	MH	Fast	12'0" / 360 cm	3pcs	40-80g	13+1	4718947026149
142021	C-F-1203MH-1	MH	Fast	12'0" / 360 cm	3pcs	>60g	13+1	4718947026217
136713	C-F-1303H	H	Fast	13'0" / 390 cm	3pcs	60-120g	14+1	4718947026170
136711	C-F-1303MH	MH	Fast	13'0" / 390 cm	3pcs	40-80g	14+1	4718947026156
136714	C-F-1303XH-1	XH	Fast	13'0" / 390 cm	3pcs	>150g	14+1	4718947026187
136715	C-F-1403XH-1	XH	Fast	14'0" / 420 cm	3pcs	>150g	15+1	4718947026194
148117	C-F-1103MH-1	MH	Fast	11'0" / 330 cm	3pcs	>60g	12+1	4718947026200

## MATCH/FEEDER

## CUSTOM BLACK FEEDER

Slim and light weight 30T carbon blanks • Fast action with 3 different power tips • Unique use of Bopp Blank protect film • Quality stainless steel guides • Okuma graphite reel seat • Supplied in quality rod bag



148143

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode	
Custom Black Feeder									
148143	CB-F-1003MH	MH	Fast	10'0" / 300 cm	3pcs	>80g	12+1	4718947042415	
148141	CB-F-1103MH	MH	Fast	11'0" / 330 cm	3pcs	>60g	12+1	4718947040756	
137016	CB-F-1203H	H	Fast	12'0" / 360 cm	3pcs	60-120g	13+1	4718947040725	
137001	CB-F-1203MH	MH	Fast	12'0" / 360 cm	3pcs	40-80g	13+1	4718947040718	
137002	CB-F-1303H	H	Fast	13'0" / 390 cm	3pcs	60-120g	14+1	4718947040732	
142017	CB-F-1303MH	MH	Fast	13'0" / 390 cm	3pcs	40-80g	14+1	4718947049612	
Custom Black Feeder Method									
142015	CB-F-1203MHF	MH	Fast	12'0" / 360 cm	3pcs	60g	13+1	4718947040763	
Custom Black Feeder River									
137017	CB-F-1303XH	XH	Fast	13'0" / 390 cm	3pcs	>150g	14+1	4718947040749	
142016	CB-F-1203XH	XH	Fast	12'0" / 360 cm	3pcs	150g	13+1	4718947075376	
142018	CB-F-1303XXH	XXH	Fast	13'0" / 390 cm	3pcs	180g	14+1	4718947075383	
137018	CB-F-1403XH	XH	Fast	14'0" / 420 cm	3pcs	>150g	15+1	4718947042323	

## MATCH/FEEDER

## CUSTOM BLACK MATCH

30T+40T Hi modulus carbon, slim, light weight and balanced blanks • Okuma Unique Bopp blank protect film • Quality stainless steel frame guides • Polished Titanium Oxide guide inserts • Okuma DPS pipe reel seat • Quality cork and EVA handles • Supplied in quality rods bag



137009

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode	
137009	CB-MA-1303	L	Fast	13'0" / 390 cm	3pcs	5-25g	12+1	4718947042422	
137003	CB-MA-1403	L	Fast	14'0" / 420 cm	3pcs	5-25g	13+1	4718947042439	

**MATCH/FEEDER**

**SOLITRON MATCH**

IM6 Construction • Titanium oxide guide inserts • Hard EVA & high quality cork handle • Stainless steel hooded reel seat • Aluminium butt cap with logo • Three piece construction



137062

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
137062	SO-M-1303M	M	Fast	13'0" / 390 cm	3pcs	5-25g	13+1	4718947959027
137045	SO-M-1403M	M	Fast	14'0" / 420 cm	3pcs	5-25g	14+1	4718947959041
137049	SO-M-1503M	M	Fast	15'0" / 450 cm	3pcs	5-25g	15+1	4718947959058

**MATCH/FEEDER**

**CEYMAR MATCH**

Light weight and balance carbon blank construction • Progressive action • Quality stainless steel frame guides • Polished Titanium Oxide guide inserts • Okuma DPS pipe reel seat • Quality cork and EVA handles • Supplied in quality rods bag



136716

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136716	C-M-1303M	M	Fast	13'0" / 390 cm	3pcs	5-25g	12+1	4718947027924
136718	C-M-1303MH	MH	Fast	13'0" / 390 cm	3pcs	10-35g	12+1	4718947074492
136717	C-M-1403M	M	Fast	14'0" / 420 cm	3pcs	5-25g	13+1	4718947027931

**SPINNING**

**AMIGO**

24T GT blank construction • Fast action • Motor sports design inspiration • Pure energy for fishing • Stainless steel frame SIC guides • Graphite cushions reel seat



137034

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
137034	AMG-S-806M-T	M	Fast	8'0" / 240 cm	Tele	10-30g	4+1	4718947072887
137035	AMG-S-906M-T	M	Fast	9'0" / 270 cm	Tele	10-30g	4+1	4718947072894



## SPINNING TELE

## AVENTA TELE ROD

High module Carbon blank construction • Wide range fast action tele rods • Visual tip section • High quality cork handle • High quality SIC guides • Okuma graphite and Alu reel seat • Alu screw butt cap • Delivered in cloth bag



148128

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148128	AVT-S-3507MH-T	MH	Fast	11'6"/350 cm	7	>120g	6+Tip	4718947032492 
149420	AVT-S-3507H-T	H	Fast	11'6"/350 cm	7	>150g	6+Tip	4718947032522 




## SPINNING TELE

## ALTERA TELE SPIN

24T ultra-light carbon blank construction • Slim blanks with fast action • Matt gunsmoke frame SIC guides • Okuma graphite reel seat • Aluminum screw end cap with non-skid rubber • Quality guide cover and cloth bag included



136676

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136676	ALTS-S-806M-T	M	Fast	8'0"/244 cm	7	15-40g	5+Tip	4718947054296 
137242	ALTS-S-1206H-T	H	Fast	12'0" / 360 cm	tele	50-100g	5+1	4718947048974 
137243	ALTS-S-1306H-T	H	Fast	13'0" / 390 cm	tele	60-120g	5+1	4718947058232 





## MATCH/FEEDER

## COMPETITION BOLO

Durable 24+30T carbon blank construction • Quality stainless steel light guides for Tele Bolo • Protected in a quality guide cover • Quality stainless steel plate reel seat • Supplied in a quality rod bag



142023

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
142023	Competition Bolo 4004MH	MH	Fast	13'3" / 400 cm	Tele	-	5+1	4718947072900 
142024	Competition Bolo 5005MH	MH	Fast	16'6" / 500 cm	Tele	-	6+1	4718947072917 
142025	Competition Bolo 6006MH	MH	Fast	19'8" / 600 cm	Tele	-	7+1	4718947072924 
142026	Competition Bolo 7007MH	MH	Fast	23'0" / 700 cm	Tele	-	8+1	4718947072931 








**MATCH/FEEDER**

**COMPETITION POLE**

Light weight carbon blank construction • Durable components • 6 different colors Purple, Yellow, Blue, Red, Green and Orange • Supplied in quality rods bag



148174

Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
148174	COMPETITION Pole 4004MH	MH	Fast	13'3" / 400 cm	Tele	-	1	4718947057747 
148175	COMPETITION Pole 5005MH	MH	Fast	16'6" / 500 cm	Tele	-	1	4718947057754 
148176	COMPETITION Pole 6006MH	MH	Fast	19'8" / 600 cm	Tele	-	1	4718947057761 
148183	COMPETITION Pole 7007MH	MH	Fast	23'0" / 700 cm	Tele	-	1	4718947062222 
148184	COMPETITION Pole 8008MH	MH	Fast	26'3" / 800 cm	Tele	-	1	4718947062239 







**MATCH/FEEDER**

**G-POWER TELE POLE**

Strong composite blank construction • Durable components



136996







Product Number	Model	Rod Power	Rod Action	Rod Length	Number Of Sections	Casting Weight	Number of Guides	Barcode
136996	G-Power Pole 3003M	M	Fast	10'0" / 300 cm	tele	100-200g	1	4718947058485 
137031	G-Power Pole 4004M	M	Fast	13'3" / 400 cm	tele	100-200g	1	4718947058492 
137041	G-Power Pole 5005M	M	Fast	16'6" / 500 cm	tele	100-200g	1	4718947058508 
142030	G-Power Pole 6006M	M	Fast	19'8" / 600 cm	tele	100-200g	1	4718947071521 
136765	G-Power Pole 7007M	M	Fast	23'0" / 700 cm	7	100-200g	1	4718947058522 
142031	G-Power Pole 8008M	M	Fast	26'3" / 800 cm	tele	100-200g	1	4718947058539 

**SPINNING**

**FIN CHASER “ X “ SERIES COMBOS**

Durable glass fiber rod blank construction • All models feature a comfortable EVA fore grip • Rear grip on 6'-7' combos feature split cork • Rear grips on 8' and larger combos is full EVA • Multi-disc oil felt drag washers • All models feature a 1 ball bearing drive system • Machined aluminum, anodized spool • Fin Chaser 8' and larger feature double foot guide construction • All Fin Chaser rods feature 2-pcs blanks for transportation



Product Number	Model	Color	Rod Power	Rod Length	Number Of Sections	Casting Weight	Bearings	Line Capacity	Features	Barcode
137152	FNX-602-30PK	Pink	ML	6'0" / 183cm	2	1/8-3/8oz	1BB	310/3, 250/4, 165/6	Reel model : FNX-30	4718947085665 
148209	FNX-662-30BL	Blue	M	6'6" / 198cm	2	1/8-1/2oz	1BB	310/3, 250/4, 165/6	Reel model : FNX-30	4718947085672 
137153	FNX-662-30PK	Pink	M	6'6" / 198cm	2	1/8-1/2oz	1BB	310/3, 250/4, 165/6	Reel model : FNX-30	4718947085689 
142579	FNX-662-30YL	Yellow	M	6'6" / 198cm	2	1/8-1/2oz	1BB	310/3, 250/4, 165/6	Reel model : FNX-30	4718947085696 
137154	FNX-70-40BL	Blue	MH	7'0" / 213 cm	2	1/4-3/4oz	1BB	-	Reel model : FNX-40	4718947087201 
137155	FNX-80-40BL	Blue	MH	8'0" / 244 cm	2	1/2-1 1/2oz	1BB	-	Reel model : FNX-40	4718947075895 

**SPINNING**

**STEELER XP COMBOS**

Durable glass fiber rod blank construction • Feature comfortable EVA fore and rear split grip • Multi-disc front drag washer system • All models feature a 1 ball bearing drive system • Reels are pre-spooled with monofilament line • All Steeler rods are 2-pcs for easy transportation






Orange



Green



Pink



Product Number	Model	Color	Rod Power	Rod Length	Number Of Sections	Casting Weight	Bearings	Features	Barcode
137956	SLXP-662-20BO	Orange	M	6'6" / 195 cm	2	1/8-1/2oz	1BB	Reel model : SLXP-20	4718947075871 
137957	SLXP-662-20GR	Green	M	6'6" / 195 cm	2	1/8-1/2oz	1BB	Reel model : SLXP-20	4718947085702 
137958	SLXP-662-20PK	Pink	M	6'6" / 195 cm	2	1/8-1/2oz	1BB	Reel model : SLXP-20	4718947085719 

**REEL ACCESSORIES**

**CAL'S UNIVERSAL DRAG AND GEAR GREASE**

Specially formulated to make reels perform at their absolute peak, the Okuma Cal's Universal Reel Grease offers the very best in component lubrication and corrosion protection. Safe for all metals and common plastics, the Okuma Cal's Universal Reel Grease is fortified with Teflon and polymers to provide superior heat and wear resistance. Enhance the function and performance of your favorite reels with the Okuma Cal's Universal Reel Grease.



Product Number	Model	Weight	Features	Barcode
Cal's universal drag and gear grease 100 g				
119589	PA1140	100 g	-	4718947702470 
Cal's universal drag and gear grease 30 g				
119587	PA1139	30 g	-	4718947702463 
Cal's universal drag and gear oil & gear kits				
119590	PA1141	-	Cal's universal grease 30g, 10ml fishing reel oil	4718947702456 